



STYLE
7001
BLACKOUT FABRIC

WEAVING
EXCELLENCE
WITH
INNOVATION



		SOLAR OPTICAL PROPERTIES				SHGC/G VALUE g-tot (glass & blind)	
Code	Color	TS	RS	AS	TV	SINGLE 1/4 CL	INSULATING 1 HA
STYLE 7001 - BLACKOUT							
S50	White	0	71	29	0	0.23	0.19
S56	Cocoa	0	71	29	0	0.23	0.19



PRODUCT CERTIFIED FOR
LOW CHEMICAL EMISSIONS
UL.COM/GG
UL 2818



**BEST
ENERGY
EFFICIENT
SOLUTION**



TS = Solar Transmittance
RS = Solar Reflectance
AS = Solar Absorptance
TV = Visual Transmittance


SHGC = Solar Heat Gain Coefficient

1/4 CL = 1/4" Clear Glass
1 HA = 1" Heat Absorbing Glass


Fabrics Installed Internally
Zero-Degree Profile Angle

For additional performance values,
test references and technical
definitions visit us at phifer.com.

S50 **White**

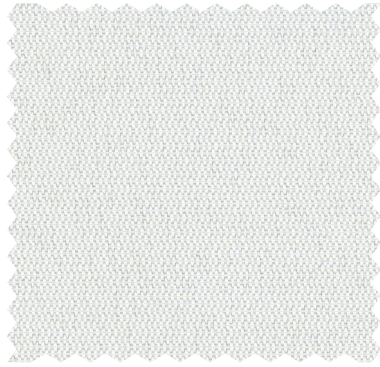


S51 **Birch**

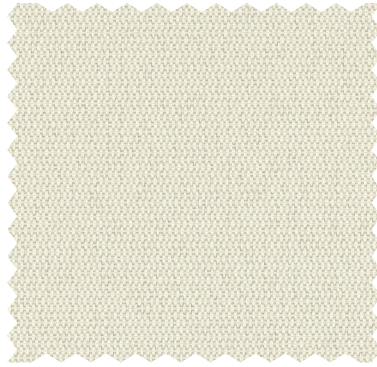


S52 **Sand**




S53 **Merino**

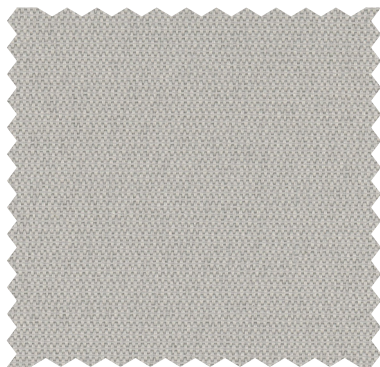


S59 **Canyon**

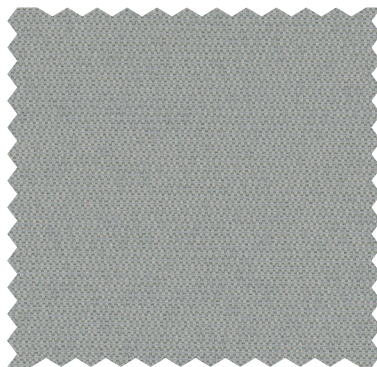


S55 **Canvas**

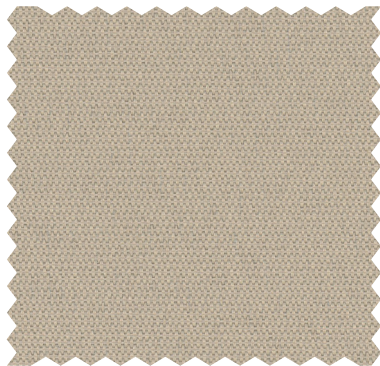


S54 **Mushroom**

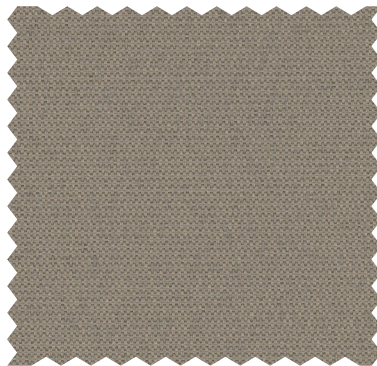


S60 **Porpoise**

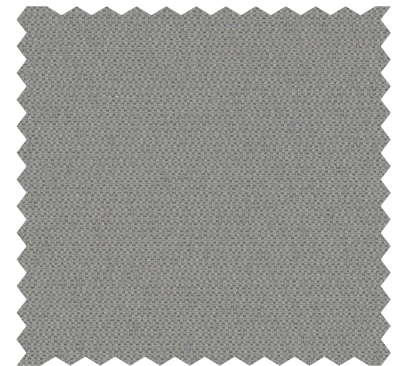

S57 **Graphite**

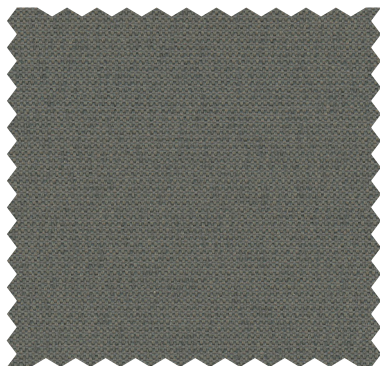

S56 **Cocoa**

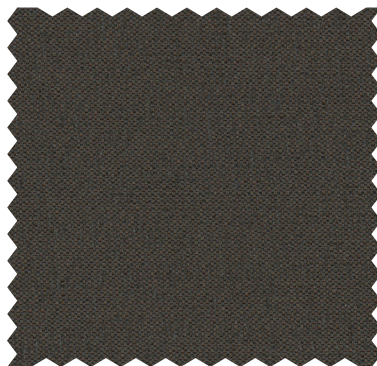

S58 **Onyx**



STYLE 7001 SPECIFICATIONS

Style 7001 is uniquely designed to provide total light blockage when complete room darkening is needed. With a broad range of decorator colors, the look and feel of rich cloth and a PVC-free composition, Style 7001 will enhance the beauty and function of both commercial and residential spaces. All Style 7001 colors have an off-white backing.

FIRE CLASSIFICATION

California U.S. Title 19 (small scale)
NFPA 101 (Class A Rating)
NFPA 701 TM#1 (small scale)
IBC Section 803.1.1 (Class A Rating)

BS 5867 Part 2 Type B Performance
CAN/CGSB2-4.162-M80
CAN/ULC-S 109 (large and small scale)

Fire classifications are subject to change. Please go to phifer.com for the most current information.

BACTERIA AND FUNGAL RESISTANCE

ASTM G21-96

ENVIRONMENTAL CERTIFICATION

GREENGUARD GREENGUARD Gold
Certified to these standards for low chemical emissions into indoor air during product usage

SAFE USE

RoHS Compliant REACH Compliant
ANSI/WCMA A 100.1-2007 for lead content US Consumer Product Safety Commission Section 101

WARRANTY

5-year interior

ACOUSTICAL PERFORMANCE

NRC (Noise Reduction Coefficient) and SAA (Sound Absorption Average) tested in accordance with ASTM C423-09a

UV PROTECTION

SheerWeave sun control fabrics are an effective way to reduce harmful UV rays. Phifer Incorporated is a proud member of the Skin Cancer Foundation's Corporate Council.

CLEANING INSTRUCTIONS

Fabric should be regularly dusted/vacuumed as appropriate. If commercial spot cleaners are used, they must first be tested and allowed to dry on an inconspicuous area to ensure compatibility.

Railroading this fabric is not recommended.

Colors may vary slightly from swatch samples. All variations are within industry standards.

STYLE 7001

WIDTHS

94" and 118"
238.8 cm and 300 cm

ROLL LENGTH

30 Linear Yards
27.4 Linear Meters

COMPOSITION

100% Polyester with Acrylic Flocked Backing

MESH WEIGHT

11.9 oz/yd²
403.47 g/m²

FABRIC THICKNESS

0.023 in
0.58 mm

OPENNESS FACTOR

Opaque

ACOUSTICAL VALUE

Testing in progress.

PHIFER
INCORPORATED

P. O. Box 1700 • Tuscaloosa, Alabama 35403-1700 USA
Phone: 205.345.2120 • FAX: 205.391.0799
Toll Free USA/Canada: 1.800.221.5497
phifer.com • ISO Registered



© SheerWeave is a registered trademark of PHIFER INCORPORATED.
™ UL, the UL logos and the UL mark are trademarks of UL LLC.
Photo courtesy of Draper Inc., Spiceland, Indiana, USA.
© PHIFER INCORPORATED V25 061325 3049733