



## 121-Series Reverse Osmosis Membranes



**65** psi  
Operating Pressure

- ✓ World Class Manufacturing Facility
- ✓ Advance Membrane Technology
- ✓ Precision Manufacturing Tolerances
- ✓ 35+ Combined Years Experience

### Features

- High Recovery Design, up to 50%
- Semi-Automated Manufacturing
- NSF Approved Buna-N Dual O-Rings
- • 100% Vacuum Decay Test
- Shipped Dry

Ph: 866-851-4566

Fax: 951-200-4391


E-Mail: [info@advantechaqua.com](mailto:info@advantechaqua.com)

Web: [www.advantechaqua.com](http://www.advantechaqua.com)



MODEL	121-1812-50	121-1812-75	121-1812-100	121-1812-150	121-3012-500
Part Number	61114	61115	61116	61117	61118
<b>Flow Specifications</b>					
Permeate Flow gpd	50 gpd	75 gpd	100 gpd	150 gpd	500 gpd
Permeate Flow lph	7.88 lph	11.83 lph	15.77 lph	23.66 lph	158 lph
Nominal Rejection	93%	93%	93%	93%	93%
<b>Operating Limits</b>					
Max Temperature F°	113	113	113	113	113
Max Temperature C°	45	45	45	45	45
Max Feed Flow gpm	2	2	2	2	3
Max Feed Flow lpm	7.60	7.60	7.60	7.60	11.35
Max Feed SDI	5	5	5	5	5
pH Range	2-11	2-11	2-11	2-11	2-11
Chlorine Tolerance	< 0.1 ppm	< 0.1 ppm	< 0.1 ppm	< 0.1 ppm	< 0.1 ppm
<b>Element Dimensions</b>					
A (inch / mm)	11.74" 298 mm	11.74" 298mm	11.74" 298mm	11.74" 298mm	11.74" 298mm
B (inch / mm)	.98" 25mm	.98" 25mm	.98" 25mm	.98" 25mm	.87" 22mm
C (inch / mm)	.67" 17mm	.67" 17mm	.67" 17mm	.67" 17mm	.67" 17mm
D (inch / mm)	1.65" 42mm	1.83" 46.5mm	1.83" 46.5mm	1.99" 50.5mm	3.01" 76.5mm
E (inch / mm)	9.57" 243mm	9.57" 243mm	9.57" 243mm	9.57" 243mm	10.3" 261mm

Permeate flow and salt rejection based on the following test conditions: 500 ppm softened tap water, 77°F (25°C), 15% recovery at 100psi. Minimum salt rejection is 96%. Membrane production can vary +/- 20%

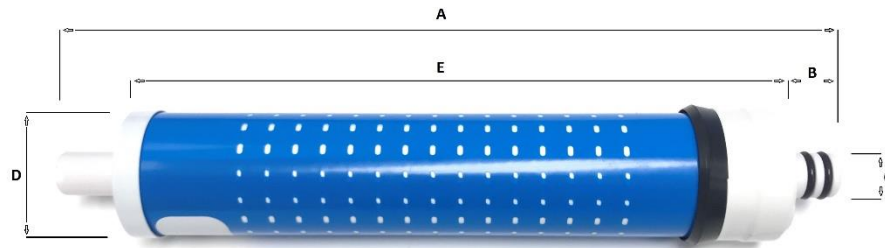

It is recommended that systems using these elements rinse the elements for 24 hours, prior to first use. Permeate water obtained from the first hour of use should be discarded to the drain. To ease installation, it is recommended to use a lubricant safe for indirect water contact on all seals. Keep elements moist at all times after initial wetting. • To prevent biological growth during prolonged system shutdowns, it is recommended that membrane elements be immersed in a preservative solution. Rinse out the preservative before use. • The membrane shows some resistance to short-term attack by chlorine (hypochlorite). Continuous exposure may damage the membrane and should be avoided.