



SOUNDVISION TECHNOLOGIES // TRUAUDIO // VSSL // 2023

VSSL



NATIVE STREAMING™



Chromecast built-in




Alexa Cast

STREAM FROM APPS YOU ALREADY KNOW AND USE
NO THIRD PARTY APPS NECESSARY



THE POWER OF VOICE CONTROL

GOOGLE ASSISTANT | SIRI | ALEXA

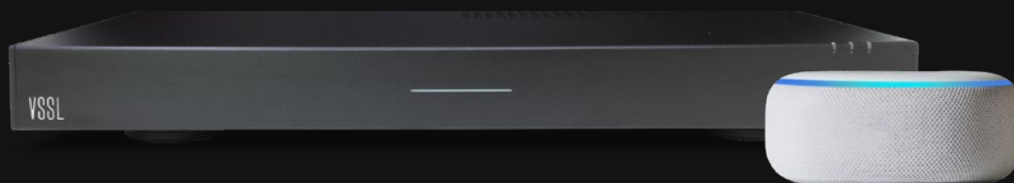

DRIVERS



SET YOUR MUSIC FREE™



RESIDENTIAL DISTRIBUTED AUDIO

Homeowners can now walk into their home, use their phone and open their favorite music service app. Playlist pulled up and playing, the homeowner effortlessly finds the name of the room they want to play music in with two button clicks and boom, their music has been set free. The VSSL A.6x is wired up directly to twelve TruAudio G91 speakers to provide six rooms of music bliss.

COMMERCIAL

The business owner wants to assure music is always on and playing in key areas of his office during business hours, but doesn't want to pay for an expensive automation system to make it happen. The lobby, the showroom and the design center are his areas of focus. The VSSL A.3x is wired up directly to a pair of TruAudio Beat Drops in the lobby, a pair of PP-6 in the showroom and a pair of PP-6 in the design center. Leveraging Google Routines, the business owner can now assure his clients are enjoying music as they make buying decisions.



A.6x

Zones: 6
Channels: 12
Output Power: 50 watts/ch @8/4Ω
Inputs: (6) matrixed analog, (1) optical, (1) IR, (1) network
WiFi Audio: AirPlay 2 / Chromecast built-in
 Spotify Connect / Alexa Cast
WiFi: N/A
Outputs: (6) matrixed analog, (1) network
EQ: 7-band adjustable
Sub Out: ---
S/N Ratio: >101 dB
Frequency Response: 20Hz - 50kHz
Operating Voltage: 115-230 VAC 50/60 Hz auto switch
Rack Space: 2U
Dimensions No Feet: 17" W x 3.46" H x 14" D
Dimensions With Feet: 17" W x 4.7" H x 14" D



A.3x

Zones: 3
Channels: 6
Output Power: 50 watts/ch @8/4Ω
Inputs: (3) matrixed analog, (1) optical, (1) IR, (1) network
WiFi Audio: AirPlay 2 / Chromecast built-in
 Spotify Connect / Alexa Cast
WiFi: N/A
Outputs: (3) matrixed analog, (1) network
EQ: 7-band adjustable
Sub Out: ---
S/N Ratio: >101 dB
Frequency Response: 20Hz - 50kHz
Operating Voltage: 115-230 VAC 50/60 Hz auto switch
Rack Space: 1U
Dimensions No Feet: 17" W x 1.72" H x 10.6" D
Dimensions With Feet: 17" W x 2.42" H x 10.6" D



A.1x

Zones: 1
Channels: 2
Output Power: 35 watts @ 8Ω RMS, 50 watt @ 4Ω RMS
Inputs: (1) analog, (1) optical, (1) digital coax, (1) IR, (1) network
WiFi Audio: AirPlay 2 / Chromecast built-in
 Spotify Connect / Alexa Cast / Bluetooth
WiFi: 2.4/5.0 GHz dual antenna MIMO
Outputs: (1) analog, (1) optical, (1) digital coax, (1) network
EQ: 7-band adjustable
Sub Out: RCA, adjustable cross over 55-200 Hz or by-pass for full range
S/N Ratio: >98 dBA-weighted
Frequency Response: 20Hz - 20kHz
Operating Voltage: 115-240 VAC 50/60 Hz auto switch
Rack Space: 1U
Dimensions No Feet: 7.44" W x 1.69" H x 8.69" D
Dimensions With Feet: 7.44" W x 2" H x 8.69" D

VSSL.

SX SERIES



5.1

WIRELESSLY PAIR TWO SX SPEAKERS WITH A SX SOUNDBAR AND SX SUBWOOFER TO CREATE AN IMMERSIVE 5.1 SURROUND SOUND EXPERIENCE.

BMR

BALANCED MODE RADIATORS (BMRs) COMBINE BENDING WAVE MODE TECHNOLOGY WITH PISTONIC MOTION TO CREATE FULL AUDIO RANGE, WIDE DIRECTIVITY SPEAKER DRIVERS FOR CRYSTAL CLEAR HIGHS AND LOWS.



NATIVE STREAMING™ IS THE SIMPLEST WAY TO STREAM YOUR MUSIC TO YOUR AUDIO SYSTEM. STREAM FROM APPS YOU ALREADY KNOW. NO THIRD PARTY APPS NECESSARY.

VSSL

VSSL




SX SOUND BAR

Speakers: 3 wide-dispersion BMR drivers
Woofers: 2 active down-firing woofers
Amplifier: X Class-D digital amplifiers
System Requirements: TV with HDMI ARC or optical digital audio output, broadband internet and the VSSL App
Wireless Connectivity: Connects to WiFi network with any 802.11 b/g/n, 2.4GHz broadcast-capable router
EQ: Advanced EQ settings
Ethernet Ports: (2) 10/100 Mbps Ethernet ports

Room Correction: Dynamically tunes the soundbar to the unique acoustics of the room or area (iOS device required)
Power Supply: Auto-switching 100-240V ~50-60 Hz 2 A AC universal input
Weight: 18.2 lbs
Dimensions: L: 42" (1067mm) x W: 6" (154mm) H: 3.3" (84mm)
Multiple Orientations: Tabletop or wall mounted
Control: TV remote or VSSL App

SX SPEAKER

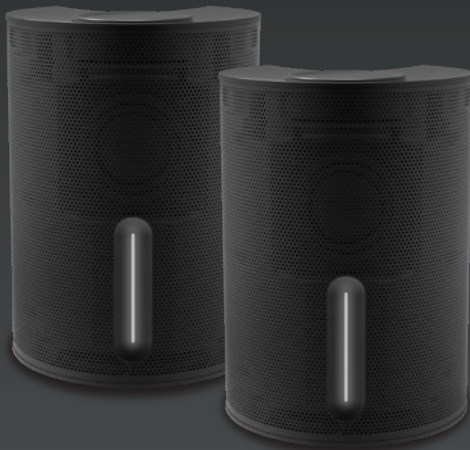

Speakers: 1 wide-dispersion BMR driver
Woofers: 1 active down-firing 4" woofer
Stereo Pair: Turn two speakers into separate left and right channel speakers
Home Theater: Add two SX Speakers as surrounds to a SX Soundbar
Stream: AirPlay2, Google Cast, Alexa Cast, and Spotify Connect
Voice: Compatible and controllable with Siri, Google Assistant, and Alexa
Wireless Connectivity: Connects to WiFi network with any 802.11 a/b/g/n, 2.4 or 5 GHz broadcast-capable speaker
EQ: Advanced EQ settings
Ethernet Ports: (2) 10/100 Mbps Ethernet ports
Room Correction: Dynamically tunes the soundbar to the unique acoustics of the room or area (iOS device required)
Power Supply: Auto-switching 100-240V ~50-60Hz 2 A AC universal input
Weight: 4.6 lbs
Dimensions: H: 7.9" (202mm) x W: 5.7" (145mm) D: 5.8" (149mm)
Multiple Orientations: Tabletop placement or wall mounted with .25"-20 thread universal mount

SX SUBWOOFER



Speakers: 10" Honeycomb
Amplifier: Class-D digital amplifier
Dual Acoustic Ports: Tuned to enhance subwoofer performance
All Digital Sound: All filter settings, active equalization, and time alignment are done digitally through DSP circuitry for zero-loss audio quality and energy
EQ: Advanced EQ settings
Ethernet Ports: (2) 10/100 Mbps Ethernet ports (optional)
Wireless Connectivity: Connects to any SX Soundbar or SX Speaker
Power Supply: Auto-switching 100-240V ~50-60 Hz 2 A AC universal input
Weight: 29.8 lbs
Dimensions: L: 21.7" (550mm) x W: 16.9" (431mm) H: 4.4" (111mm)
Multiple Orientations: Fix in stand upright or lay flat



SET YOUR MUSIC FREE™

SELECT SERIES™

S63 | S63i

OFFSET
TRIPLE
TWEETER
ARRAY

LONG
THROW
DRIVERS

MMAG
DRIVERS

BI-WIRE
(S63 ONLY)



Speaker Type: Bookshelf cabinet, bi-wire sealed LCR
Woofer: (2) 6.5" extreme high excursion MMAG mid bass drivers
Tweeter: (3) 1" triple array silk soft dome
Power: 300 watts
Impedance: 8Ω
Freq Response: -3dB down point 58Hz
Sensitivity: 87dB
Grill Type: Aluminum, frameless
Finish: Black brushed aluminum
Cutout Dims: N/A
Finish Dims: H: 19" (482mm) x L: 9.9" (251.5mm) x W: 10" (254mm)



Speaker Type: In-wall LCR
Woofer: (2) 6.5" extreme high excursion MMAG mid bass drivers
Tweeter: (3) 1" triple array silk soft dome
Power: 300 watts
Impedance: 8Ω
Freq Response: -3dB down point 58Hz
Sensitivity: 87dB
Grill Type: Aluminum, frameless
Finish: Black brushed aluminum
Cutout Dims: H: 17.27 (438.7mm) x W: 8.27" (210.05mm)
Finish Dims: H: 18.8" (478.5mm) x W: 9.84" (249.9mm) x D: 3.9" (99.1mm)



SELECT SERIES™

W12 | SC12

AXIALLY
ALIGNED
OPPOSING
12" DRIVERS

EXTENDED 3"
PEAK-TO-PEAK
CONE TRAVEL

ICE
POWER
AMP

MULTIPLE
FINISHES

12"
DRIVER

STANDARD
OR DIAMOND
ORIENTATION



W12
Speaker Type: Dual 12" powered subwoofer
Woofers: (2) 12" axially aligned opposing with 3" excursion
Power: 700 watts
Freq Response: F3 of 22Hz
Amp Protection: ICE power
Controls: Gain, LF adjust, crossover, delay, 12V trigger
Inputs: (1) LFE, (1) RCA, (1) XLR
Outputs: (1) XLR
Cabinet Finish: Satin black
Cabinet Dims: H: 23.96" (606.2mm) x L: 20.23" (513.9mm) x W: 16.3" (414.3mm)



SC12
Speaker Type: 12" powered subwoofer
Woofers: 12" aluminum with 3" excursion
Power: 350 watts
Freq Response: F3 of 22Hz
Amp Protection: ICE power
Controls: Gain, LF adjust, crossover, delay, 12V trigger
Inputs: (1) LFE, (1) RCA, (1) XLR
Outputs: (1) XLR
Cabinet Finish: Satin black, white, oak, walnut, custom
Cabinet Dims: H: 15" (381mm) x L: 14" (356mm) x W: 14" (356mm)



ELITE

SERIES

TRUGRIP™
PATENTED WITH SWARM TECHNOLOGY

New Toolless Design
TruGrip technology, a 2-step mechanical dogear, ensures the tightest grip with zero sag.



Speaker Type:
Woofer:
Midrange:
Tweeter:
Power:
Impedance:
Freq Response:
Sensitivity:
Grill Type:
Rough-in Ring:
Finish Dims:

Cutout Dims:

Family:



ELITE46

In-wall, 3-way
(3) 6.5" red carbon fiber
(1) 6.5" carbon fiber
1" titanium,
250 watts
8 Ω
36 - 20k Hz (+/-3 dB)
91 dB
Microperf, frameless
RW-E46/26
32.4" (823 mm) L,
10.0" (255 mm) W,
4.0" (102mm) D,
31.625" (803 mm) L,
9.25" (235mm) W



ELITE26

In-wall, 3-way
(2) 6.5" red carbon fiber

1" titanium,
200 watts
8 Ω
36 - 20k Hz (+/-3 dB)
90 dB
Microperf, frameless
RW-E46/26
19.4" (492 mm) L,
10.0" (255 mm) W,
4.0" (102mm) D,
18.625" (472 mm) L,
9.25" (235mm) W



Speaker Type:
Woofer:
Midrange:
Tweeter:
Power:
Impedance:
Freq Response:
Sensitivity:
Grill Type:
Finishes:
Finish Dims:

Family:



ELITE46-TOWER

Tower, 3-way
(3) 6.5" carbon fiber
(1) 6.5" carbon fiber
1" titanium
250W
8Ω
33-20kHz
91 dB
Black Cloth
Black, Cherry, Maple, Walnut
8" (203mm) L,
10.25" (260mm) W,
43" (1143mm) H



ELITE26-CC

Cabinet, 2-way
(2) 6.5" carbon fiber

1" titanium
200W
8Ω
34-20kHz
90 dB
Black Cloth
Black, Cherry, Maple, Walnut
L: 19" (483mm) x
W: 10.25" (260mm) x
H: 8" (203mm)




ELITE26-BS


Bookshelf, 2-way
6.5" carbon fiber

1" titanium
200W
8Ω
38-20kHz
90 dB
Black Cloth
Black, Cherry, Maple, Walnut
L: 8" (203mm) x
W: 10.25" (260mm) x
H: 12.75" (329mm)



OPTIONAL FINISHES



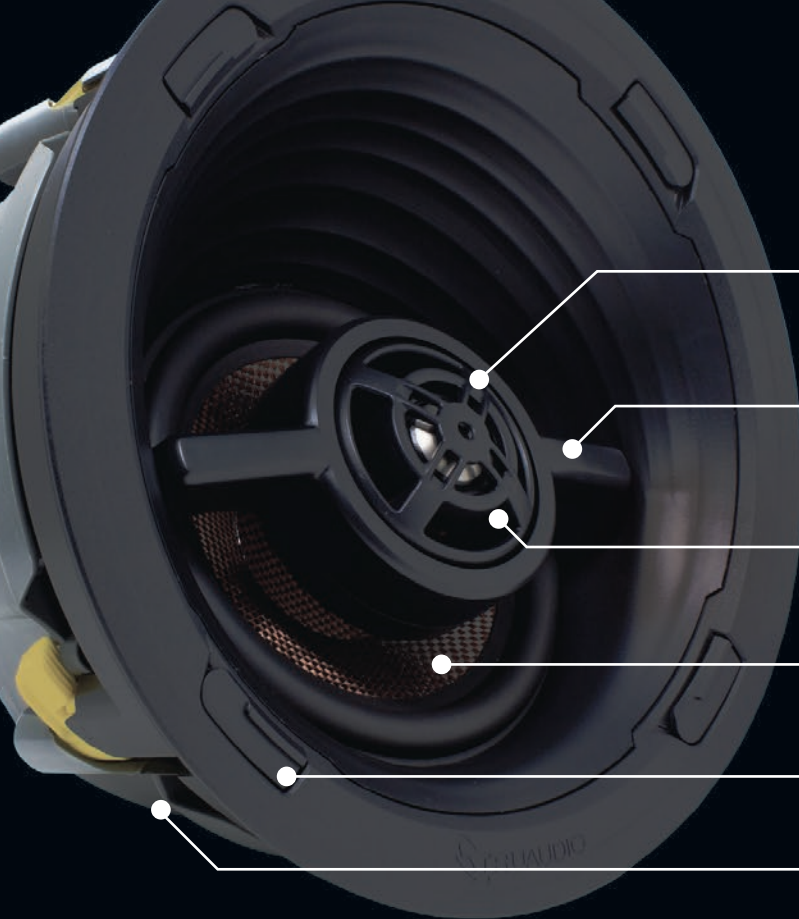

DIRECTIONAL TWEETER

**ANGLED TWEETER
BRIDGE HANDLE**

3" MIDRANGE

7" ANGLED DRIVER

TRUGRIP TOOLLESS DESIGN

PROTECTIVE BACK BOX



Quick. Easy. Secure.

The fastest way to terminate a speaker. Connect speaker wire to rough-in ring during pre-wire, then use the Quick Connect cable to tether to the speaker's Quick Connect.



New Toolless Design

TruGrip technology, a 2-step mechanical dogear, ensures the tightest grip with zero sag.



REV71

Speaker Type: In-ceiling angled, 3-way
Woofer: 7" woven carbon fiber
Midrange: 3" carbon fiber, swivel
Tweeter: 1" titanium, swivel
Power: 175 watts
Impedance: 8 Ω
Freq Response: 36 - 20k Hz (+/-3 dB)
Sensitivity: 92 dB
Grill Type: Microperf, frameless
Rough-in Ring: RC-879
Finish Dims: 10.5" (267 mm) diameter
6.0" (152 mm) deep
9.9" (251 mm) diameter

Family:



REV71SUR

In-ceiling angled, surround
7" woven carbon fiber

(2) 1" titanium, swivel
175 watts
8 Ω
36 - 20k Hz (+/-3 dB)
92 dB
Microperf, frameless
RC-879
10.5" (267 mm) diameter
6.0" (152 mm) deep
9.9" (251 mm) diameter



REV72

In-ceiling angled, 3-way
7" polypropylene
3" polypropylene, swivel
1" silk dome, swivel
150 watts
8 Ω
38 - 20k Hz (+/-3 dB)
91 dB
Microperf, frameless
RC-879
10.5" (267 mm) diameter
6.0" (152 mm) deep
9.9" (251 mm) diameter




REV72SUR

In-ceiling angled, surround
7" polypropylene

(2) 1" silk dome, swivel
150 watts
8 Ω
38 - 20k Hz (+/-3 dB)
91 dB
Microperf, frameless
RC-879
10.5" (267 mm) diameter
6.0" (152 mm) deep
9.9" (251 mm) diameter



Optional:



Black
Micro-Perf Frameless
Grills

Square grills
for entire REV Series



Paintable

GHT/CT-4 Series



Speaker Type: In-wall LCR
Woofers: (2) 5.25" injected poly
Tweeter: 1" silk soft dome
Power: 100 watts
Impedance: 8 Ω
Freq Response: 40 - 20k Hz (+/-3 dB)
Sensitivity: 90 dB
EQ Adjustments: Tweeter & woofer -3, 0, +3
Grill Type: Ghost style, frameless black and white included
Finish Dims: 14.1" (359mm) H, 8.5" (216mm) W, 3.6" (92mm) D
Cutout Dims: 13" (330mm) H, 7.5" (191mm) W

Family:




GHT-SUR-P
Speaker Type: In-wall surround
Woofers: 6.5" injected poly
Tweeter: (2) 1" silk soft dome
Power: 125 watts
Impedance: 8 Ω
Freq Response: 60 - 20k Hz (+/-3 dB)
Sensitivity: 89dB
EQ Adjustments: Tweeter & woofer -3, 0, +3
Grill Type: Ghost style, frameless black and white included
Finish Dims: 17" (432mm) H, 9.3" (237mm) W, 3.9" (99mm) D
Cutout Dims: 15.8" (402mm) H, 8" (203mm) W



GHT-66P
Speaker Type: In-wall LCR
Woofers: (2) 6.5" injected poly
Tweeter: 1" silk soft dome, waveguide
Power: 125 watts
Impedance: 8 Ω
Freq Response: 60 - 20kHz (+/-3 dB)
Sensitivity: 91dB
EQ Adjustments: Tweeter & woofer -3, 0, +3
Grill Type: Ghost style, frameless black and white included
Finish Dims: 20.1" (511mm) H, 9.1" (231mm) W, 3.7" (94mm) D
Cutout Dims: 18.9" (480mm) H, 8" (203mm) W




CT-4
Speaker Type: Bookshelf speaker, rear ported
Woofers: 4" coated glass fiber woofer
Tweeter: 1" aluminum
Power: 5 - 40 watts
Impedance: 8 Ω
Freq Response: 85 - 20K Hz (+/-3 dB)
Sensitivity: 89 dB (2.83 v/1 meter, +3dB)
EQ Adjustments: ---
Grill Type: Black cloth
Finish Dims: 8.8" (224mm) H, 5.6" (142mm) W, 6.8" (173mm) D




BANDPASS SUBWOOFER

Speaker Type: Bandpass subwoofer
Woofers: 12" aluminum
Power: 350 watts
Impedance: 4 Ω
Freq Response: 35 - 120 Hz (+/-3 dB)
Sensitivity: 88dB
Grill Type: Ghost style, frameless
Finish Dims: 17" (432mm) H, 17" (432mm) W, 11" (279mm) D


Family:



Optional



Toe Kick
BP-KICK-SET
White



Square Grill
Paintable




QUICK CONNECT
COMPATIBLE

IC-SUB-8 PAIRS WITH D16 AMPLIFIER

Speaker Type: In-Ceiling Subwoofer
Driver: 8" Polypropylene
Power: 75-150W
Impedance: 8Ω
Freq Response: 38-140Hz
Max dB Output: 98
Grill Type: Ghost style, frameless
Tweeter: None
Weight: 6.7 lbs
Depth: 7.9" (201 mm)
Cut Out Diameter: 9.4" (238 mm)
Finish Diameter: 10.6" (269 mm)

Family:



Trident / Trunami Series



TRUNAMI-DSP-PAK
Speaker Type: Passive in-wall subwoofer
Woofers: One 8" active driver and two 6.5" passive drivers
Power: 250 watts
Impedance: 8 Ω
Freq Response: 32-180 Hz (+/-3dB)
Voice Coil: 4-Layer copper
Grill Type: Magnetic white cloth and paintable white included
Finish Dims: 18.8" (478mm) H, 17.3" (439mm) W, 4.4" (112mm) D
Cutout Dims: 17.4" (442mm) H, 14.4" (366mm) W, 3.9" (99mm) D
Room Size: ---
Includes: (1) Trunami Subwoofer
Family: (1) TRU-S500DSP Amplifier



TRUNAMI-DSP-2PAK
Includes:
 (2) Trunami-SUB
 (1) TRU-S500DSP Amplifier



FLSUB8
Speaker Type: Powered subwoofer
Woofers: (1) 8" active driver and (1) 8" passive down firing driver
Power: 250 watts
Impedance: 8 Ω
Freq Response: 25-200 Hz (+/-3dB)
Grill Type: Cloth
Finish Dims: 10.5" (267mm) H, 12" (305mm) W, 11" (280mm) D
Cutout Dims: ---



CSUB-12

Speaker Type: Powered subwoofer
Enclosure Design: Dual passive radiators tuned enclosure.
Driver: 12" polymer bonded cellulose
Power: 350 watts internal amplifier
Frequency Range: 20-200Hz (+/-3 dB)
Crossover: 40-200Hz continuously variable low pass
Peak Rating: 550 W
Boost: 8dB@40Hz
Inputs: 1) RCA L/R 2) LFE 3) High Level Input
Grill Type: Black cloth
Cabinet Dimensions: 14.9" (379mm) H, 15.2" (386mm) W, 15.8" (402mm) D
Certifications: CE, RCM, TUV, FCC
Cabinet Finish: Black semi-gloss
Family:



UNIVERSAL



CSUB-10

Speaker Type: Powered subwoofer
Enclosure Design: Dual passive radiators tuned enclosure.
Driver: 10" polymer bonded cellulose
Power: 250 watts internal amplifier
Frequency Range: 25-200Hz (+/-3 dB)
Crossover: 40-200Hz continuously variable low pass
Peak Rating: 450 W
Boost: 9dB@35Hz
Inputs: 1) RCA L/R 2) LFE 3) High Level Input
Grill Type: Black cloth
Cabinet Dimensions: 13.1" (333mm) H, 13.4" (341mm) W, 13.9" (353mm) D
Certifications: CE, RCM, TUV, FCC
Cabinet Finish: Black semi-gloss



UNIVERSAL



CSUB-8

Speaker Type: Powered subwoofer
Enclosure Design: (2) passive radiators tuned enclosure.
Driver: 8" polymer bonded cellulose
Power: 150 watts internal amplifier
Frequency Range: 28-200Hz (+/-3 dB)
Crossover: 40-200Hz continuously variable low pass
Peak Rating: 240 W
Boost: 8dB@40Hz
Inputs: 1) RCA L/R 2) LFE 3) High Level Input
Grill Type: Black cloth
Cabinet Dimensions: 11.8" (300mm) H, 11.9" (303mm) W, 12.6" (320mm) D
Certifications: CE, RCM, TUV, FCC
Cabinet Finish: Black semi-gloss



UNIVERSAL



SS-12

Speaker Type: Front firing, slot port
Driver: 12" coated cellulose composite
Power: 250 watt internal amplifier
Frequency Range: 25 - 140 Hz (+/-3 dB)
Crossover: 40-200 Hz continuously variable low pass
Peak Rating: 420 W
Inputs: 1) RCA L/R 2) LFE 3) High Level Input
Grill Type: Black cloth
Cabinet Dimensions: 18.5" (470mm) H (including feet)
15" (381mm) W
17" (432mm) D (including grill and amp)
Certifications: CE, RCM, TUV, FCC
Finish: Black, matte paint, textured vinyl
Family:



UNIVERSAL



SS-10

Speaker Type: Front firing, slot port
Driver: 10" coated cellulose composite
Power: 150 watt internal amplifier
Frequency Range: 30 - 150 Hz (+/-3 dB)
Crossover: 40-200 Hz continuously variable low pass
Peak Rating: 250 W
Inputs: 1) RCA L/R 2) LFE 3) High Level Input
Grill Type: Black cloth
Cabinet Dimensions: 16" (407mm) H (including feet)
13.4" (340mm) W
16" (406mm) D (including grill and amp)
Certifications: CE, RCM, TUV, FCC
Cabinet Finish: Black, matte paint, textured vinyl



UNIVERSAL



SS-8


Speaker Type: Front firing, slot port
Driver: 8" coated cellulose composite
Power: 100 watt internal amplifier
Frequency Range: 33 - 190 Hz (+/-3 dB)
Crossover: 40-200 Hz continuously variable low pass
Peak Rating: 160 W
Inputs: 1) RCA L/R 2) LFE 3) High Level Input
Grill Type: Black cloth
Cabinet Dimensions: 14.5" (368mm) H (including feet)
12" (305mm) W
14" (356mm) D (including grill and amp)
Certifications: CE, RCM, TUV, FCC
Cabinet Finish: Black, matte paint, textured vinyl



UNIVERSAL

CSUB Series

SS Series

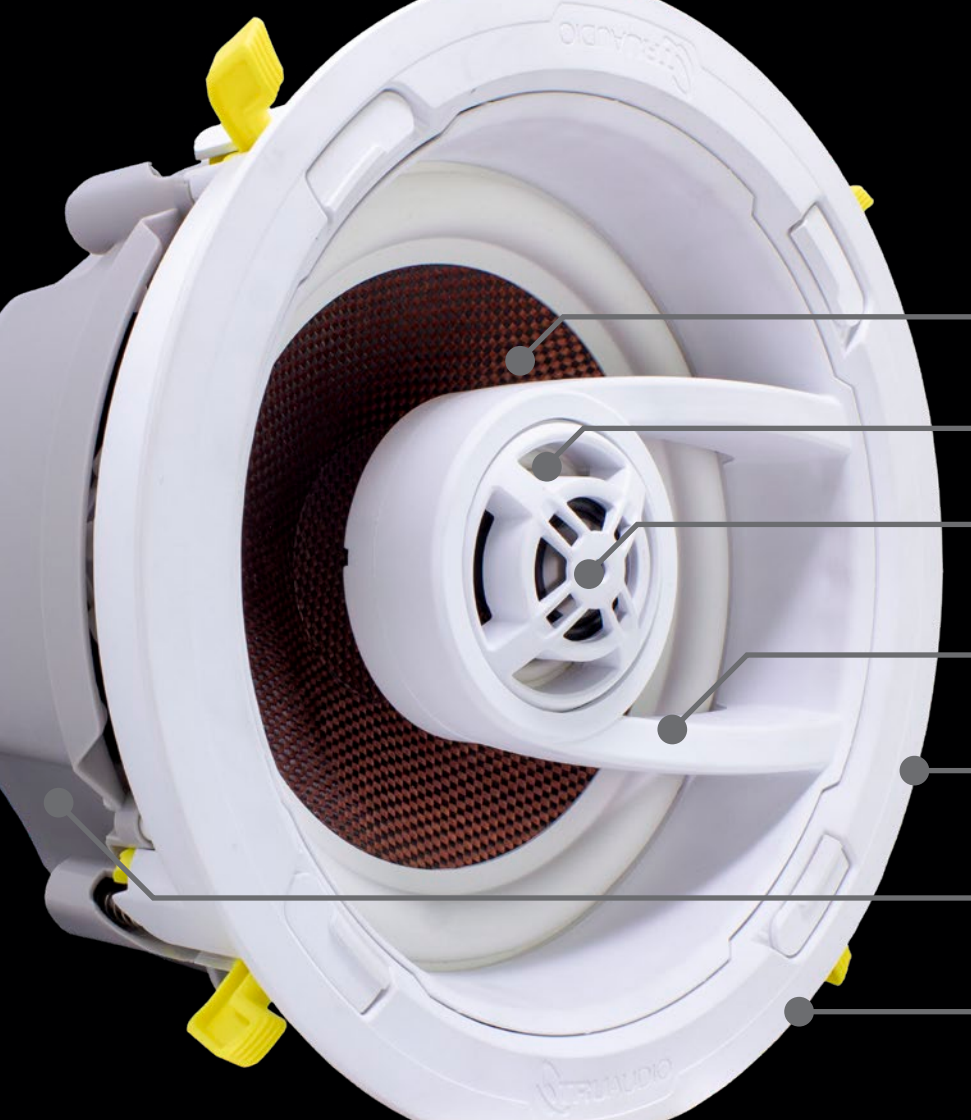

7" & 9" DRIVERS

3-WAY DESIGN
9" MODELS ONLY

DIRECTIONAL TWEETER

TWEETER BRIDGE
HANDLE

1 RING FOR BOTH SIZES
RC-879

PROTECTIVE BACKBOX

40% SMALLER REVEAL



QUICK CONNECT
COMPATIBLE

G91

Speaker Type: In-ceiling, 3 way
Woofer: 9" carbon fiber
Midrange: 3" carbon fiber
Tweeter: 1" titanium, swivel
Power: 25-175W
Impedance: 8Ω
Frequency Response: 32-20kHz
Sensitivity: 91dB
Grill Type: Microperf, frameless
Speaker Wire Connector: Quick Connect & Gold binding post
Finish Dimensions: Diameter: 10.51" (267mm)
Depth: 6" (152mm)
Cutout Dimensions: 9.9" (251mm)
Rough-in Ring: RC-879

Family:

GRAND CANYON



QUICK CONNECT
COMPATIBLE

G92

Speaker Type: In-ceiling, 3 way
Woofer: 9" white polypropylene
Midrange: 3" polypropylene
Tweeter: 1" silk dome, swivel
Power: 25-150W
Impedance: 8Ω
Frequency Response: 34-20kHz
Sensitivity: 90dB
Grill Type: Microperf, frameless
Speaker Wire Connector: Quick Connect & Gold binding post
Finish Dimensions: Diameter: 10.51" (267mm)
Depth: 6" (152mm)
Cutout Dimensions: 9.9" (251mm)
Rough-in Ring: RC-879

POWELL



QUICK CONNECT
COMPATIBLE

G71

Speaker Type: In-ceiling, 2 way
Woofer: 7" carbon fiber
Midrange: ---
Tweeter: 1" titanium, swivel
Power: 25-150W
Impedance: 8Ω
Frequency Response: 36-20kHz
Sensitivity: 90dB
Grill Type: Microperf, frameless
Speaker Wire Connector: Quick Connect & Gold binding post
Finish Dimensions: Diameter: 10.51" (267mm)
Depth: 3.9" (100mm)
Cutout Dimensions: 9.9" (251mm)
Rough-in Ring: RC-879

GRAND CANYON



QUICK CONNECT
COMPATIBLE

G72

Speaker Type: In-ceiling, 2 way
Woofer: 7" white polypropylene
Midrange: ---
Tweeter: 1" silk dome, swivel
Power: 25-125W
Impedance: 8Ω
Frequency Response: 38-20kHz
Sensitivity: 88dB
Grill Type: Microperf, frameless
Speaker Wire Connector: Quick Connect & Gold binding post
Finish Dimensions: Diameter: 10.51" (267mm)
Depth: 3.9" (100mm)
Cutout Dimensions: 9.9" (251mm)
Rough-in Ring: RC-879

POWELL

NEW AND IMPROVED CROSSOVER



Quick. Easy. Secure.


Simply connect speaker cable to the rough-in ring terminals during pre-wire. When it's time to install the speaker, use the Quick Connect™ cable to tether to the speaker's Quick Connect.

TRUGRIP™

PATENTED WITH SWARM TECHNOLOGY

New Toolless Design

The Ghost series incorporates TruGrip™ technology to streamline the installation process. TruGrip™ toolless technology is a two-step mechanical dogear ensuring the tightest grip with zero sag.

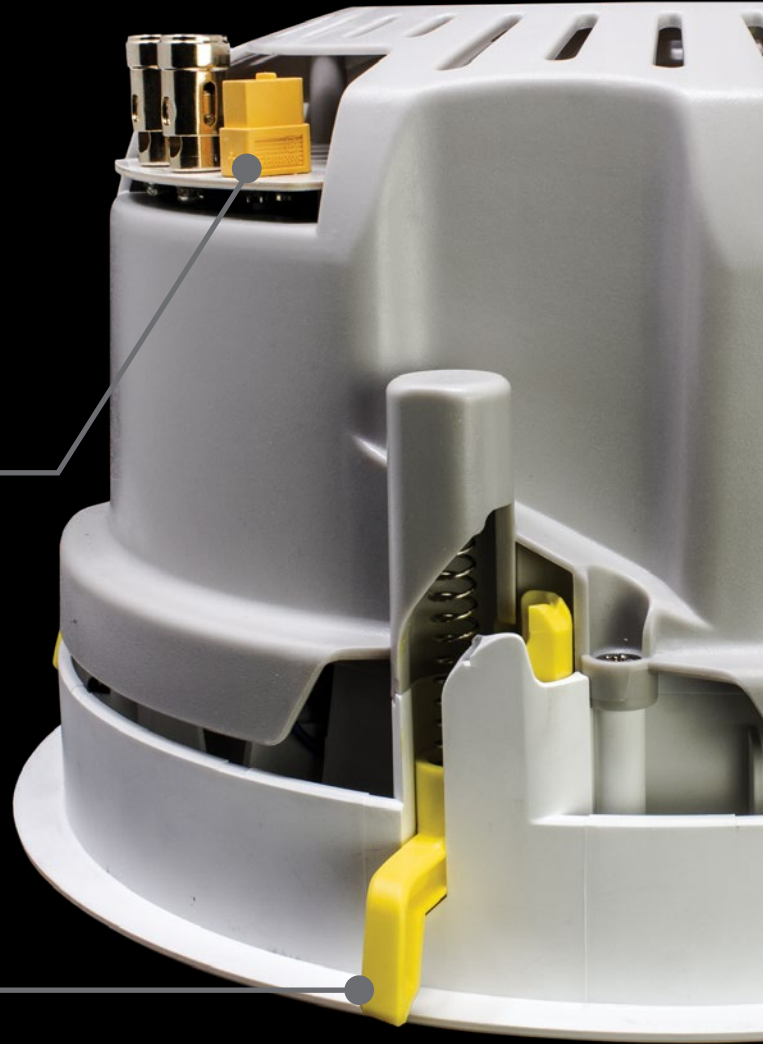

QUICK CONNECT
COMPATIBLE

GD71

Speaker Type:	In-ceiling, dual voice coil
Woofers:	7" carbon fiber
Midrange:	---
Tweeter:	(2) 1" titanium, swivel
Power:	25-150W
Impedance:	8Ω
Frequency Response:	36-20kHz
Sensitivity:	90dB
Grill Type:	Microperf, frameless
Speaker Wire Connector:	Quick Connect & Gold binding post
Finish Dimensions:	Diameter: 10.51" (267mm) Depth: 3.9" (100mm)
Cutout Dimensions:	9.9" (251mm)
Rough-in Ring:	RC-879
Family:	GRAND CANYON



QUICK CONNECT
COMPATIBLE

GD72

Speaker Type:	In-ceiling, dual voice coil
Woofers:	7" white polypropylene
Midrange:	---
Tweeter:	(2) 1" silk dome, swivel
Power:	25-125W
Impedance:	8Ω
Frequency Response:	38-20kHz
Sensitivity:	88dB
Grill Type:	Microperf, frameless
Speaker Wire Connector:	Quick Connect & Gold binding post
Finish Dimensions:	Diameter: 10.51" (267mm) Depth: 3.9" (100mm)
Cutout Dimensions:	9.9" (251mm)
Rough-in Ring:	RC-879
Family:	POWELL

Optional:



ELEMENT GRILLS
Weatherproof Grills
Treated with Weatherloc™
Technology by Sealoc
GR-ELEMENT-79



Black
Micro-Perf Frameless
Grills

Square grills
for entire Ghost Series



Paintable

NEW AND IMPROVED CROSSOVER

Phantom Series



QUICK CONNECT COMPATIBLE

PG-8
In-ceiling, 2 way
8" glass fiber
1" titanium
140 watts
8 Ω
39 - 20k Hz (+/- 3 dB)
90 dB
Ghost style, frameless
Powder coated galvanized steel
10.4" (265mm) diameter
3.9" (99mm) deep
9.7" (244mm) diameter

Family:  **MEAD** 



QUICK CONNECT COMPATIBLE

PG-6
In-ceiling, 2 way
6.5" glass fiber
1" titanium
125 watts
8 Ω
47 - 20k Hz (+/- 3 dB)
90 dB
Ghost style, frameless
Powder coated galvanized steel
8.9" (226mm) diameter
3.6" (91mm) deep
8.2" (208mm) diameter

Family:  **MEAD** 



QUICK CONNECT COMPATIBLE

PDP-8
In-ceiling, dual voice coil
8" injected polypropylene
(2) 1" silk soft dome
120 watts
8 Ω
50 - 20k Hz (+/- 3dB)
89 dB
Ghost style, frameless
Powder coated galvanized steel
10.4" (265mm) diameter
4" (101mm) deep
9.7" (244 mm) diameter


Family:  **POWELL** 

Optional:



ELEMENT GRILLS
Weatherproof Grills
Treated with Weatherloc™
Technology by Sealoc
GR-ELEMENT-6/8

Square grills
for entire Phantom and
Shadow Series



Paintable

Phantom Series



QUICK CONNECT COMPATIBLE

PP-8
In-ceiling, 2 way
8" injected polypropylene
1" silk soft dome
120 watts
8 Ω
42 - 20k Hz (+/- 3 dB)
90 dB
Ghost style, frameless
Powder coated galvanized steel
10.4" (265mm) diameter
4" (101mm) deep
9.7" (244mm) diameter

Family:  **POWELL** 



QUICK CONNECT COMPATIBLE

PP-6
In-ceiling, 2 way
6.5" injected polypropylene
1" silk soft dome
90 watts
8 Ω
52 - 20k Hz (+/- 3 dB)
90 dB
Ghost style, frameless
Powder coated galvanized steel
8.9" (226mm) diameter
3.4" (86mm) deep
8.2" (208mm) diameter

Family:  **POWELL** 



QUICK CONNECT COMPATIBLE

PP-4
In-ceiling, 2 way
4" injected polypropylene
0.75" silk soft dome
55 watts
8 Ω
65 - 20k Hz (+/- 3 dB)
89 dB
Ghost style, frameless
Powder coated galvanized steel
7.5" (190mm) diameter
2.8" (71mm) deep
6.6" (167mm) diameter

Family:  **POWELL** 



QUICK CONNECT COMPATIBLE

PDP-6
In-ceiling, dual voice coil
6.5" injected polypropylene
(2) 0.75" silk soft dome
100 watts
8 Ω
55 - 20k Hz (+/- 3 dB)
89 dB
Ghost style, frameless
Powder coated galvanized steel
8.9" (226mm) diameter
3.4" (86mm) deep
8.2" (208mm) diameter

Family:  **POWELL** 

Shadow Series



QUICK CONNECT COMPATIBLE

SP-8
In-ceiling, 2 way
8" polypropylene
1" mylar
90 watts
8 Ω
38 - 20k Hz (+/- 3 dB)
89 dB
Ghost style, frameless
Powder coated galvanized steel
10.4" (265mm) diameter
3.6" (91mm) deep
9.7" (244mm) diameter

Family:  **ARCHES** 



QUICK CONNECT COMPATIBLE

SP-6
In-ceiling, 2 way
6.5" polypropylene
0.75" mylar
75 watts
8 Ω
53 - 20k Hz (+/- 3 dB)
89 dB
Ghost style, frameless
Powder coated galvanized steel
8.9" (226mm) diameter
3.4" (86mm) deep
8.2" (208mm) diameter

Family:  **ARCHES** 



TruWhite Micro-Perf Frameless Grill

**CP-6**

Speaker Type: In-ceiling, 2 way
Woofers: 6.5" polypropylene
Tweeter: 0.75" silk soft dome, swivel
Power: 80 watts
Impedance: 8 Ω
Freq Response: 52 - 20k Hz (+/-3 dB)
Sensitivity: 90 dB
Grill Type: Micromesh, aluminum
Finish Dims: 9.5" (241mm) diameter
 3.1" (79mm) deep
Cutout Dims: 8.3" (211mm) diameter

Family:

**CPD-6**

Speaker Type: In-ceiling, dual voice coil
Woofers: 6.5" polypropylene
Tweeter: (2) 0.75" silk soft dome, swivel
Power: 80 watts
Impedance: 8 Ω
Freq Response: 52 - 20k Hz (+/-3 dB)
Sensitivity: 90 dB
Grill Type: Micromesh, aluminum
Finish Dims: 9.5" (241mm) diameter
 3.1" (79mm) deep
Cutout Dims: 8.3" (211mm) diameter

**THIN-CEILING-P**

Speaker Type: in-ceiling, 2-way
Woofers: 5" Injected polypropylene
Tweeter: 1" silk soft dome
Power: 75 watts
Impedance: 8 Ω
Freq Response: 65 - 20k Hz (+/-3 dB)
Sensitivity: 90 dB
Grill Type: Ghost style, frameless
Finish Dims: 6.8" (173mm) diameter
 2.4" (61mm) deep
Cutout Dims: 5.8" (147mm) diameter

**IWP-6**

Speaker Type: In-wall, 2 way
Woofers: 6.5" Injected polypropylene
Tweeter: 1" silk soft dome, swivel
Power: 100 watts
Impedance: 8 Ω
Freq Response: 55 - 20k Hz (+/-3 dB)
Sensitivity: 90 dB

Grill Type: Micromesh, aluminum
Finish Dims: 12.1" (308mm) H, 8.8" (224mm) W,
 3" (76mm) D
Cutout Dims: 10.9" (277mm) H, 7.4" (188mm) W

Family:

**GPW-8**

Speaker Type: In-wall, 2 way
Woofers: 8" white polypropylene
Tweeter: 1" silk soft dome/Changable Waveguide
Power: 125 watts
Impedance: 8 Ω
Freq Response: 40 - 20kHz (+/-3 dB)
Sensitivity: 90dB
Grill Type: Tweeter & woofer +3, 0, -3
Finish Dims: Ghost Style, frameless
 14.6" (371mm) H, 10.4" (264mm) W,
 3.9" (99mm) D
Cutout Dims: 9.3" (236mm) H, 13.4" (340mm) W

**GPW-6**

Speaker Type: In-wall, 2 way
Woofers: 6.5" white polypropylene
Tweeter: 1" silk soft dome/Changable Waveguide
Power: 100 watts
Impedance: 8 Ω
Freq Response: 45 - 20kHz (+/-3 dB)
Sensitivity: 89dB
Grill Type: Tweeter & woofer +3, 0, -3
Finish Dims: Ghost Style, frameless
 12.9" (328mm) H, 9.1" (233mm) W,
 3.9" (99mm) D
Cutout Dims: 8" (203mm) H, 11.6" (295mm) W

**CS650FL**

Speaker Type: In-ceiling, 2 way
Woofers: 6.5" MetaPlex™ composite
Midrange: ---
Tweeter: 1" silk soft dome, swivel
Power: 100 watts
Impedance: 8 Ω
Freq Response: 42 - 20k Hz (+/-3 dB)
Sensitivity: 90 dB
Grill Type: FastLoc™, frameless
Finish Dims: 9.75" (247mm) diameter
 3.9" (98mm) deep
Cutout Dims: 8.25" (210mm) diameter

Family:

**BCS80FL**

Speaker Type: In-ceiling, 2 way
Woofers: 8" talc filled polypropylene
Midrange: ---
Tweeter: 0.5" polycarbonate
Power: 60 watts
Impedance: 8 Ω
Freq Response: 50 - 19.5k Hz (+/-3 dB)
Sensitivity: 88.5 dB
Grill Type: FastLoc™, frameless
Finish Dims: 11.8" (300mm) diameter
 3.4" (86mm) deep
Cutout Dims: 9.75" (247mm) diameter

**BCS65FL**

Speaker Type: In-ceiling, 2 way
Woofers: 6.5" talc filled polypropylene
Midrange: ---
Tweeter: 0.5" polycarbonate
Power: 55 watts
Impedance: 8 Ω
Freq Response: 58 - 19.5k Hz (+/-3 dB)
Sensitivity: 87 dB
Grill Type: FastLoc™, frameless
Finish Dims: 9.75" (247mm) diameter
 2.8" (68mm) deep
Cutout Dims: 8.25" (210mm) diameter

**BCS65**

Speaker Type: In-ceiling, 2 way
Woofers: 6.5" talc filled polypropylene
Midrange: ---
Tweeter: 0.5" polycarbonate
Power: 55 watts
Impedance: 8 Ω
Freq Response: 58 - 19.5k Hz (+/-3 dB)
Sensitivity: 87 dB
Grill Type: Pressure fit, aluminum
Finish Dims: 9.68" (246mm) diameter
 2.8" (68mm) deep
Cutout Dims: 8.25" (210mm) diameter

**BCS3SDMG**

Speaker Type: Thin in-ceiling, 3-way
Woofers: (3) 3" paper cone
Midrange: (1) 3" paper cone
Tweeter: 0.8" silk soft dome
Power: 50 watts
Impedance: 8 Ω
Freq Response: 95 - 20k Hz (+/-3 dB)
Sensitivity: 89 dB
Grill Type: Ghost style, frameless
Finish Dims: 10.7" (272mm) diameter
 1.9" (50mm) deep
Cutout Dims: 9.5" (242mm) diameter





IMAGE COURTESY OF SUMMIT SECURITY

CUSTOM LENGTH SOUNDBARS



Type: Low profile custom length LCR, LR or CC soundbar
Woofer: (3) 4.5" carbon fiber
Tweeter: (3) 1" titanium
Passive Radiator: (3) 4.5" carbon fiber
Power: 125 watts (per ch) RMS
Impedance: 8 Ω
Freq Response: 90Hz - 22kHz (+/-3 dB)
Sensitivity: 89 dB
Grill Type: Cloth/aluminum black (silver optional)
Soundbar Width: 62" to 82"
Dimensions: 6.1" (155mm) H, 2.4" (61mm) D, 62" (1575mm) to 82" (2083mm) Custom cut length
Family:  GRAND CANYON

SB-CUSTOM-SC
 Low profile custom length LCR, LR or CC soundbar
 (3) 4.5" carbon fiber
 (3) 1" titanium
 (3) 4.5" carbon fiber
 125 watts (per ch) RMS
 8 Ω
 90Hz - 22kHz (+/-3 dB)
 89 dB
 Cloth/aluminum black (silver optional)
 41.5" to 62"
 6.1" (155mm) H, 2.4" (61mm) D, 41.5" (1054mm) to 62" (1575mm) Custom cut length
Family:  GRAND CANYON

SB-CUSTOM-LP
 Low profile custom length LCR, LR or CC soundbar
 (3) 4.5" injected polypropylene
 (3) 1" silk soft dome
 (3) 4.5" injected polypropylene
 100 watts (per ch) RMS
 8 Ω
 110Hz - 20kHz (+/-3 dB)
 88 dB
 Cloth/aluminum black (silver optional)
 62" to 82"
 6.1" (155mm) H, 2.4" (61mm) D, 62" (1575mm) to 82" (2083mm) Custom cut length
Family:  POWELL

SB-CUSTOM-SP
 Low profile custom length LCR, LR or CC soundbar
 (3) 4.5" injected polypropylene
 (3) 1" silk soft dome
 (3) 4.5" injected polypropylene
 100 watts (per ch) RMS
 8 Ω
 110 Hz - 20kHz (+/-3 dB)
 88 dB
 Cloth/aluminum black (silver optional)
 41.5" to 62"
 6.1" (155mm) H, 2.4" (61mm) D, 41.5" (1054mm) to 62" (1575mm) Custom cut length
Family:  POWELL



**CUSTOM LENGTH
TO MATCH ANY SCREEN**



 PATENT PENDING

Front Wire Pass-Through



SB-CUSTOM-TVB

Flatscreen Mounting Bracket
Mount any Custom Length
Soundbar to any flatscreen TV

CUSTOM POWERED SOUNDBAR



Optional wireless subwoofer receiver.
Seamlessly pair any TruAudio subwoofer
to the Custom Powered Soundbar.

SB-CPSB-C

Type: Low profile custom length
powered soundbar

Woofers: (2) 4.5" carbon fiber

Tweeters: (2) 1" titanium

Passive Radiator: (2) 4.5" carbon fiber

Power: 110-240V, 50-60Hz

Impedance: 8 Ω

Freq Response: 70Hz - 22kHz (+/-3 dB)

Speaker Output: Internal amplifier, 2x30W

Inputs: Toslink (optical), Bluetooth,
AUX 3.5mm analog

Bluetooth Version: v.4.2

Grill Type: Cloth/aluminum black (silver optional)

Soundbar Height: 6.1" (155mm)

Soundbar Depth: 2.4" (61mm) D,

Soundbar Width: 42.9"-57.9" (1090-1473mm) or

61.0-68" (1549-1727mm)

Family:



SB-CPSB-P

Type: Low profile custom length
powered soundbar

Woofers: (2) 4.5" polypropylene

Tweeters: (2) 1" silk dome

Passive Radiator: (2) 4.5" polypropylene

Power: 110-240V, 50-60Hz

Impedance: 8 Ω

Freq Response: 70Hz - 22kHz (+/-3 dB)

Speaker Output: Internal amplifier, 2x30W

Inputs: Toslink (optical), Bluetooth,
AUX 3.5mm analog

Bluetooth Version: v.4.2

Grill Type: Cloth/aluminum black (silver optional)

Soundbar Height: 6.1" (155mm)

Soundbar Depth: 2.4" (61mm) D,

Soundbar Width: 42.9"-57.9" (1090-1473mm) or

61.0-68" (1549-1727mm)

Family:



**Analog & Digital Inputs | Bluetooth
IR Learn | Remote Control
Built-in Wireless Sub Transmitter**



SB-SLIM-44P

Type: Low profile, LCR soundbar

Woofers: (3) 4.5" injected polypropylene

Tweeters: (3) 1" silk soft dome

Passive Radiator: (3) 4.5" injected polypropylene

Power: 100 watts (per ch) RMS

Impedance: 8 Ω

Freq Response: 110 Hz - 20kHz (+/-3 dB)

Sensitivity: 88 dB

Grill Type: Cloth/aluminum black (silver optional)

Dimensions: 6.1" (155mm) H, 2.4" (61mm) D,
44" (1118mm) W

Family:



Ships Same Day



Front Wire Pass-Through



SB-CUSTOM-TV

Flatscreen Mounting Bracket
Mount any Custom Length
Soundbar to any flatscreen TV



AS-3

Speaker Type: Landscape outdoor, 2-way
Woofers: 8" molded polypropylene
Tweeter: 1" Silk soft dome
Power: 64 watts
Impedance: 8 Ω or 70V/100V
70v Taps: 4, 8, 16, 32, 64W
100v Taps: 8-64W selectable
Freq Response: 40 - 20k Hz (+/- 3dB)
Sensitivity: 88 dB
Grill Type: Aluminum mesh
Mounting: Ground stake, (Optional wall base)
Finish Dims: 10" (254mm) L, 8.5" (216mm) Diameter

Family:



UNIVERSAL



AS-2

Speaker Type: Landscape outdoor, 2-way
Woofers: 6.5" molded polypropylene
Tweeter: 1" Silk soft dome
Power: 50 watts
Impedance: 8 Ω or 70V/100V
3, 6, 13, 25, 50W
6W - 50W selectable
Freq Response: 60 - 20k Hz (+/- 3dB)
Sensitivity: 88 dB
Grill Type: Aluminum mesh
Mounting: Ground stake, (Optional wall base)
Finish Dims: 9.4" (239mm) L, 7.7" (196mm) Diameter



UNIVERSAL



AS-1

Speaker Type: Landscape outdoor, 2-way
Woofers: 4.5" molded polypropylene
Tweeter: 0.75" silk soft dome
Power: 30 watts
Impedance: 8 Ω or 70V/100V
2, 4, 8, 15, 30W
6W - 30W selectable
Freq Response: 80 - 20k Hz (+/- 3dB)
Sensitivity: 85 dB
Grill Type: Aluminum mesh
Mounting: Ground stake, (Optional wall base)
Finish Dims: 6.9" (175mm) L, 5.4" (137mm) Diameter



UNIVERSAL



AS-360

Speaker Type: Landscape outdoor, 2-way
Woofers: 6.5" molded polypropylene
Tweeter: (3) 1" silk soft dome
Power: 50 watts
Impedance: 8 Ω or 70V/100V
3, 6, 13, 25, 50W
Freq Response: 60 - 20k Hz (+/- 3dB)
Sensitivity: 88 dB
Grill Type: Aluminum mesh
Mounting: Ground/Wall mount and stake included
Finish Dims: 8.3" (211mm) Diameter, 9.5" (241mm) H



UNIVERSAL



ULTRASCAPE-PRO
Includes:

- (1) 10" Burial subwoofer
- (4) 4" Satellite speakers



ULTRAPRO+
Includes:

- (1) 10" Burial subwoofer
- (6) 4" Satellite speakers



ULTRASCAPE-PRO+
EXPANSION SYSTEM (Can only be added to ULTRASCAPE-PRO System)
Includes:

- (2) Satellite Speakers



ULTRASCAPE-PRO-T100-A.1x
Includes:

- (1) ULTRASCAPE-PRO
- (1) T100
- (1) VSSL A.1x



ULTRASCAPE-PRO-T100
Includes:

- (1) ULTRASCAPE-PRO
- (1) T100

Speaker Type: Underground subwoofer
Woofers: 10" dual voice coil high-density polypropylene

Impedance: 11 Ω +11 Ω
Freq Response: 45 - 200 Hz (+/- 3 dB)
Sensitivity: 89 dB 1w/1m
Input: 2 channel audio signal in
Output: 2 channel signal out
Enclosure: Fiberglass reinforced plastic
Dimensions: 12.68" x 16.54"

Family:



UNIVERSAL



Subwoofer

Speaker Type: 2-way outdoor landscape speaker
Woofers: 4" high-density polypropylene
Tweeter: 0.75" all-weather PEI
Impedance: 16 Ω
Freq Response: 70 - 21K Hz (+/- 3 dB)
Sensitivity: 88 dB @ 1w/1m
Grill Type: Aluminum
Dimensions: Diameter: 5", Length: 7", Height: 7.7" Height with stake 11"

Family:



UNIVERSAL



Satellite Speaker



IP66



IP66



IP66

ST-12PRO

Speaker Type: Underground Subwoofer
Woofer: 12" injected polypropylene
Power: 400 watts
Impedance: 4 Ω or 70V
70v Taps: 200W
Freq Response: 30 - 120 Hz (+/- 3dB)
Sensitivity: 89 dB
Colors: Green
Finish Dims: 17.22" (437mm) L, 17.22" (437mm) W, 19.87" (505mm) H w/port

Family:



ST-10PRO

Speaker Type: Underground Subwoofer
Woofer: 10" injected polypropylene
Power: 250 watts
Impedance: 4 Ω

Freq Response: 40 - 85 Hz (+/- 3dB)
Sensitivity: 88 dB
Colors: Yellow
Finish Dims: 15.2" (386mm) L, 15.2" (386mm) W, 19.87" (505mm) H w/port



HS-SUB-12BR/TN

Speaker Type: Outdoor subwoofer
Woofer: 12" polypropylene
Power: 350 watts
Impedance: 4 Ω/70v
70v Taps: 200 watts
Freq Response: 36 - 150 Hz
Sensitivity: 90dB
Colors: Brown or Tan
Finish Dims: 16.5" (419mm) H, 15.6" (396mm) W, 15.6" (396mm) D



**SubTerrain PRO /
Hardscape Sub**

PREFERRED PACKAGES





SUBT12-PAKLEA-AS2-8



SUBT-PAKLEA-AS2-6

FREE SYSTEM DESIGN SERVICES

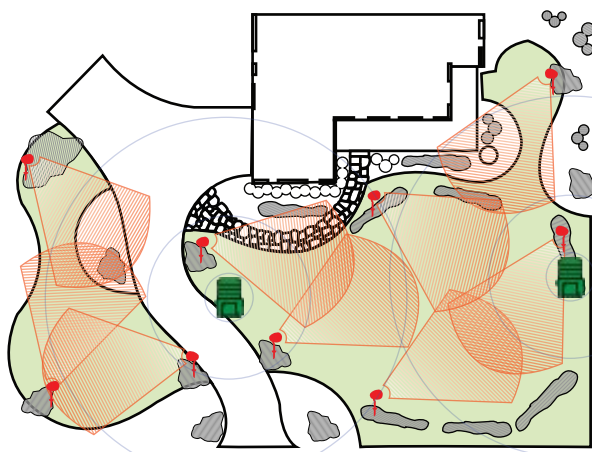

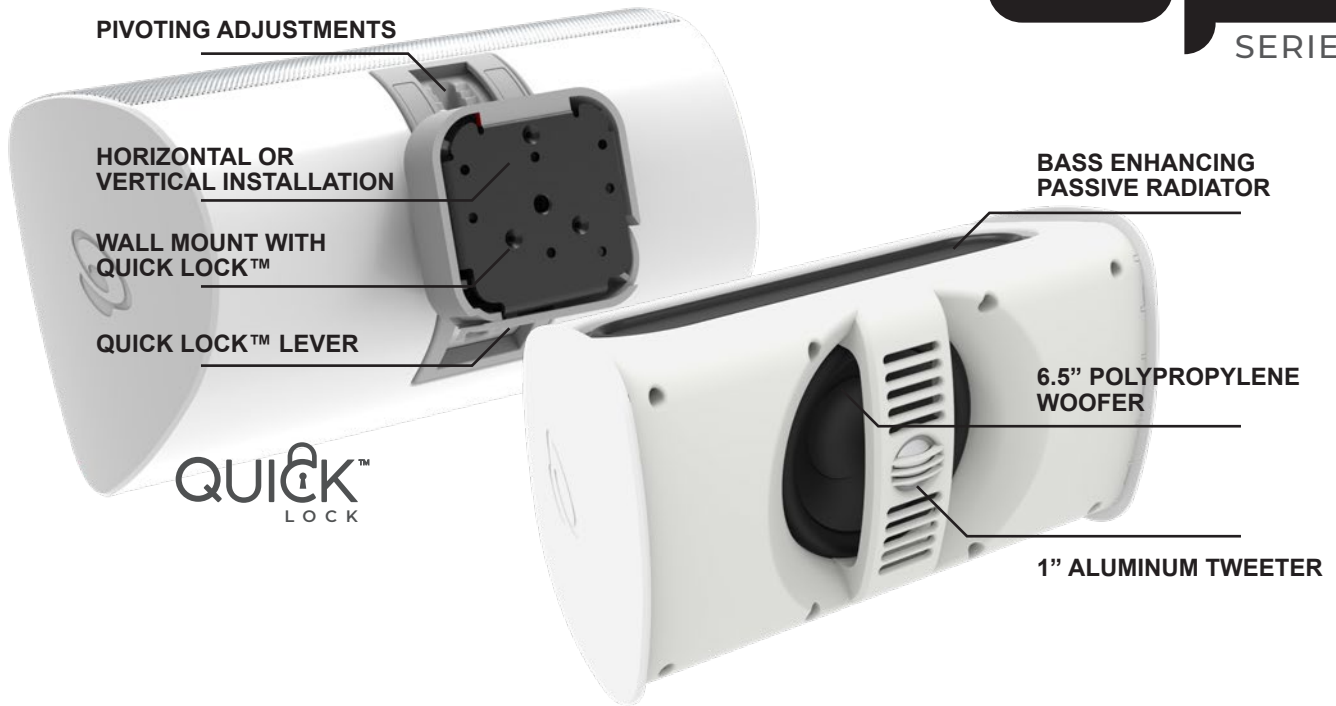

Speaker Type: Outdoor, 2-way
Woofers: 6.5" polypropylene
Passive Radiator: Bass enhancing radiator
Tweeter: 1" aluminum
Power: 25-150W
Impedance: 8Ω
Frequency Response: 65-20kHz
Sensitivity: 89dB
Grill Type: Aluminum microperforated
Speaker Wire Connector: Quick Lock™ technology
Finish Dimensions:

OP6-WT | OP6-BK

Outdoor, 2-way
 6.5" polypropylene
 Bass enhancing radiator
 1" aluminum
 25-150W
 8Ω
 65-20kHz
 89dB
 Aluminum microperforated
 Quick Lock™ technology
 W:14.5" (368mm)
 H: 8.3" (211mm)
 D: 8.9" (226mm)



Rock Series / OL Series



RK-8 GY/TN

Speaker Type: Outdoor, 2 way rock speaker
Woofers: 8" polypropylene
Tweeter: 1" titanium
Power: 150 watts
Impedance: 8 Ω
Freq Response: 40 - 20k Hz (+/- 3dB)
Sensitivity: 90 dB
Grill Type: Rock-shaped micromesh
Colors Available: Gray, tan
Cabinet Size: 11.8" (300mm) H
 15" (381mm) W
 12.3" (312mm) D

Family:



OL-5 WT/BK

Speaker Type: Outdoor, 2 way
Woofers: 5.25" polypropylene
Tweeter: 0.75" titanium
Power: 80 watts
Impedance: 8 Ω
Freq Response: 60 - 20k Hz (+/- 3dB)
Sensitivity: 89 dB
Grill Type: Aluminum mesh
Colors Available: Black, white
Cabinet Size: 10.3" (262mm) H
 7.3" (185mm) W
 6.5" (165mm) D



Outdoor Demo Kit



Includes:

- (1) LEA-CONNECT-352
- (4) AS-2
- (1) ST-10PRO
- (1) VSSL A.1x
- (2) Heavy Duty Pelican Cases
- Custom Cut Foam
- Pre-Wired

[UltraScape PRO demo kit also available.]

Outdoor Enclosure

Features:

- Safely store electronics outside
- Built-in fan or air conditioning units available
- Aluminum mounting plate with 120 Vac outlets
- NEMA Type 4, 4X / IP56 rated, fully gasketed lid
- 2 sizes

HW2-N14-1F

14"x12"x7"
Built-in fan

HW2-N30-R1F

30"x24"x11"
Built-in fan
5U rack mount

HW2-N30-R1AC

30"x24"x11"
300W DC powered A/C
5U Rack mount

OEB

Mounting bracket for a T100 and
VSSL A.1x



Dummy Speakers Volume Controls



GHOST STYLE GRILL

R8G DUMMY

8" round dummy speaker
Blank speaker frame & frameless Ghost style grill
Grill includes thin layer of dacron
All TruAudio 7", 8", and 9" in-ceiling speakers
Includes NO drivers or crossover

Description:

Finish Dims:

Cutout Dims:

10.7" (272mm) diameter
4" (102mm) deep
9.8" (249mm) diameter



GHOST STYLE GRILL

R6G DUMMY

6.5" round dummy speaker
Blank speaker frame & frameless Ghost style grill
Grill includes thin layer of dacron
All TruAudio 6.5" in-ceiling speakers
Includes NO drivers or crossover

9.5" (241mm) diameter
3.1" (79mm) deep
8.1" (206mm) diameter



VCS-100-AIW

Slider type control
100 watt stereo volume control
Impedance matching
Décor style faceplate
Colors: white, almond, ivory

VCK-100-AIW

Rotary knob type control
100 watt stereo volume control
Impedance matching
Décor style faceplate
Colors: white, almond, ivory



VCK-70v-100AIW

Rotary knob type control
volume control with 25W-100W max speaker load at 70v
Décor style faceplate
Colors: white, almond, ivory

**BD-8 WT/BK**

Speaker Type: Pendant, 2-way
Woofers: 8" molded polypropylene
Tweeter: 1" silk soft dome
Power: 125 watts
Impedance: 8 Ω or 70V/100V
70v Taps: 4, 8, 15, 30, 60W
100v Taps: 8, 15, 30, 60W
Freq Response: 42 - 20k Hz (+0/-3 dB)
Sensitivity: 90 dB
Grill Type: Aluminum mesh
Colors Available: Black, white
Mounting: Gripple with cable
Finish Dims: Height: 12.6" (320mm)
 Width: 12.3" (312mm)
 Depth: 17" (432mm)

Family:



UNIVERSAL

**OL-70v-6BK/WT**

Outdoor 70v
 6.5" polypropylene
 1" silk
 30 watts
 70v/100v
 2, 4, 8, 15, 30W
 4, 8, 15, 30W
 60 - 20k Hz (+/-3 dB)
 86 dB
 Aluminum mesh
 Black, White
 U bracket
 11.9" (303mm) diameter
 8.5" (215mm) deep
 7.5" (191mm) diameter



UNIVERSAL

Back Box
Included**CL-70v-6**

Speaker Type: In-Ceiling 70v 2-way
Woofers: 6.5" polypropylene
Tweeter: 0.75" PEI
Power: 60 watts
Impedance: 8 Ω or 70v/100v
70v Taps: 2.5, 5, 10, 15, 25W
100v Taps: 5, 10, 15, 25W
Freq Response: 60 - 20k Hz (+/-3 dB)
Sensitivity: 88 dB
Grill Type: Aluminum mesh
Colors Available: White
Mounting: ---
Finish Dims: 9.5" (241mm) diameter
 5.9" (150mm) deep

Cutout Dims: 8.3" (211mm) diameter
Family:



UNIVERSAL

Now with
Ghost Style GrillMetal Back Box
Included**CL-70v-6UL**

In-Ceiling 70v 2-way
 6.5" polypropylene
 0.75" PEI
 60 watts
 8 Ω or 70v/100v
 2.5, 5, 10, 15, 25W
 5, 10, 15, 25W
 60 - 20k Hz (+/-3 dB)
 88 dB
 Ghost style, frameless
 White

10.4" (264mm) diameter
 9" (229mm) deep

8.8" (224mm) diameter



UNIVERSAL





PERFECTLY INVISIBLE



WR₂₄ SPEAKER

Power: 50W
Impedance: 4Ω (2 @ 8Ω)
Freq. Range: 70 Hz - 18kHz
Dispersion: 180° x 180°
Max SPL: 105 db 1 w/1 m
Dimensions: 24.38" (619mm) x 15.75" (400mm) x 2.2" (56mm)

Can be configured as a Dual Voice Coil speaker

Family:



UNIVERSAL

WR₄₀ SUBWOOFER

Power: 150W Max
Impedance: 4Ω
Freq. Range: 35 - 150 Hz
Dispersion: 180° x 180°
Max SPL: 108 db 1 w/1 m
Dimensions: 39.25" (997mm) x 15.75" (400mm) x 2.2" (56mm)

Sold exclusively with TRU-S500DSP



UNIVERSAL




PROTECTION UNIT WRPRO

Included with every loudspeaker is a passive limiter and crossover that can be installed at the rack or equipment closet.

Optional SPACE SAVER WR24SS | WR40SS

Reusable space savers, designed to act as a rough-in ring for new builds. Attach directly to the studs and cut drywall around the space. Available for both WR24 speaker and WR40 subwoofer.

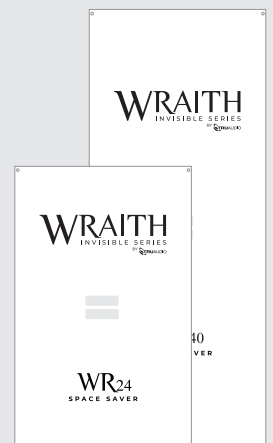



16 CHANNEL AMPLIFIER 8 SUBWOOFER OUTPUTS



FEATURES

- 8 SUBWOOFER RCA OUTPUTS PAIRS SEAMLESSLY WITH IC-SUB-8
- GAIN KNOB PER ZONE
- LINE IN PER ZONE
- STEREO/BRIDGE SWITCH PER PAIR
- SPEAKER LEVEL SUBWOOFER OUT WITH ADJUSTABLE SUBWOOFER CROSSOVER



QUICK CONNECT
COMPATIBLE

D16

Channels: 16 channels, 8 zones Class D Amplifier
Subwoofer Outputs: 8 RCA outputs
Subwoofer Crossover: 40-140Hz
Power Output, Continuous: 75 watts/ch @ 8 Ω all channels driven
150 watts/ch @ 4 Ω
Bridged Power Output: 150 watts/ch @ 8 Ω
Power Requirements: AC 100-120V 60Hz / AC220-240V 50Hz
Inputs: Manual Switching
A&B Bus in and out,
4-8 Ω
Impedance: 4-8 Ω
Dimensions: 4.2" (105mm)H,
16.8" (427mm)W,
13.5" (343mm) D (w/RCA ports)
Weight: 35.15 lbs
Rack Mount: Includes rack ears, 2U
Certifications: CE, CB, NRT, FCC, CE-EMC, ERP

Family: UNIVERSAL

IC-SUB-8

Speaker Type: In-Ceiling Subwoofer
Driver: 8" Polypropylene
Power: 75-150W
Impedance: 8 Ω
Frequency Response: 38-140Hz
Max dB Output: 98
Grill Type: Ghost style, frameless
Tweeter: None
Weight: 6.7 lbs
Depth: 7.9" (201 mm)
Cut Out Diameter: 9.4" (238 mm)
Finish Diameter: 10.6" (269 mm)

Family: UNIVERSAL



AMP-3512

Channels: 12 channels, 6 zones
Power Output, Continuous: 35 watts/ch @ 8 Ω
 70 watts/ch @ 8 Ω
Bridged Power Output: 115v/230v
Power Requirements: 2-Global Ins (BUS), 2-Global Outs (BUS),
Inputs: 6-Local Inputs
 4-8 Ω
Impedance: 3.9"(99mm)H,
Dimensions: 16.4"(417mm)W,
 14.5"(368mm) D
 27.5 lbs
Weight: Includes rack ears, 2U
 ETL, CE (or CB scheme)
Certifications:



UNIVERSAL




TRU-S500DSP

Channels: Mono channel sub amplifier
Subwoofer Presets: Trident, Trunami, SubTerrain Series,
 BP-SUB-12, HS-SUB-12
Power Output, Continuous: 250 watts (RMS @ 8ohms)
 500 watts/ch @ 4 ohms
Bridged Power Output: ---
Power Requirements: 115v / 230v
Impedance: 4-8 Ω
Dimensions: 1.8" (46mm) H
 19" (483mm) W
 10.4" (264mm) D
Weight: 16 lbs.
 Includes rack ears, 1U
Certifications: EU, CE, ETL, RCM



UNIVERSAL

Amplifiers




T100

Channels: 2 Channels
Power Output, Continuous: ---
 100 watts/ch @ 8 ohms
 150 watts/ch @ 4 ohms
Bridged Power Output: 275 watts @ 8 ohms
Power Requirements: 120v / 240v
Inputs: 4 - 8 Ω
Impedance: 1.75" (44mm) H
Dimensions: 7.8" (200mm) W
 10.3 (260mm)
 4.5 lbs.
Weight: CE, FCC
Certifications:



UNIVERSAL




T50

Channels: 2 channels
Power Output, Continuous: ---
 50 watts/ch @ 8 ohms
 60 watts/ch @ 4 ohms
 100W @ 8 ohm / 60W @ 4 ohm
Power Requirements: 120V - 240V @ 50Hz - 60Hz A/C
Inputs: 4 - 8 Ω
Impedance: 1.75" (44.5mm) H
Dimensions: 6.5" (132mm)W
 5.2" (132mm) D
 2.25 lbs
Weight: CE, FCC
Certifications:



UNIVERSAL

Amplifiers

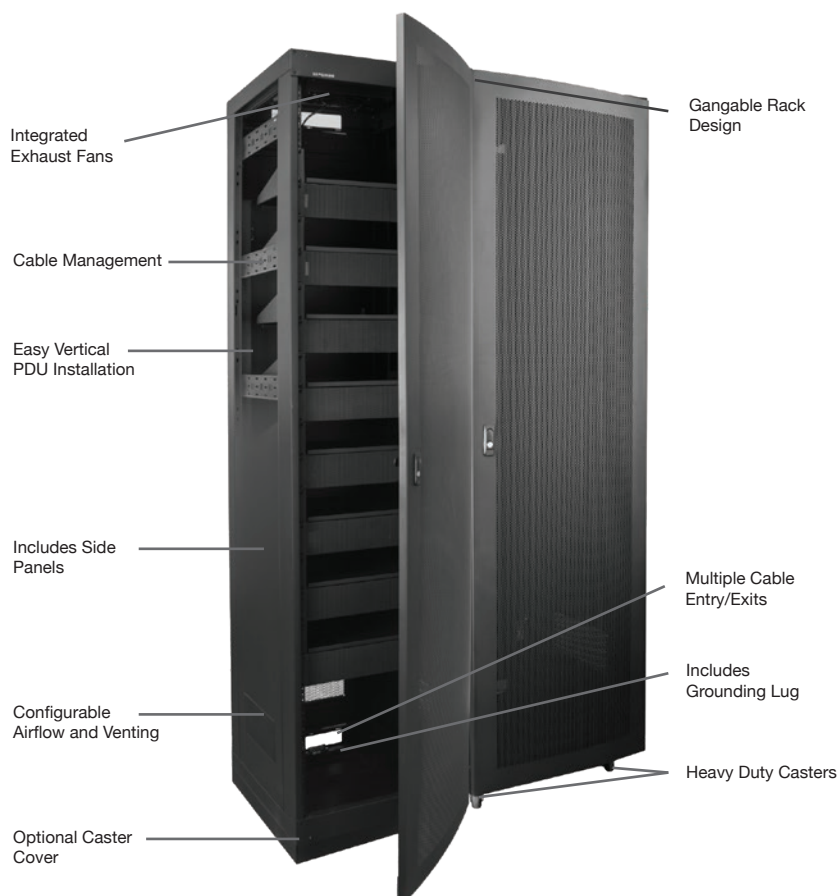

VAULT SERIES

The Vault Series has many features to better assist installers and end-users alike. It was designed with an integrated cooling unit at the top of the rack, a 1,000 lb. weight limit providing the ability to include all equipment within the rack, plenty of punch-outs and space for power supplies, and the best wire management system TruAudio has ever produced. All of this comes at a competitive price point, making Vault versatile, economical, and perfect for your next install.

RVS-16-PAK

Vault Series Bundle - 16U

1x Rack Frame - 16U	RVS-16U
2x 2U Shelves	R-SHELF-2UC
2x 2U Vented Panels	R-VENTP-2U
1x Rack Screws - 100 pcs.	R-SCRWS-B100

RVS-20-PAK

Vault Series Bundle - 20U

1x Rack Frame - 20U	RVS-20U
3x 2U Shelves	R-SHELF-2UC
3x 2U Vented Panels	R-VENTP-2U
1x Rack Screws - 100 pcs.	R-SCRWS-B100

RVS-28-PAK

Vault Series Bundle - 28U

1x Rack Frame - 28U	RVS-28U
5x 2U Shelves	R-SHELF-2UC
5x 2U Vented Panels	R-VENTP-2U
1x Rack Screws - 100 pcs.	R-SCRWS-B100

RVS-36-PAK

Vault Series Bundle - 36U

1x Rack Frame - 36U	RVS-36U
6x 2U Shelves	R-SHELF-2UC
6x 2U Vented Panels	R-VENTP-2U
1x Rack Screws - 100 pcs.	R-SCRWS-B100

RVS-44-PAK

Vault Series Bundle - 44U

1x Rack Frame - 44U	RVS-44U
8x 2U Shelves	R-SHELF-2UC
8x 2U Vented Panels	R-VENTP-2U
1x Rack Screws - 100 pcs.	R-SCRWS-B100

COMPLETE FRAMES

Frame includes top, bottom (with casters), side, and rear panels, front door, fans and cable management

RVS-16	16U Vault Series Rack Frame
RVS-20	20U Vault Series Rack Frame
RVS-28	28U Vault Series Rack Frame
RVS-36	36U Vault Series Rack Frame
RVS-44	44U Vault Series Rack Frame

COMPONENTS

RVS-TOP/BOT	Top and Bottom Panels (includes casters)
RVS-FR/L-16U	Right and Left Frames with Rails and Side Panels - 16U
RVS-FR/L-20U	Right and Left Frames with Rails and Side Panels - 20U
RVS-FR/L-28U	Right and Left Frames with Rails and Side Panels - 28U
RVS-FR/L-36U	Right and Left Frames with Rails and Side Panels - 36U
RVS-FR/L-44U	Right and Left Frames with Rails and Side Panels - 44U
RVS-F/RDOOR-16U	Front Door and Rear Panel - 16U
RVS-F/RDOOR-20U	Front Door and Rear Panel - 20U
RVS-F/RDOOR-28U	Front Door and Rear Panel - 28U
RVS-F/RDOOR-36U	Front Door and Rear Panel - 36U
RVS-F/RDOOR-44U	Front Door and Rear Panel - 44U

ACCESSORIES

RVS-CASTERCVR	Vault Series Magnetic Caster Cover
RVS-JOIN	Vault Series Gangable Kit
R-PDU-MOUNT	Vertical PDU Mount Brackets