NEOCAN

NEOCAN

SINGLE EDGE ALUMINUM

EASY TO ASSEMBLING

SINGLE EDGE ALUMINUM STRIPS IS A POPULAR MATERIAL WHICH IS USING MANY COUNTRIES; THE FODED EDGE MAKE IT EASY TO INSTALL THE ACRYLIC SHEETS AND HAVING NO HIGHT SIZE RESTRICTIONS IS ONE THE BENEFITS OF THIS PRODUCT; THIS MATERIALS IS AVAILABLE IN RECTANGLE AND TRIANGLE EDGE SECTION TYPE.

Four guarantees

Factory direct delivery

Complete stock

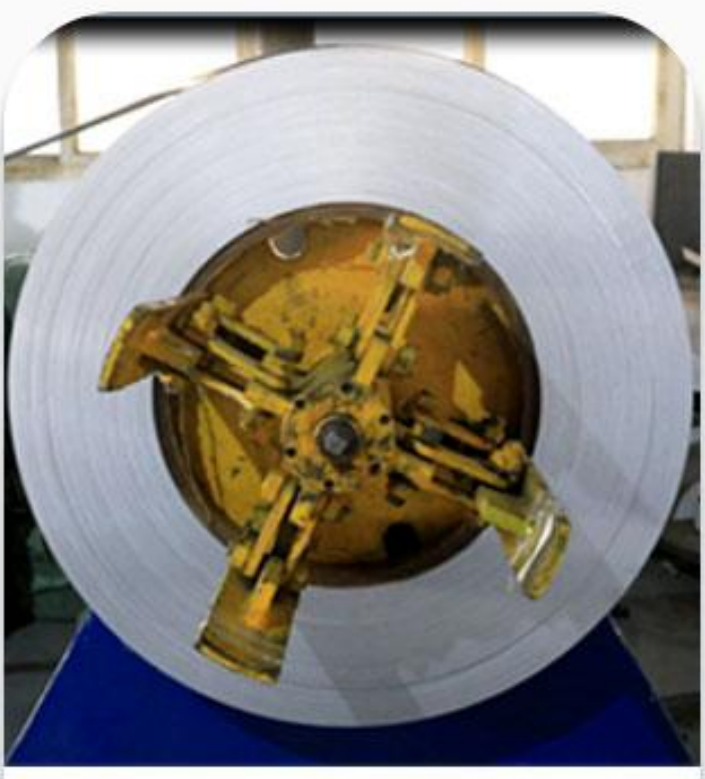

Custom specifications

Professional team

SINGLE EDGE ALUMINUM

Precise measurement

ACTUAL SIZE IN LENGTH,WIDTHAND THICKNESS,
DO NOT DECEIVE CONSUMERS

VARIOUS SIZES AVAILABLE

EVERY DETAILTHEY ARE ALL SINCERE WORKS

PRODUCT DETAILS

Top Edge PVC

Using rigid PVC film that increases the adhesion of acrylic to the body of the material that causes a stronger and more durable final product.

Folded Edge

The folded edge make it easy to install the acrylic sheets and having no height size restrictions, this materials is available in rectangle and triangle edge section type.

Strong color coating

Our color coated aluminum coils are mainly poly-ester coating and fluorocarbon coating, with a thickness more than24 micron on surface andmore than 18 micron on backside.

EVERY DETAILTHEY ARE ALL SINCERE WORKS

Product information

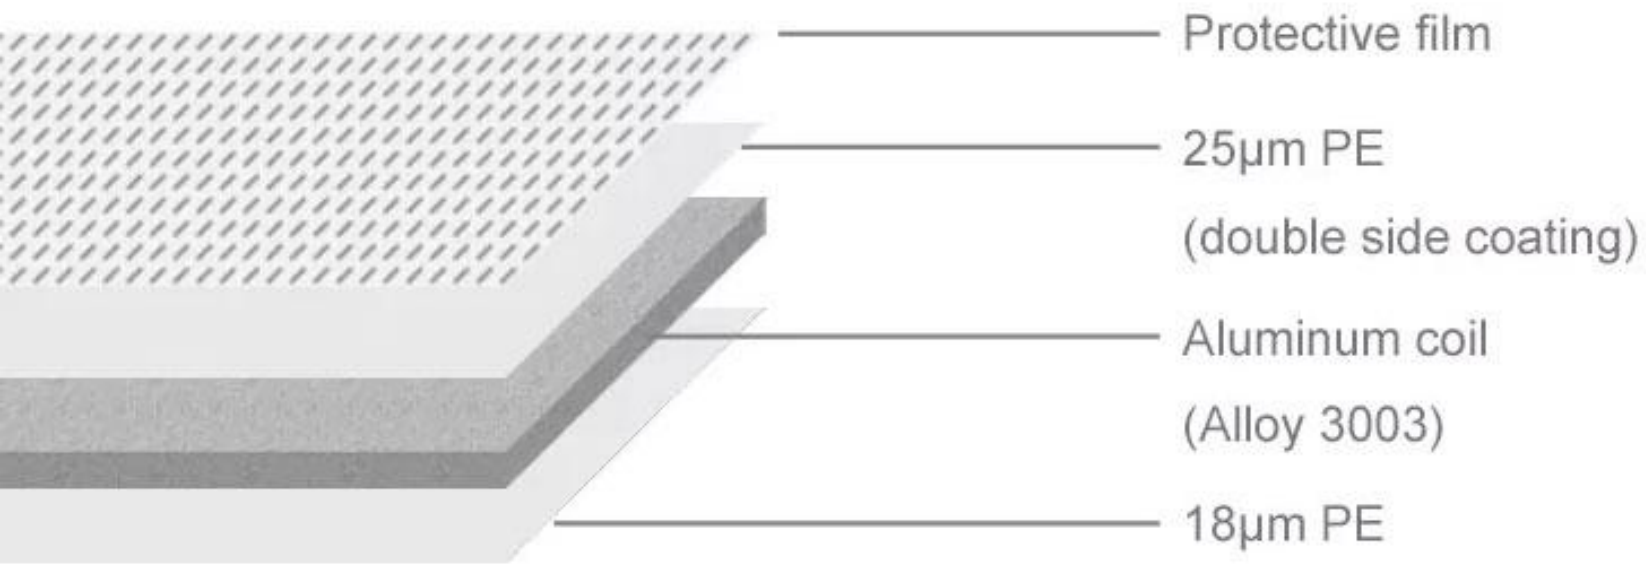
Protective film
25μm PE
(double side coating)
Aluminum coil
(Alloy 3003)
18μm PE

Parameters that

Product name:	Single edge aluminum
Width:	6cm,8cm,10cm
Thickness:	0.5mm,0.6mm
Length:	50m

Colour: White / Black / Red / Green / Blue / Yellow / Silver Gold
Mirror Silver / Mirror gold / Brushed Silver
Brushed Gold / Brushed rose gold

STRONG COLOR COATING

Color display

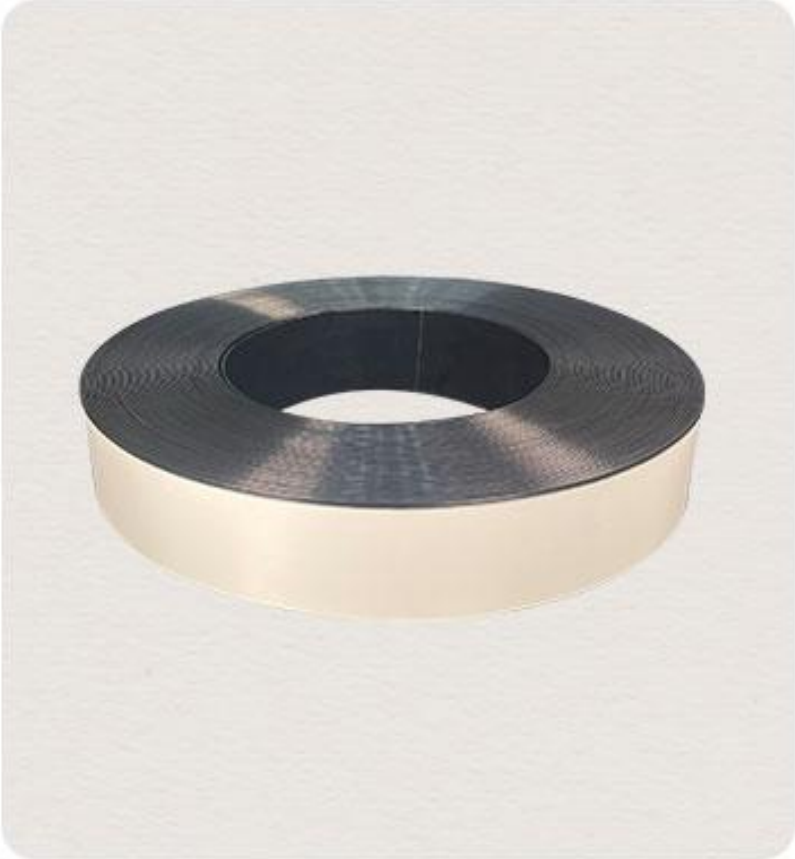

EVERY DETAILTHEY ARE ALL SINCERE WORKS

Product display

[Single edge aluminum]

How to bend?

BENDABLE MANUALLY OR BY MACHINE

HT1
BENDING MACHINE

1.Channelume materials are bendable by Automatic Bending machine

OR

2.Manual bending

Installation process

Inner support installation:


Double faced adhesive tape
Back of text

1. Stick double-sided adhesive tape on the lining plate on the back of the text

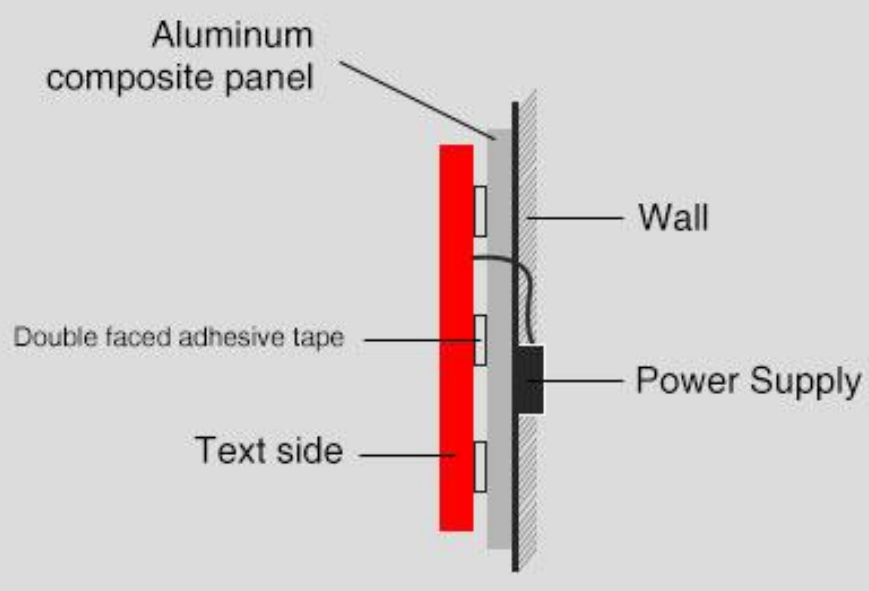
Aluminum composite panel
Wall
Double faced adhesive tape
Power Supply
Text side

2. Use double-sided tape to fix the text with aluminum-plastic plate

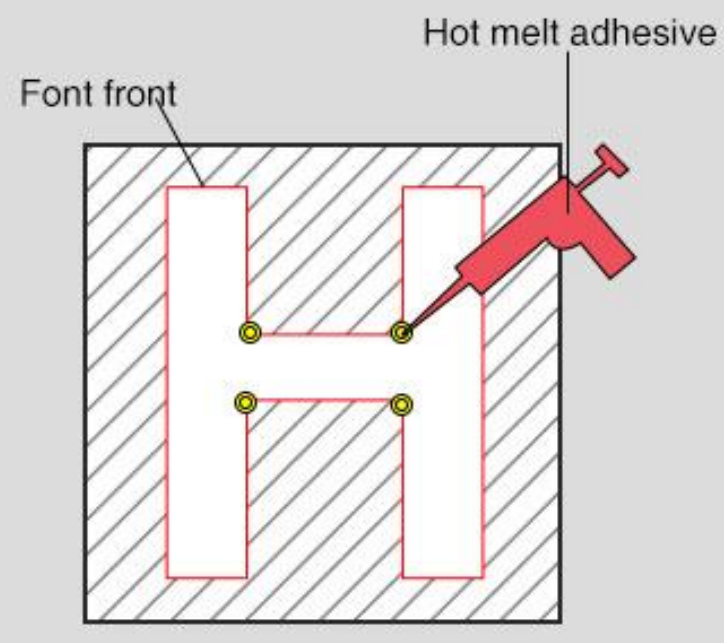
Hot melt adhesive
Font front

3. Stick double-sided adhesive tape on the lining plate on the back of the text

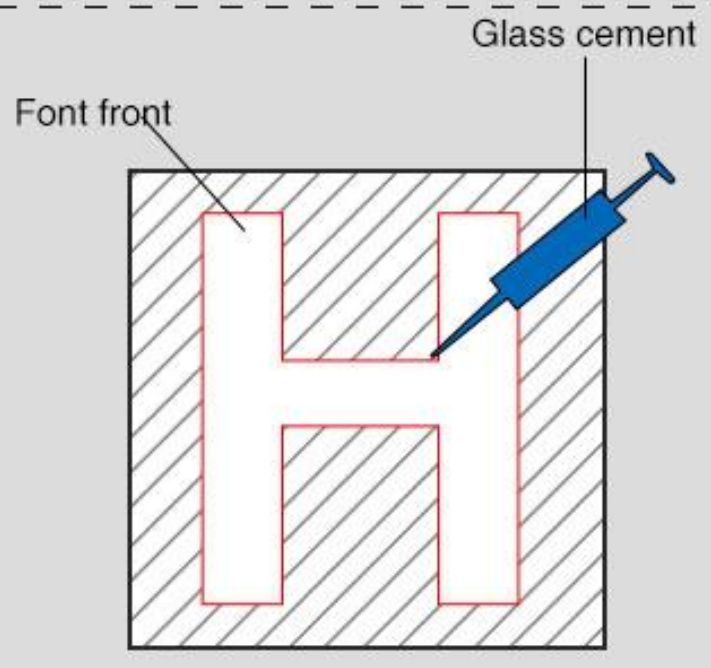
Glass cement
Font front

4. Use a glass glue gun to apply glass glue along the edge of the word

External foot installation


Aluminum composite panel
Wall
Percussion drill

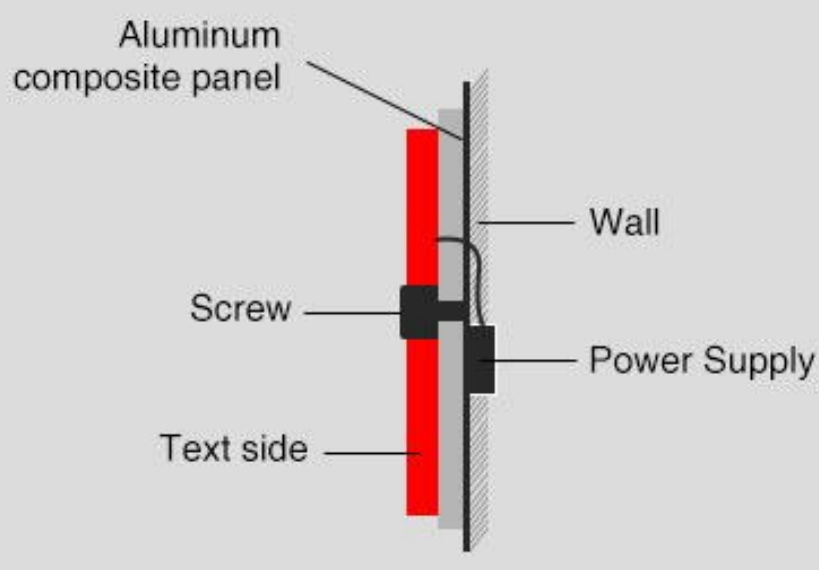
Aluminum composite panel
Wall
Screw
Power Supply
Text side