NEOCAN

CHANNEL LETTER WITH SPONGE AND PVC

Best Channel letter material solution | Double Side folded with pvc and sponge

Four guarantees

○○○

WHY CHOOSE NEOCAN

Factory direct delivery

Complete stock

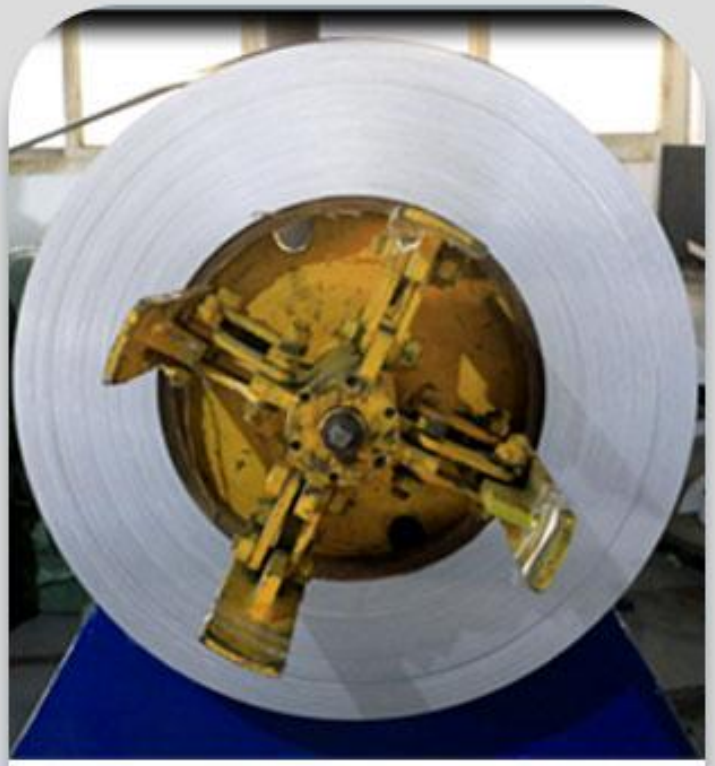

Custom specifications

Professional team

[channelume]

Precise measurement

VARIOUS SIZES AVAILABLE

ACTUAL SIZE IN LENGTH,WIDTHAND THICKNESS,
DO NOT DECEIVE CONSUMERS

Product details

○●○

EVERY DETAIL
THEY ARE ALL SINCERE WORKS

Suitable alloy

Using 1000 and 3000 series aluminum alloys which has high ductility and flexibility, high corrosion resistance and high durability

Top edge PVC

Using rigid PVC film that increases the adhesion of acrylic to the body of the material that causes a stronger and more durable final product.

Strong color coating

Our color coated aluminum coils are mainly poly-ester coating and fluorocarbon coating, with a thickness more than24 micron on surface andmore than 18 micron on backside.

[channelume]

Sponge Foam

PREVENT FROM DUST PENTERATION


25mm PVC
10mm foam
7mm
5mm

Product information

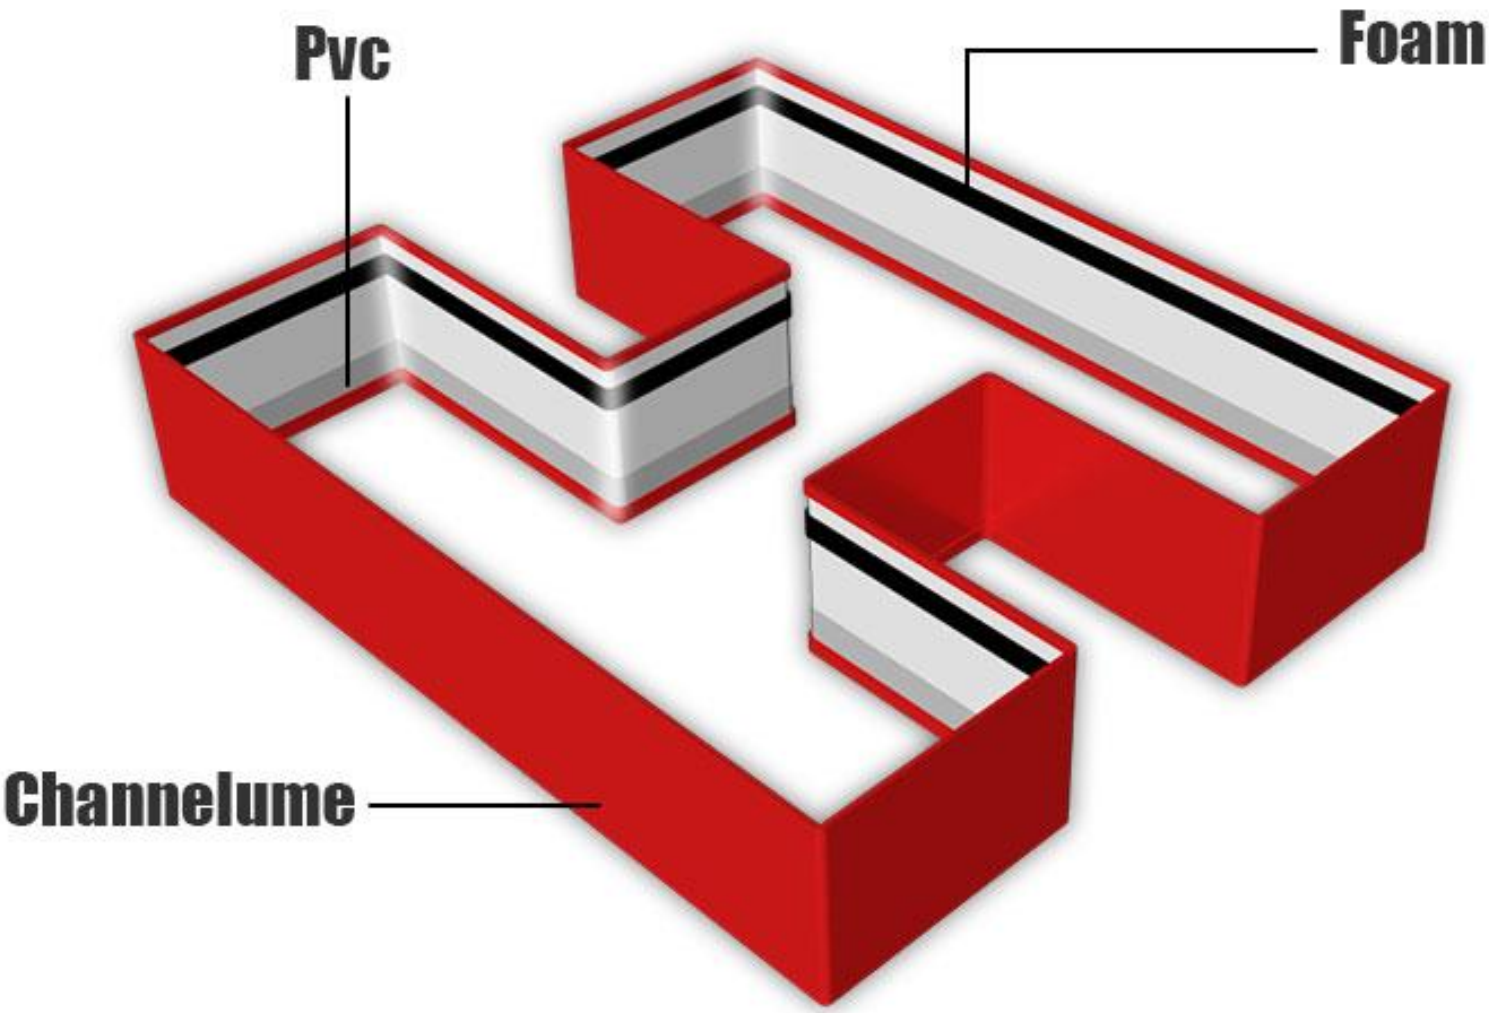
Pvc
Foam
Channelume

Parameters that

Product name:	Channelume
Width:	5cm,7cm,9cm,11cm
Thickness:	0.4mm,0.5mm
Length:	50m
Colour:	White / Black / Red / Green / Blue / Yellow / Silver Gold Mirror Silver / Mirror gold / Brushed Silver Brushed Gold / Brushed rose gold

Color display

STRONG COLOR COATING

Red

White



Black

Blue

Yellow

Gold

Sliver

Green

Apple Green

Product display

○ ● ○

EVERY DETAIL
THEY ARE ALL SINCERE WORKS

How to bend?

BENDABLE MANUALLY OR BY MACHINE

1.Channelume materials are bendable by Automatic Bending machine

HighTech
HT1
BENDING MACHINE

OR

2.Manual bending

Installation process

Inner support installation:


Double faced adhesive tape
Back of text

1. Stick double-sided adhesive tape on the lining plate on the back of the text

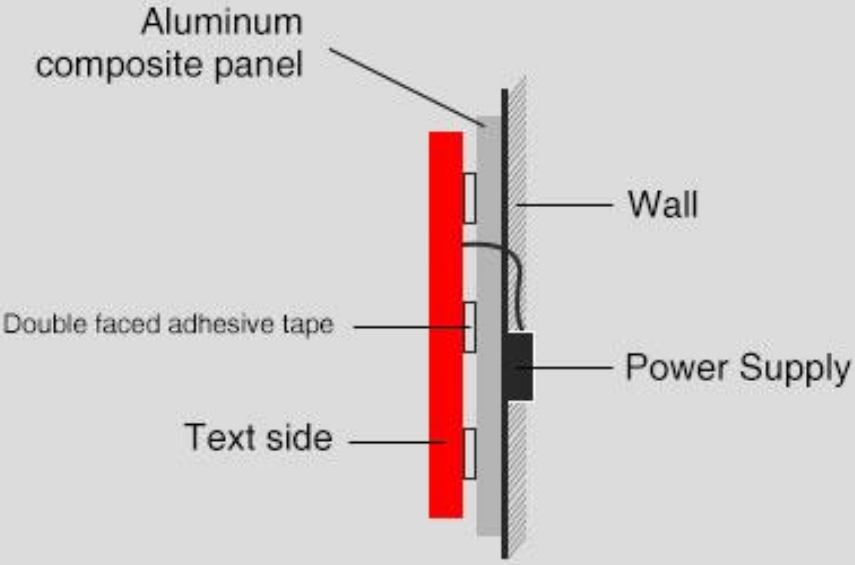
Aluminum composite panel
Wall
Double faced adhesive tape
Power Supply
Text side

2. Use double-sided tape to fix the text with aluminum-plastic plate

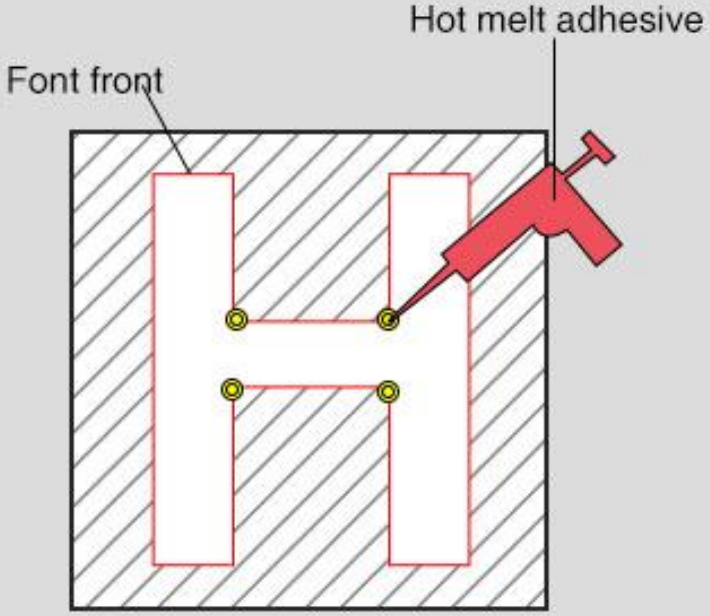
Hot melt adhesive
Font front

3. Stick double-sided adhesive tape on the lining plate on the back of the text


Glass cement
Font front

4. Use a glass glue gun to apply glass glue along the edge of the word

External foot installation


Aluminum composite panel
Wall
Percussion drill

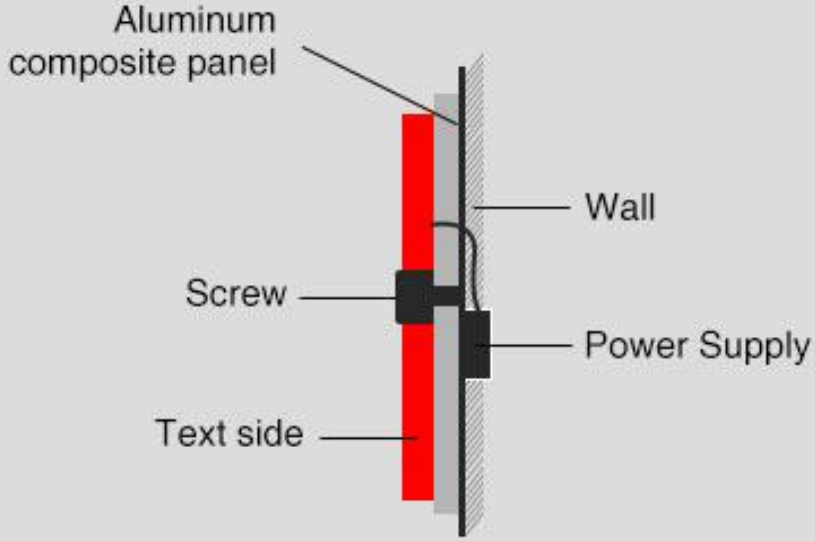
Aluminum composite panel
Wall
Screw
Power Supply
Text side