NEOCAN

8218 INJECTION LED MODULES

Quality l Bright l Waterproof

2835 CHIP

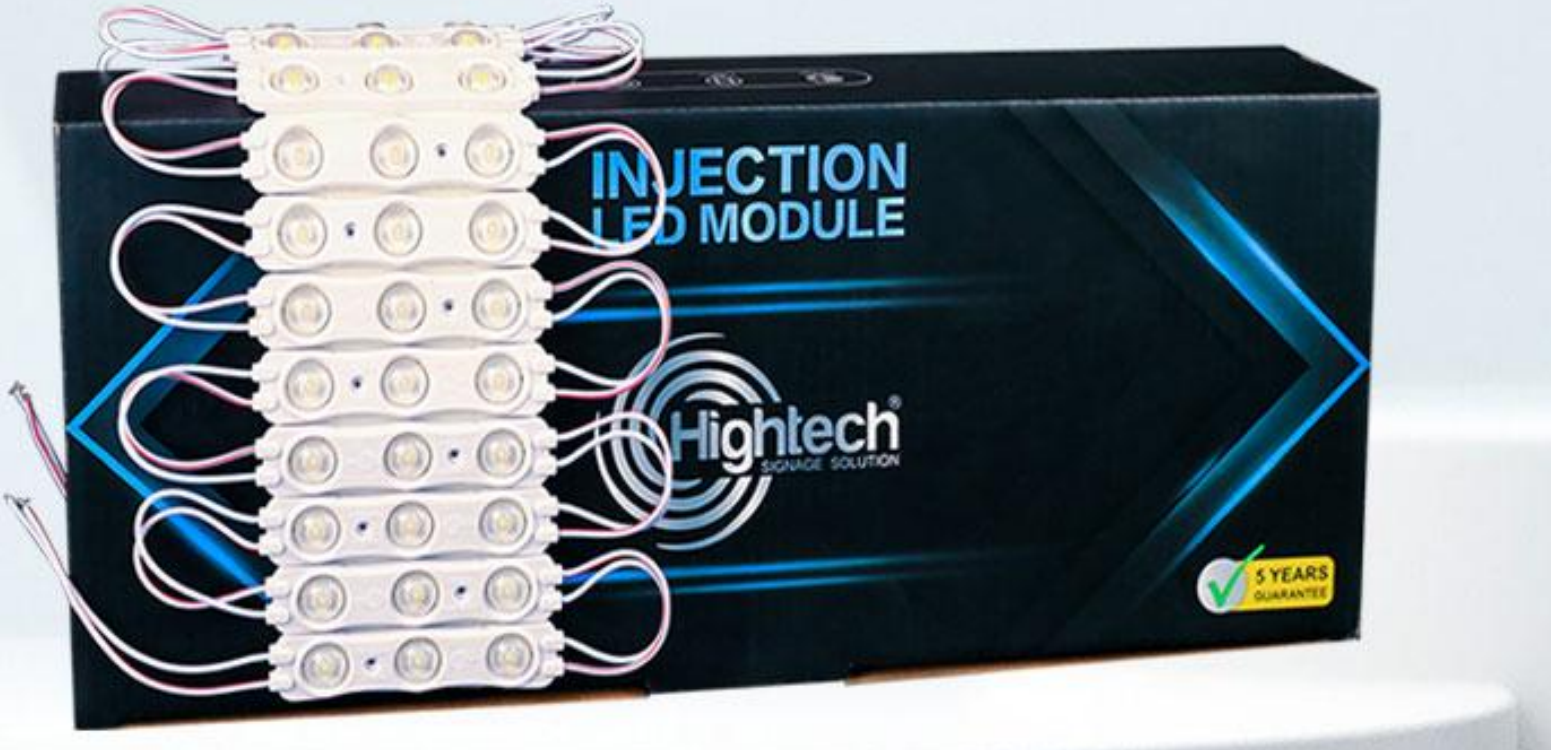
INJECTION
LED MODULE
Hightech
SIGNAGE SOLUTION
5 YEARS
GUARANTEE

NEOCAN

PRODUCT ADVANTAGES

FAMOUS BRAND, GOOD QUALITY

- Optical lens
- Highlight LED
- IP67

- Mild color rendering
- Safety eye protection
- Scientific heat dissipation

GOOD LED!

Because good lamp beads

2835 chip high brightness, stable light, no flash rate

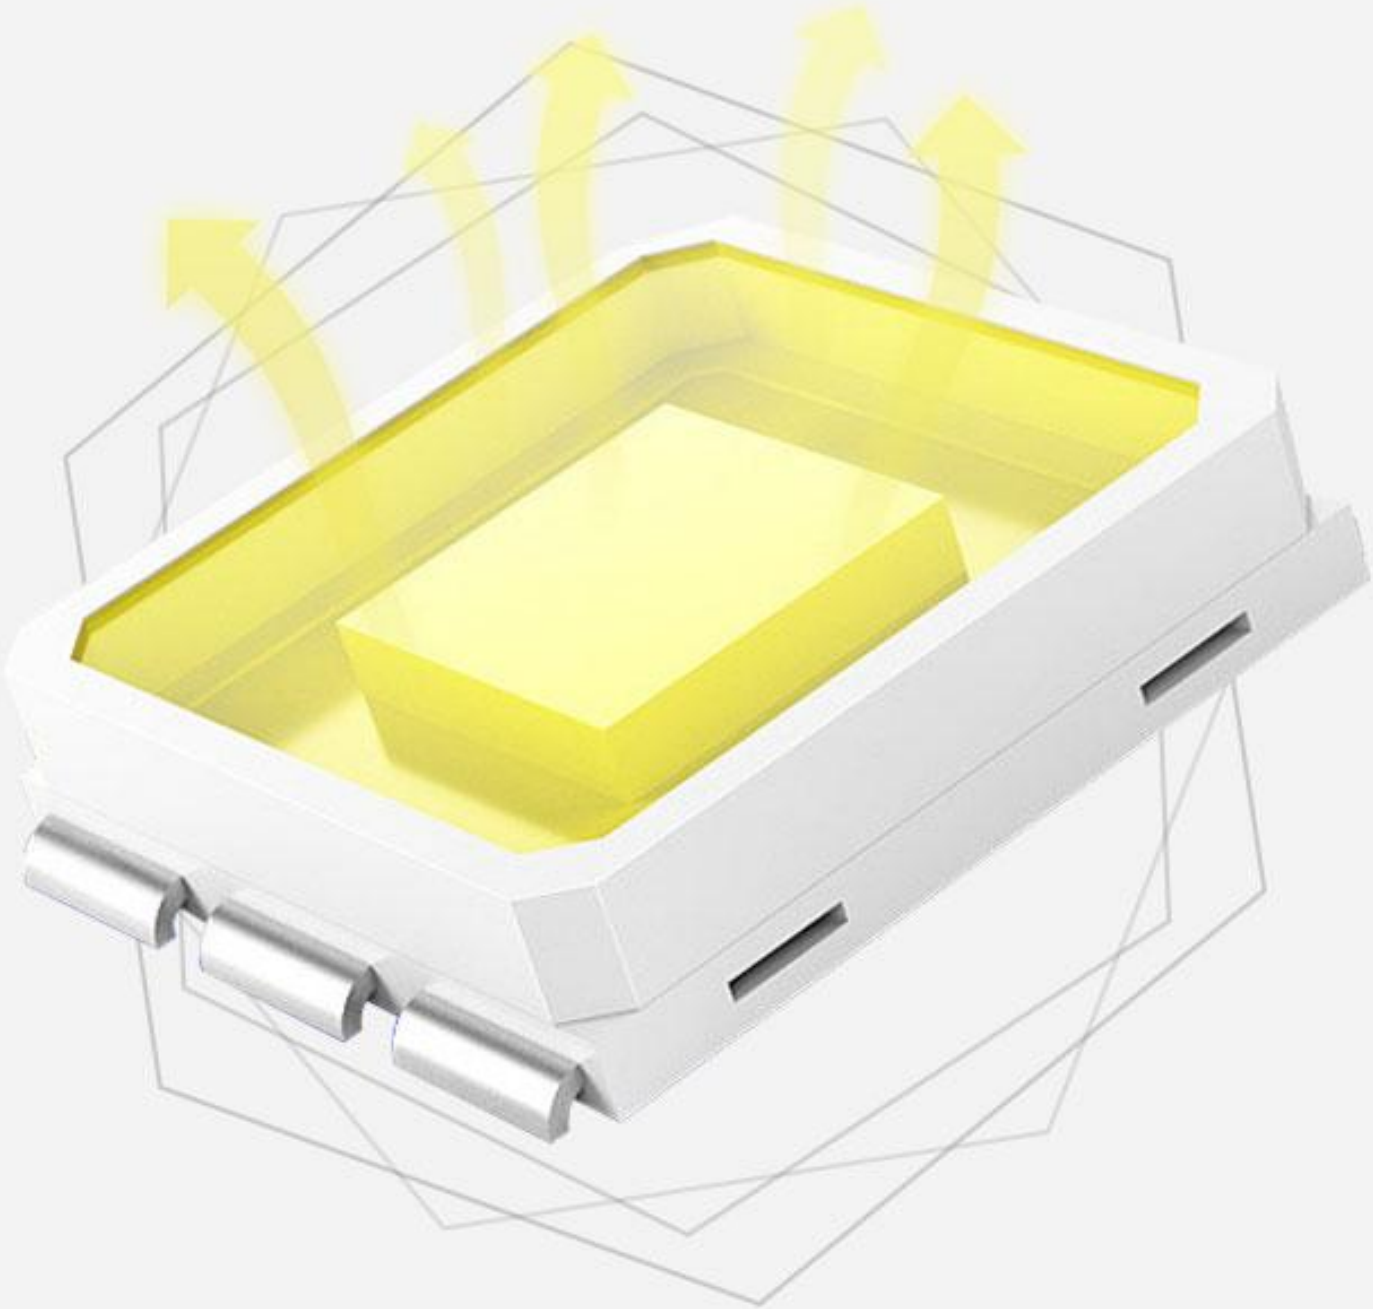

NEOCAN

Four guarantees

Strong strength is worth choosing

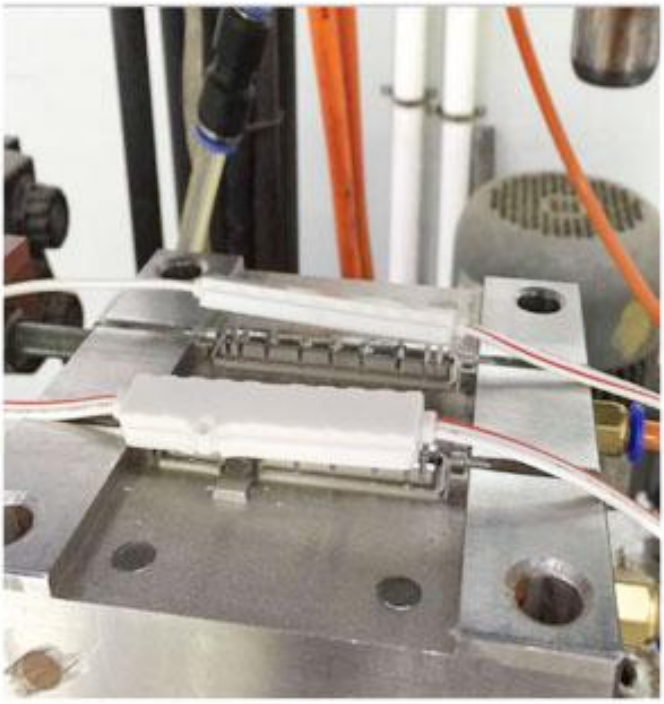

Source manufacturer

Spot delivery

Quality assurance **Professional team**

Product details

[illegible]

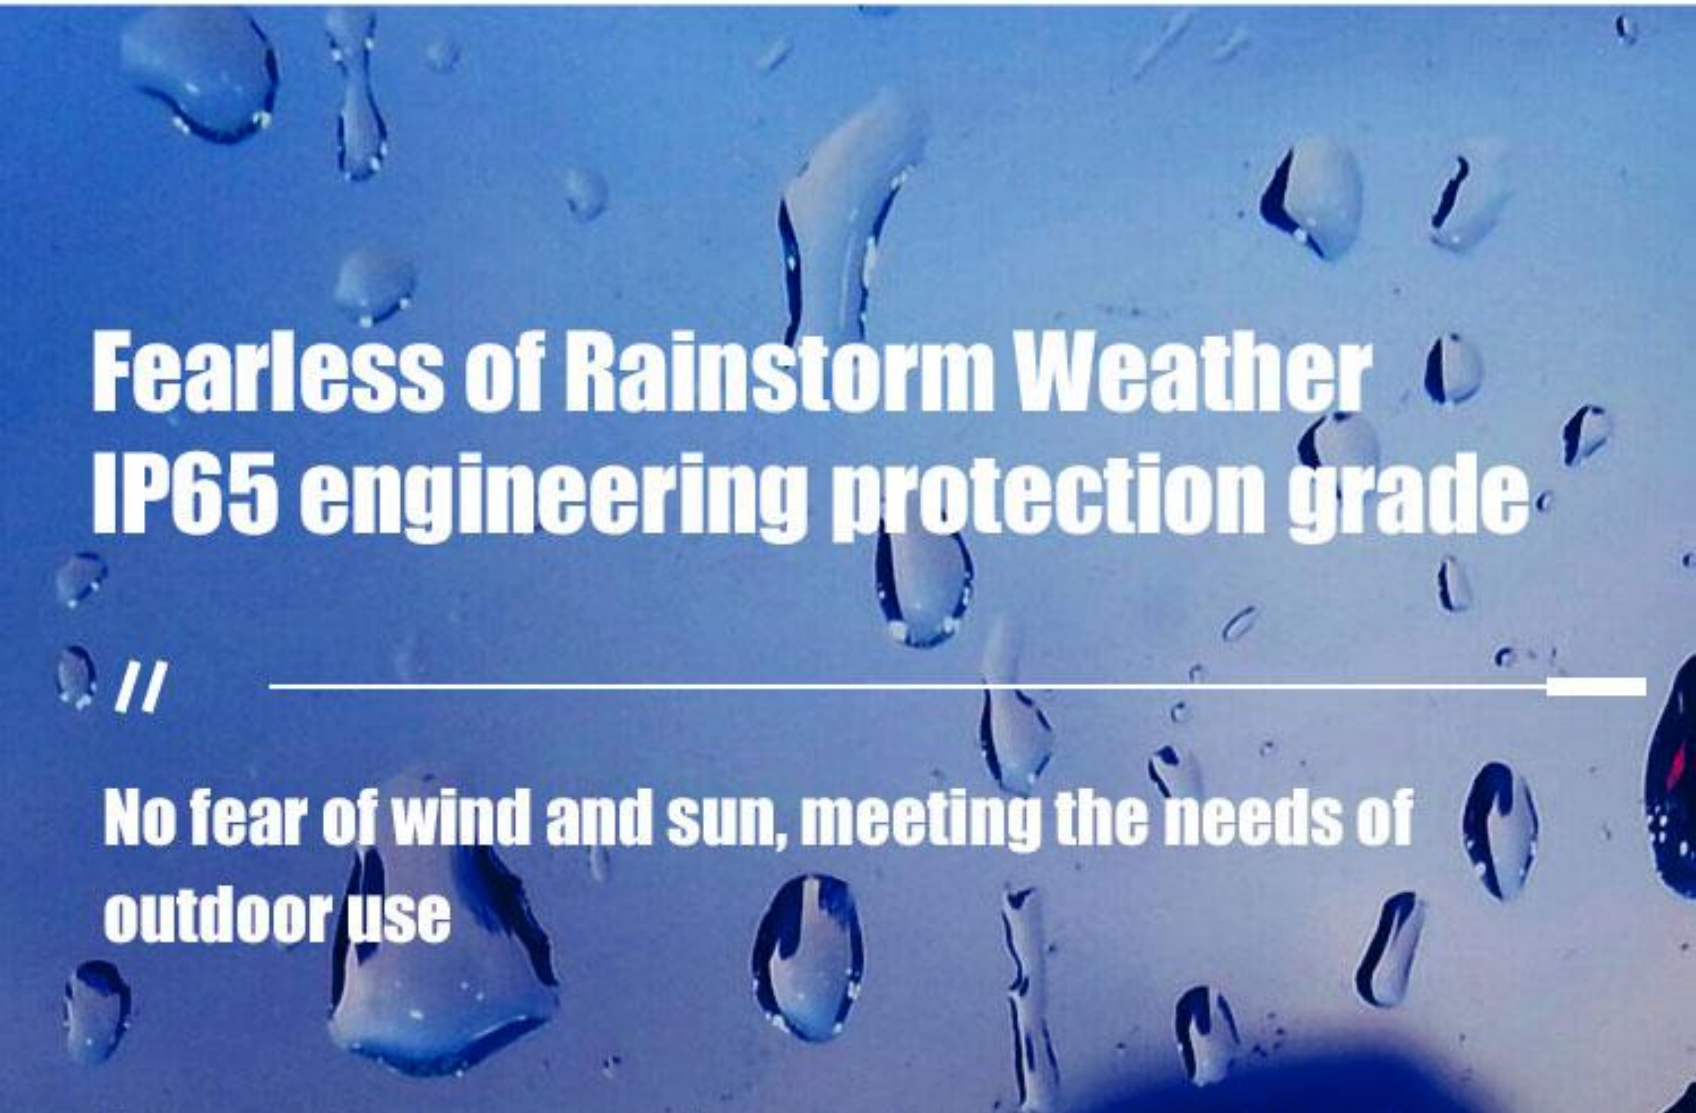

Fearless of Rainstorm Weather IP65 engineering protection grade

//

No fear of wind and sun, meeting the needs of outdoor use

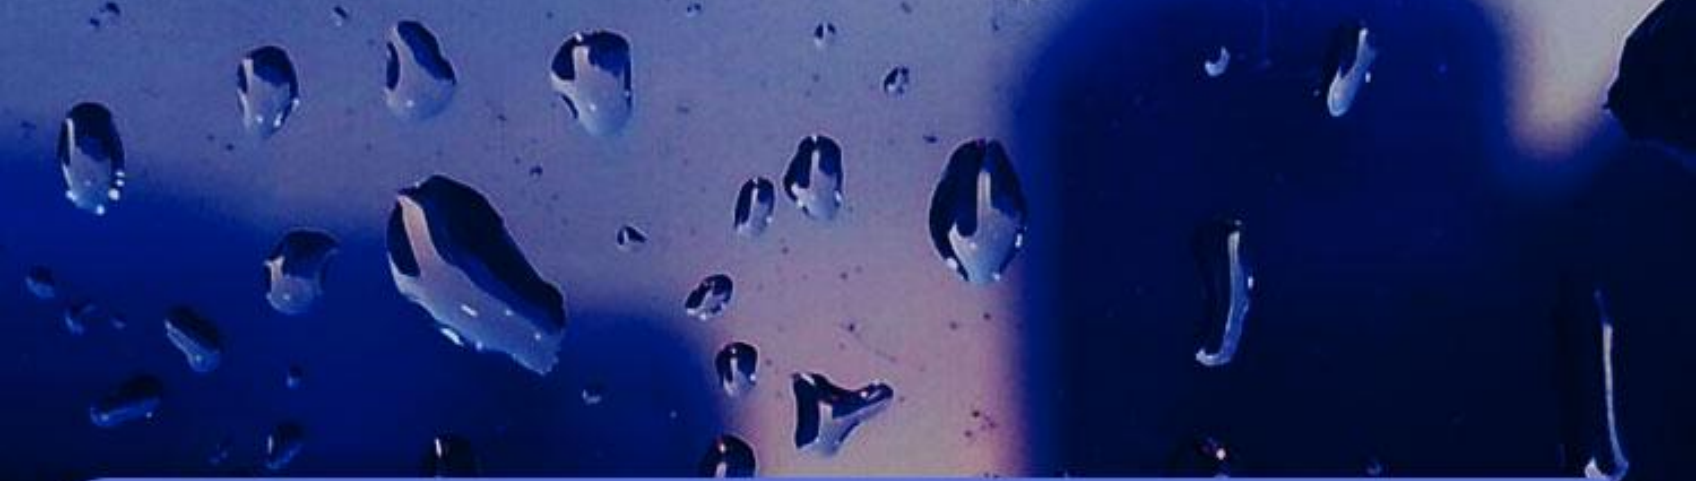

Waterproof immersion test

We are higher than the waterproof standard.
Don't worry about rain and humidity
This is a truly waterproof LED module

LED lights up after soaking in water,
and everything is still normal

[illegible]

Optical lens

With good chips and bright light beads, the lighting effect is good and the service life is long

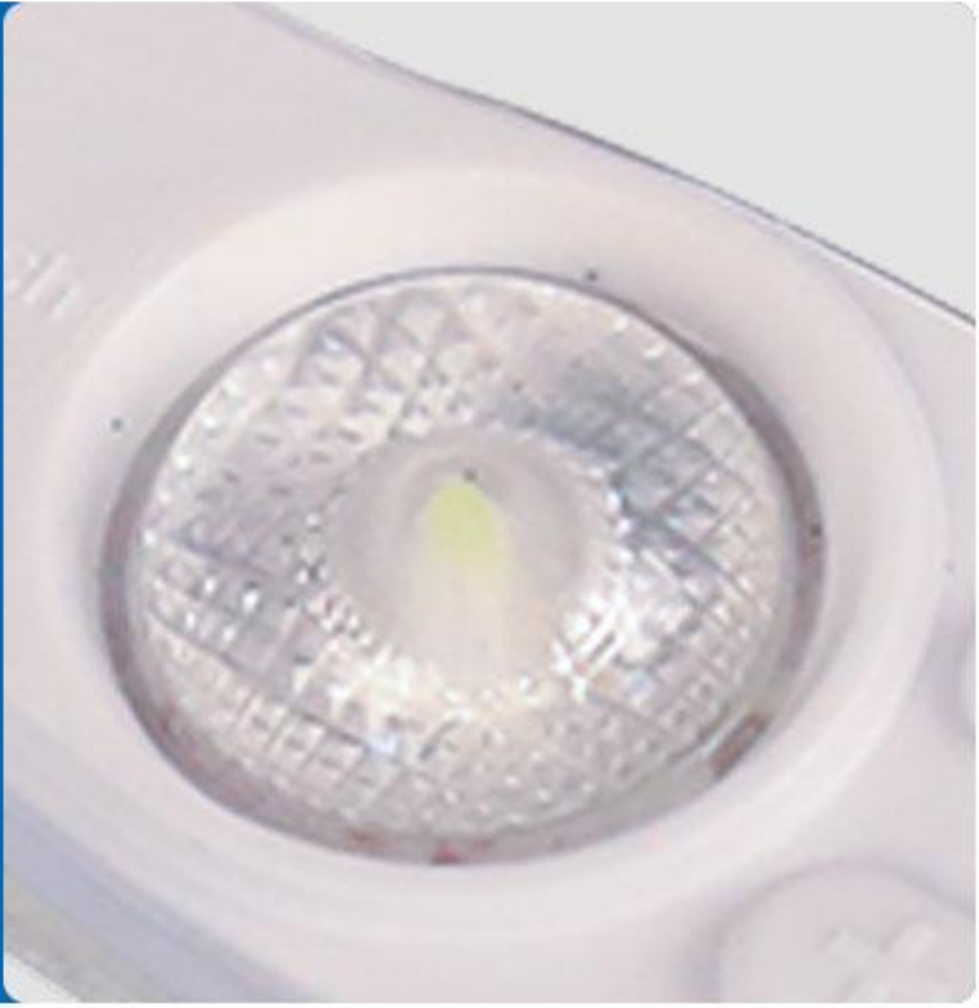

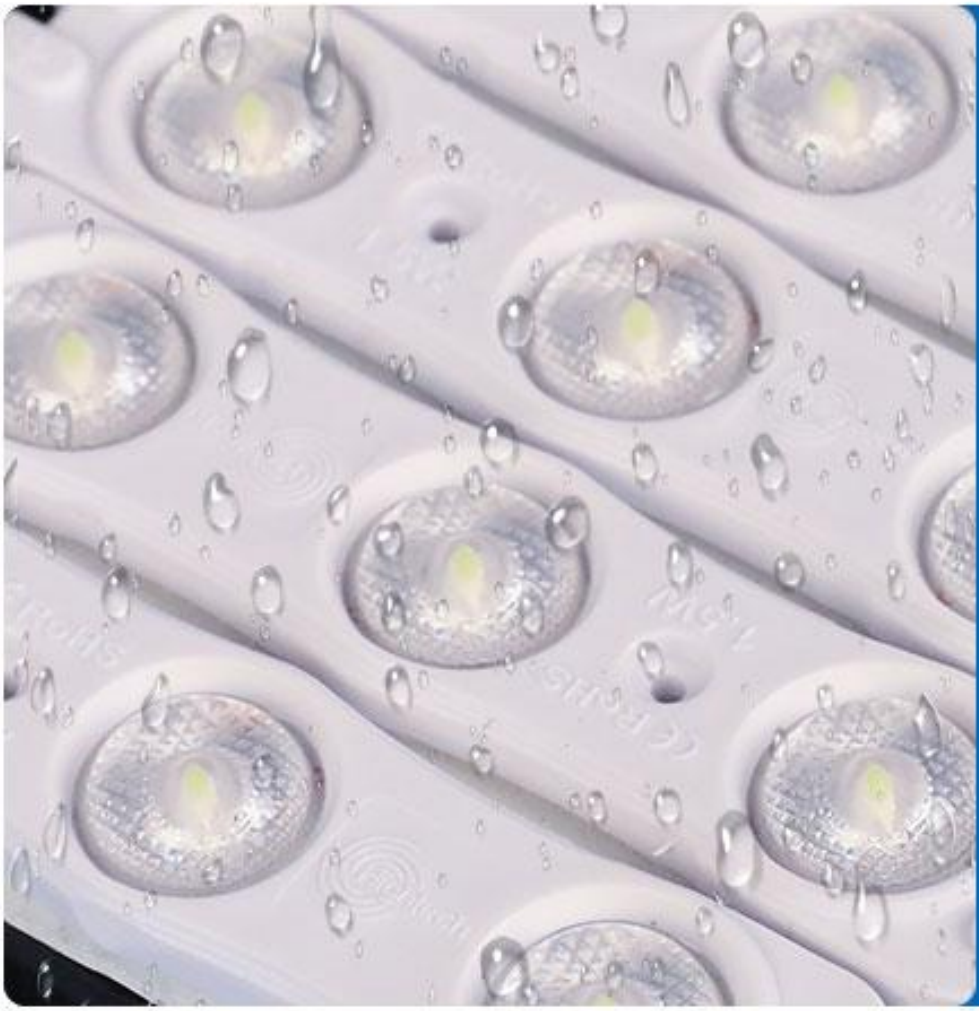

Integrated injection molding waterproof

Waterproof, rainproof, snow proof, frost resistant, and can be used in extreme weather

3M back glue

Full cover 3m adhesive tape with excellent performance

E FOAM
3M PE FOAM
M
3M PE
M PE FOAM
3M PE FOA
AM

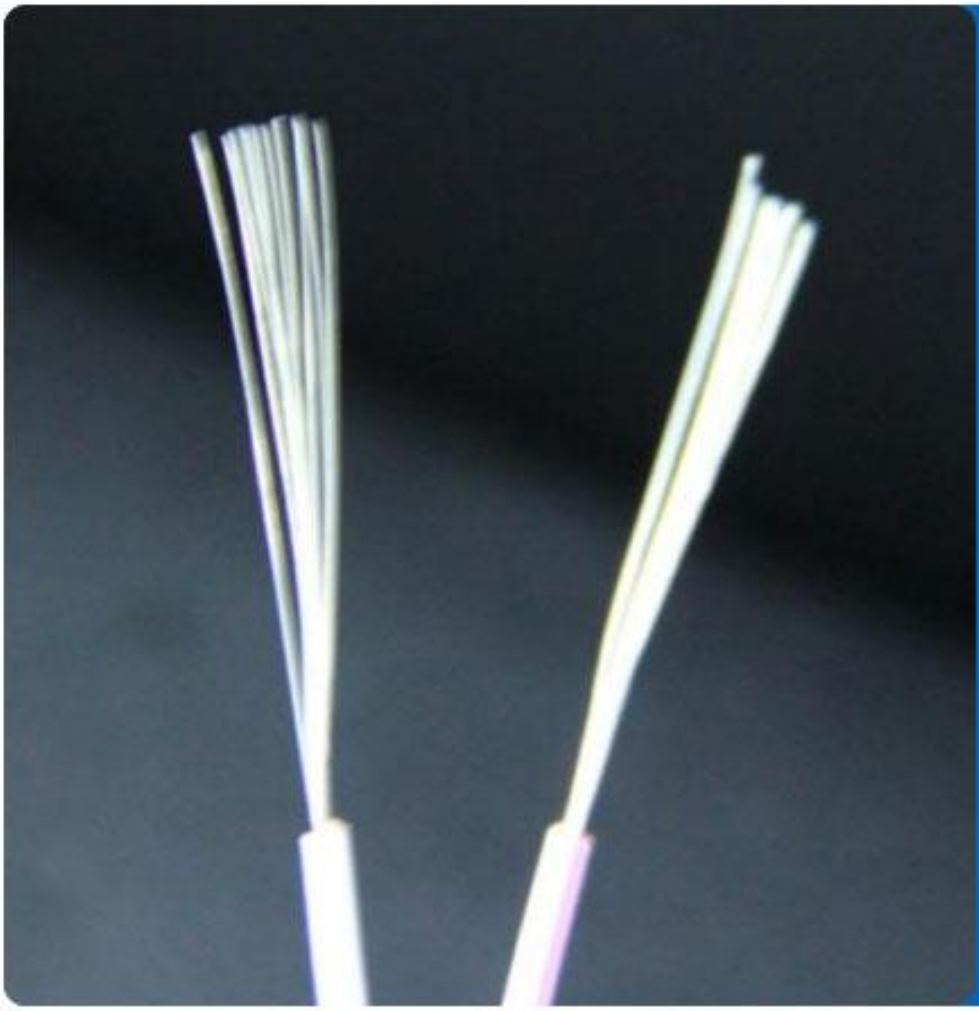

Integrated injection molding waterproof

Waterproof, rainproof, snow proof, frost resistant, and can be used in extreme weather

Stable output

//

One model has two resistors, and the output is more stable

7514-3w2835
+

Product parameters

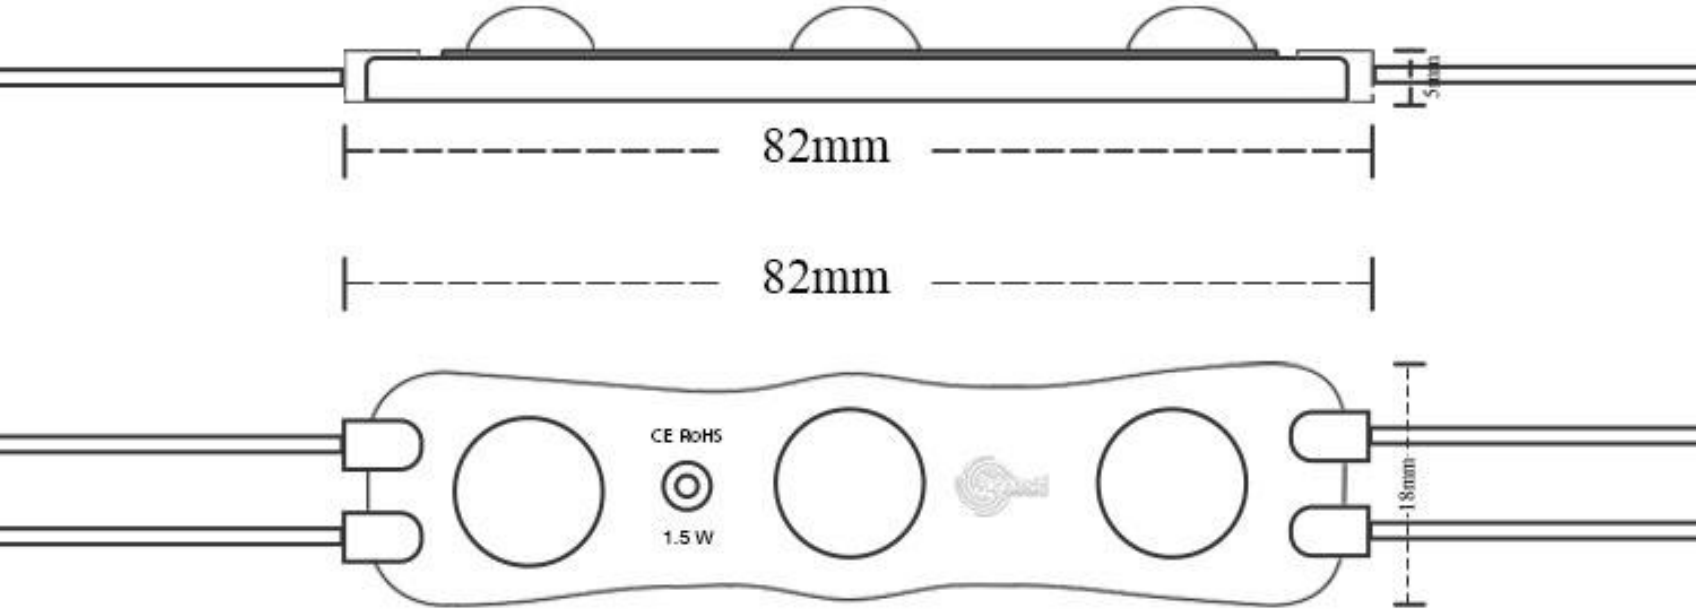
5mm
82mm
82mm
CE RoHS
1.5 W
18mm

Product model :	**HT-8218**
Power:	**1.5W**
Length between module:	**7cm**
Guarantee:	**5 Year**

Shell:	**100% Pure ABS**
Adhesive Tape:	**full cover PET tape (6 cm width)**

Product display

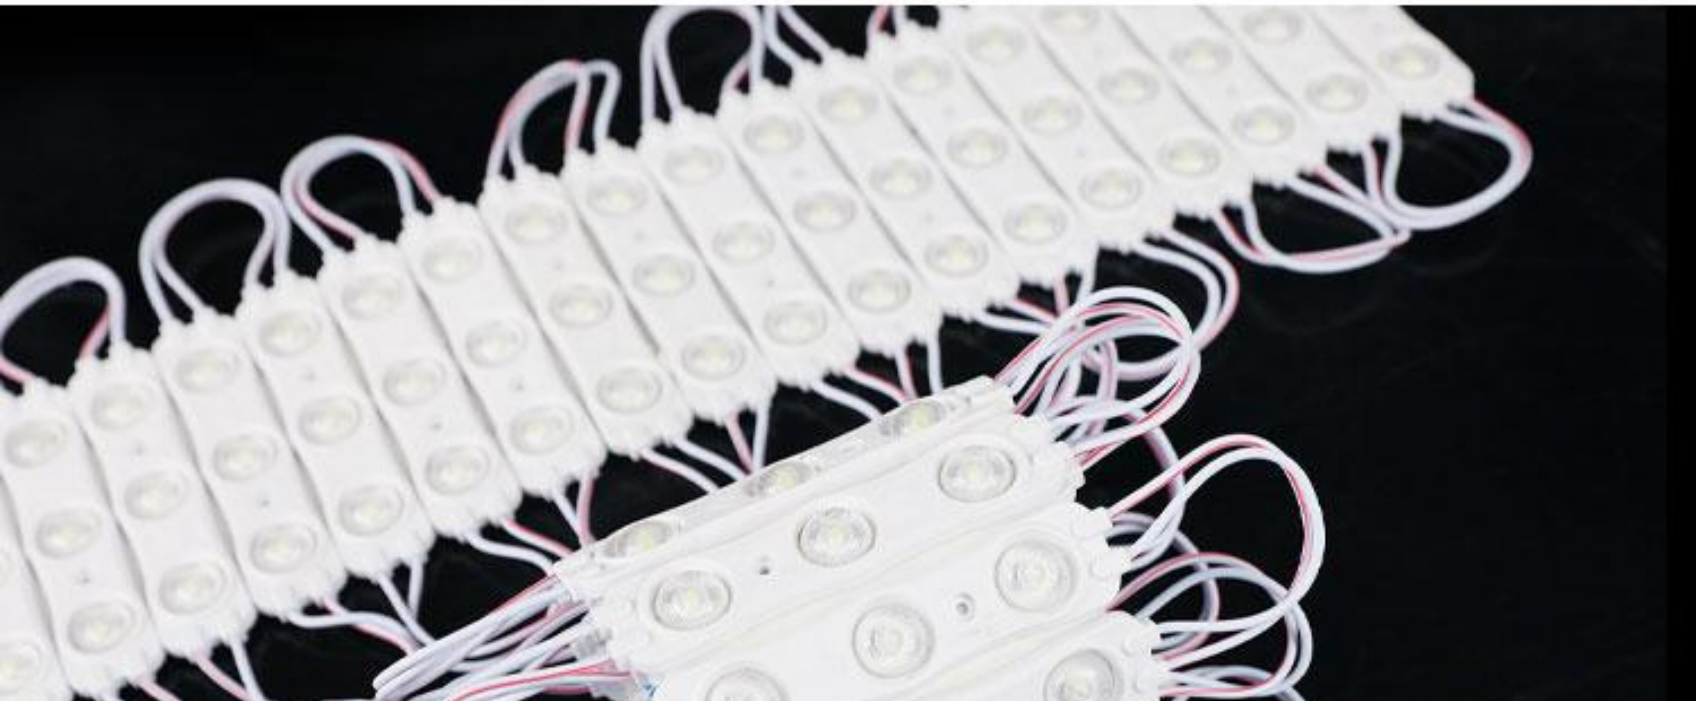

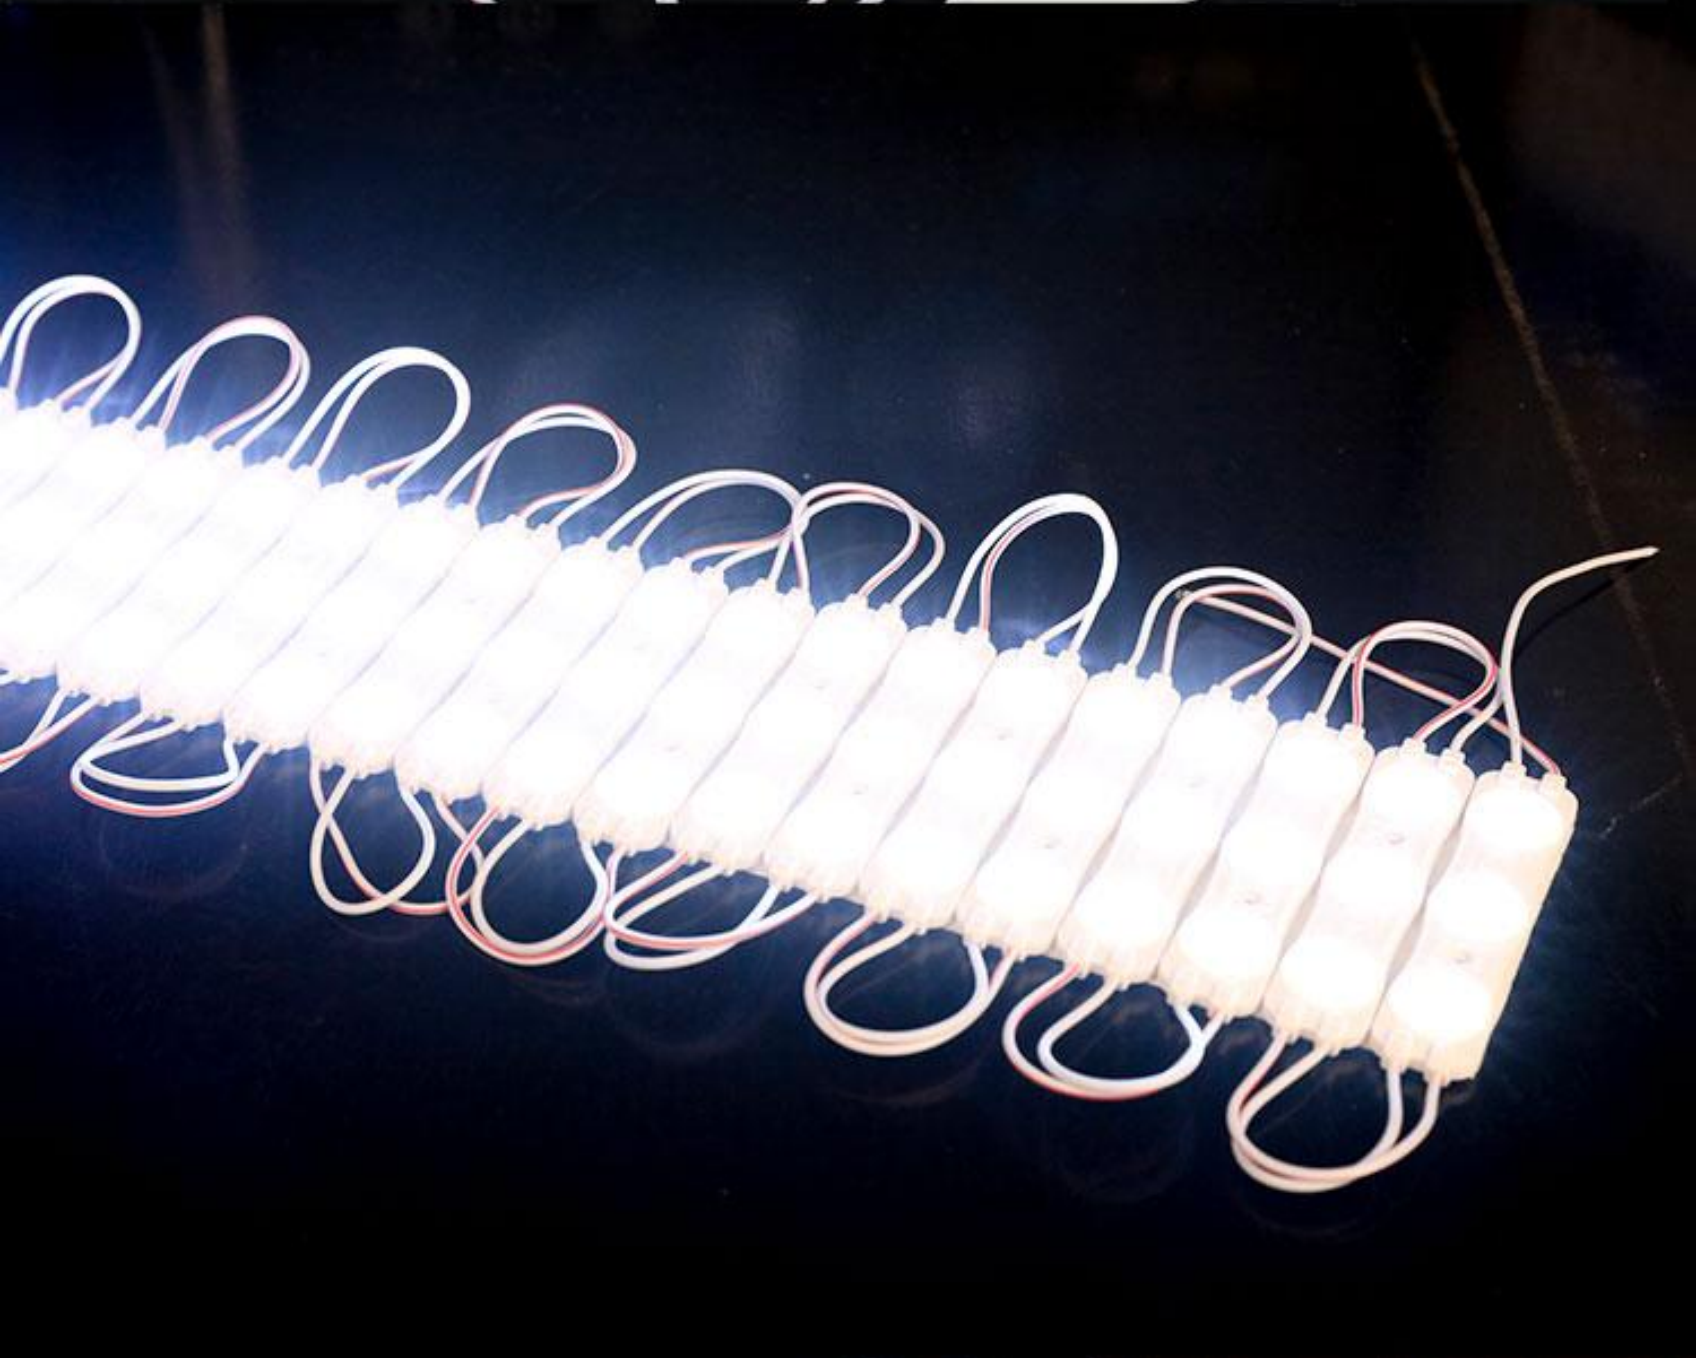

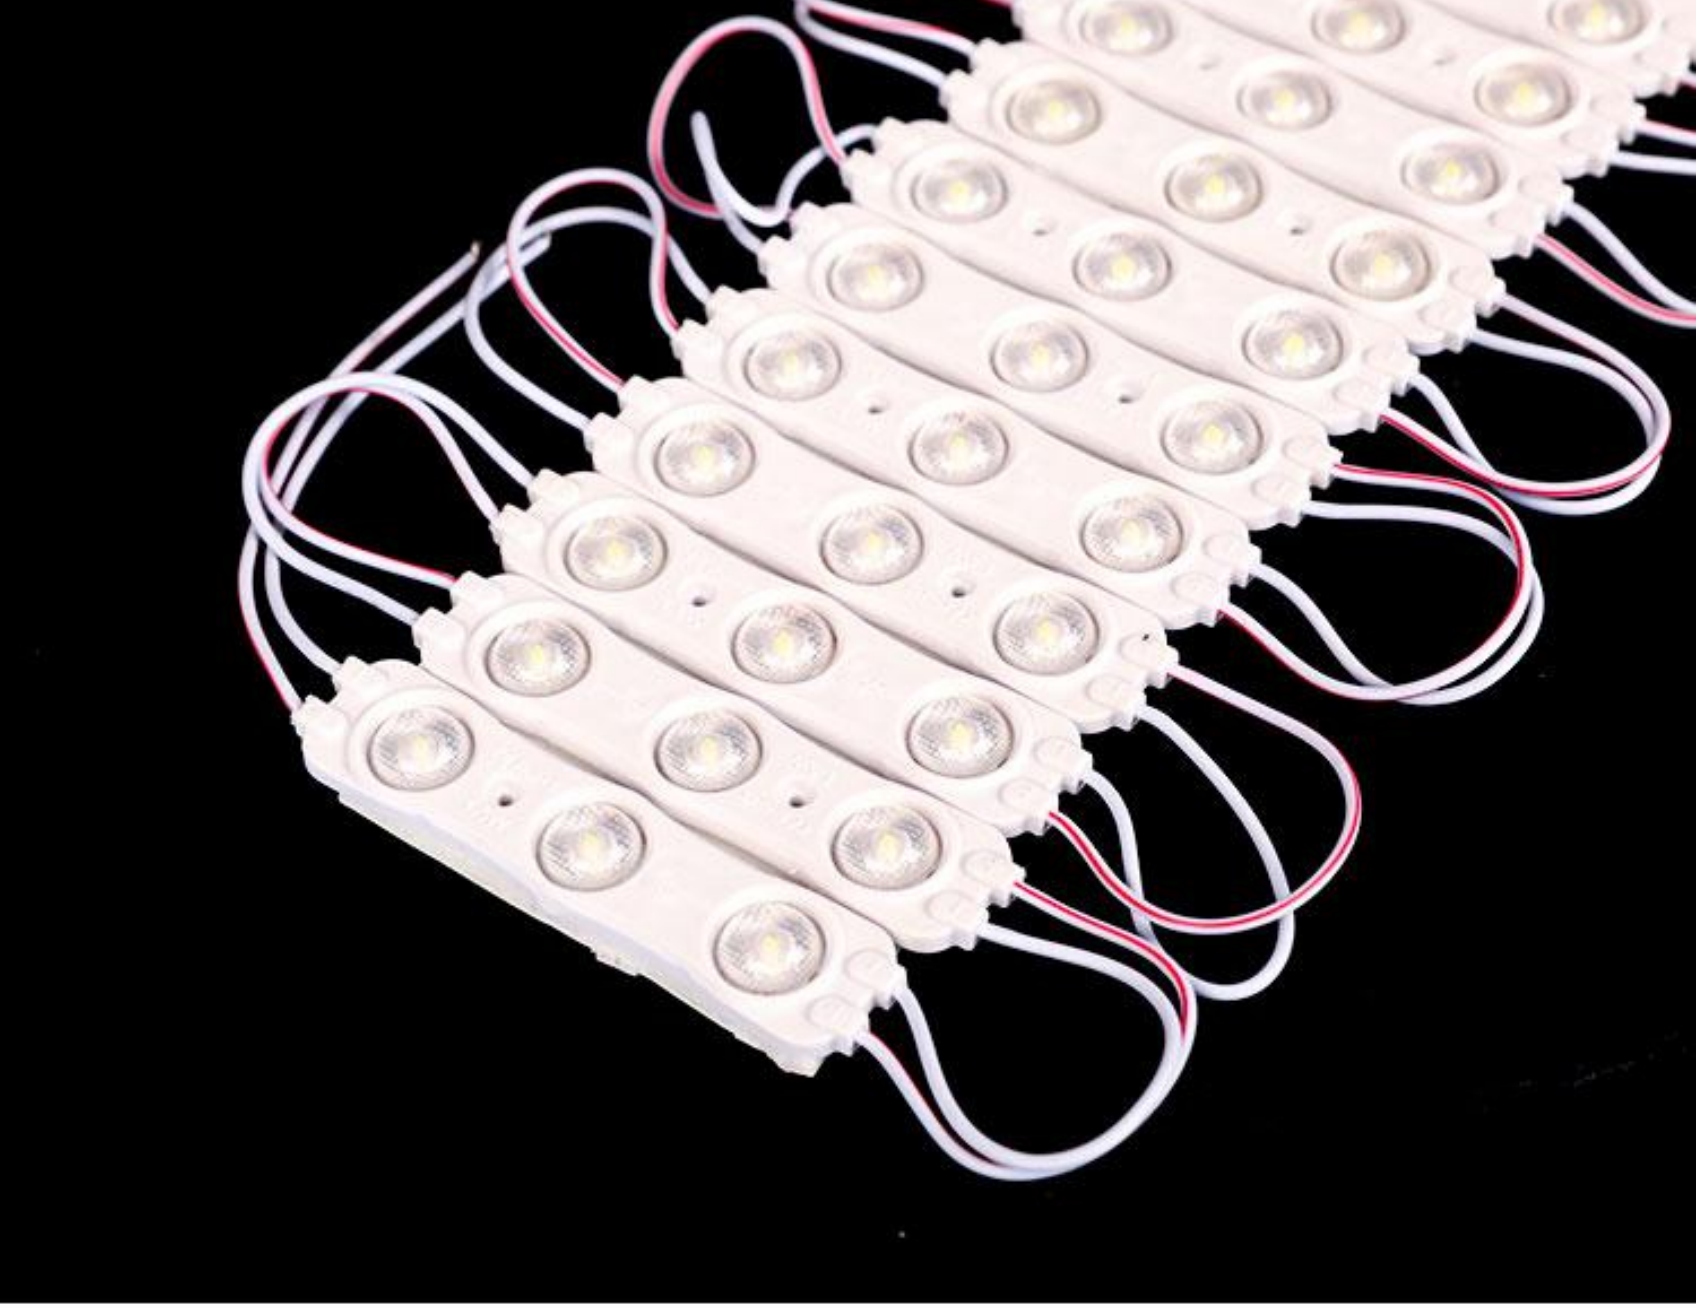

Installation diagram

Powersupply

Power mainline usage 2 × 1.5mm^2 If the power line of the straight bar lamp needs to be lengthened, the above cable must be 0.75mm^2/ 18 # wires of above specifications, so as to avoid

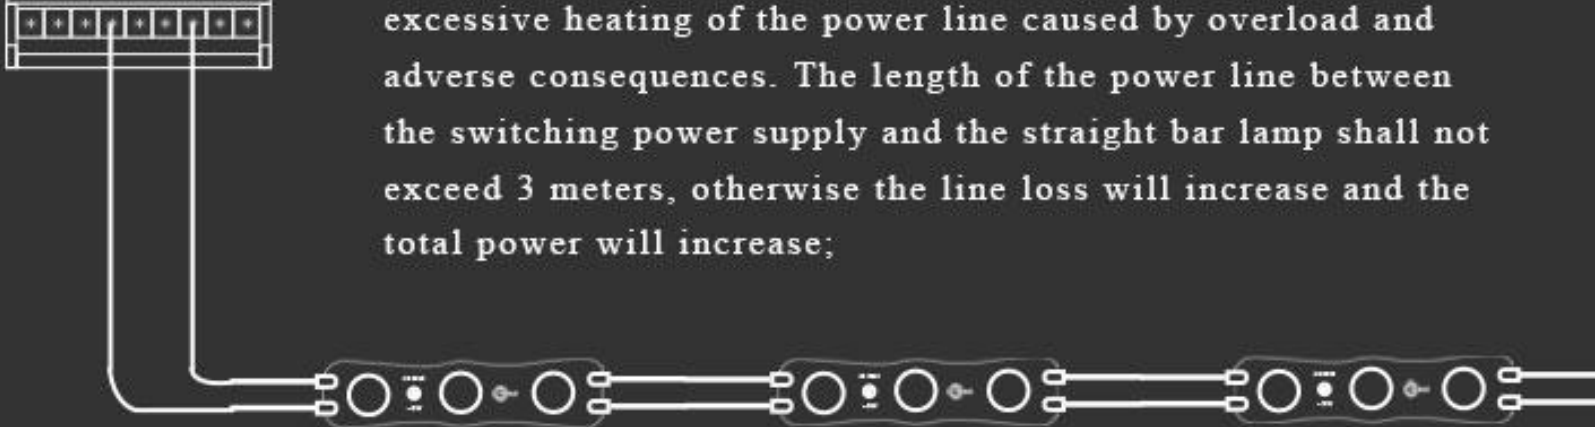

excessive heating of the power line caused by overload and adverse consequences. The length of the power line between the switching power supply and the straight bar lamp shall not exceed 3 meters, otherwise the line loss will increase and the total power will increase;

Effect display

SAMSUNG
lenovo

Leisure Centre