



**SUNPRISM**  
ENERGY TECHNOLOGY

# SP-M72 Series

## 335 W – 380 W

Monocrystalline Photovoltaic Module

### KEY FEATURES



High Power Output up to 380 Wp



PID Resistant Components



Improved Temperature Coefficient



Superior Low Light Performance



5400 Pa

High Load Resistance up to 5400 Pa



100% EL & HV tests on all modules



IP68 Rated Protection



### PREMIUM SOLAR PANELS SINCE 1997

SUNPRISM Energy Technology is a pioneering Egyptian manufacturer of solar PV modules, with a successful track record of over 20 years of manufacturing premium solar modules. Our acquired experience comes from the heritage of our world-class engineers specialized in this domain since 1992.

Up to **21 %**  
CELL EFFICIENCY

**1500 V**  
STANDARD ON ALL MODULES

**10 YEAR**  
PRODUCT WARRANTY

**25 YEAR**  
LINEAR POWER WARRANTY



# SP-M72 (355 W – 380 W)


## Technical Specifications SP-M72

			355	360	365
Nominal Power	$P_{max}$	[W <sub>p</sub> ]	355	360	365
Module Efficiency		%	18.13	18.38	18.64
Rated current	$I_{MP}$	[A]	9.08	9.15	9.22
Rated Voltage	$V_{MP}$	[V]	39.10	39.36	39.59
Short circuit current	$I_{SC}$	[A]	9.61	9.68	9.71
Open circuit voltage	$V_{OC}$	[V]	46.36	46.72	47.09

## Technical Specifications SP-M72

			370	375	380
Nominal Power	$P_{max}$	[W <sub>p</sub> ]	370	375	380
Module Efficiency		%	18.89	19.15	19.40
Rated current	$I_{MP}$	[A]	9.25	9.30	9.37
Rated Voltage	$V_{MP}$	[V]	40.01	40.34	40.57
Short circuit current	$I_{SC}$	[A]	9.75	9.80	9.87
Open circuit voltage	$V_{OC}$	[V]	47.52	47.80	48.02

Electrical data under Standard Test Conditions (STC) :Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25 °C, AM 1.5 +/--3% power measurement tolerance

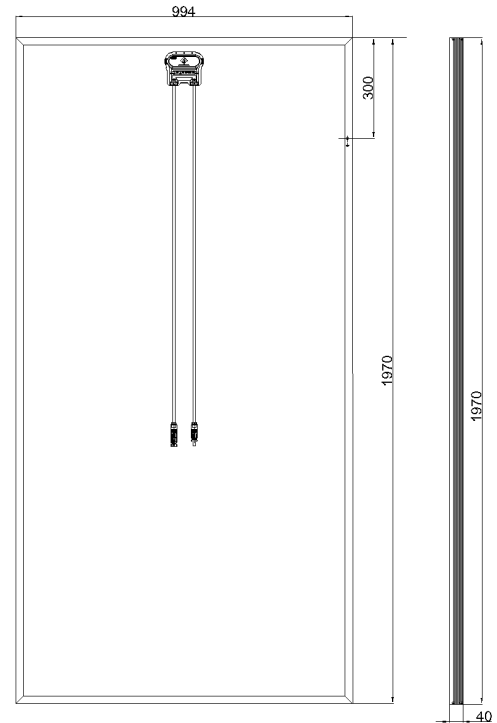

With assembly tolerance of ± 2 mm ( L & W)  
± 0.8 mm Thickness

## Properties for System Design

Operating Temp.	[°C]	-40 to 85	Nominal Operating Cell Temp.	[°C]	+ 44 ± 2
Protection class		II	Temperature coefficient $I_{SC}$	$\alpha$ [%/°C]	+ 0.057
Max system voltage	$V_{SYS}$ [V]	1500	Temperature coefficient $V_{OC}$	$\beta$ [%/°C]	- 0.31
Max series fuse rating	$I_R$ [A]	15	Temperature coefficient $P_{max}$	[%/°C]	- 0.42

Nominal Operating Cell Temperature (NOCT) :Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20 °C, Wind Speed 1m/s

## Mechanical Properties

Front covering	3.2mm AR tempered solar glass	Protection class	Junction box IP68 rated, 1500 VDC
Back covering	Monolayer high grade PET	Cable	4 mm <sup>2</sup> , length 1 m with MC4 compatible
Solar cell	72 Monocrystalline 6" PERC silicon cells	Weight	21.5 kg
Dimensions	1970 x 994 x 40 mm	HL-test	5400 Pa

Packaging Configuration 25 modules per box, 22 boxes per 40' HC container /10 boxes per 20' container

Over the years SUNPRISM Energy Technology has set high benchmarks with its high quality standards.

Continuous tests guarantee a consistently high level of quality. Every modules undergoes visual, mechanical, and electrical inspections.

Each module will be HV-tested and examined by electro luminescence. This is recognizable by means of the original SUNPRISM label, the serial number, and the SUNPRISM guarantee:

- 10 years product warranty
- 10 years linear performance warranty for a power output of 90%
- 25 years linear performance warranty for a power output of 80%
- Detailed warranty conditions and additional information can be found in our warranty terms
- Certified according to IEC 61215 and IEC 61730

\* SUNPRISM reserves the right to change specifications without prior notice

