

# MONSOON



## Irrigators Australia Pty Ltd

# TRAILCO

### Traveller T200-2

Soft Hose Irrigator

### Standard Equipment Fitted

- **Trailco Piston Drive** - Patented piston drive with minimal pressure loss. Reduces pumping costs and maintenance. No chains, sprockets, belts or gearboxes.
- **Powerful Drive Unit** - Double-acting piston with mechanical valve for reliable, smooth operation and adjustable travel speeds.
- **Compact & Stable Design** - Short turning circle and four-wheel layout for easy handling and stability.
- **Long Life Construction** - All major components galvanised or plated for corrosion protection.
- **Angus Premium Hi Flow Hose** - High-quality irrigation hose with a 10 year warranty.
- **Automatic Shut Off** - Stops automatically at the end of the run.
- **Constant Travel Speed** - Ensures excellent water uniformity with simple speed adjustment.
- **Accurate Steering** - Automotive-style steering for straight tracking and stability.
- **Cable Drum Brake** - Prevents cable over-run and damage during towing.
- **Cable Rewind Handle** - Allows easy cable recovery if a run is aborted.
- **Automatic Start Up** - Self-engaging system starts forward travel automatically after set-up.
- **Hose Side Lay Arm** - Lays hose safely to either side clear of the travel path.
- **Heavy Duty Hose Reel** - Flat base spool design protects hose and extends service life.
- **PTO Hose Rewind** - PTO-driven rewind allows hose retrieval from the towing position.
- **Self Cleaning Filter** - Protects the drive system from debris.
- **Easy Servicing** - All service points are easily accessible.
- **Pressure Gauge** - High quality liquid filled gauge fitted to the sprinkler.



### Optional Extras

- **Alloy wheels** - With 5.20 × 10" tyres
- **Sprinkler Tilt** - Coupling for improved wind control
- **Rear Wheel Brakes** - For steep or slippery conditions

**Ideally suited for :**

**Compact design allows smooth operation around obstacles.**

# Performance Chart

## Trailco T200-2 with Sprinkler Gun

### PERFORMANCE TABLE

### TRAILCO T200 TRAVELLER

Sprinkler	Nozzle Diameter		Sprinkler Pressure		Output		Wetted Width		Approx Lane Spacing	Full Circle Precipitation Rate (avg)		200 Metre (10 CHN) Run				300 Metre (15 CHN) Run								
	mm ins		kPa PSI		l.p.s GPM		m ft.			mmph p.p.h		Approx. Area Per Run		Gross Application				Approx. Area Per Run		Gross Application				
												ha Ac		11 Hour Run		22 Hour Run		ha Ac						
Komet 101 Ultra	18.0	0.71	414	60	5.15	68	69	228	45	148	5.6	22.0	0.90	2.23	22.6	0.89	45.1	1.78	1.36	3.35	15.0	0.59	30.1	1.18
			483	70	5.30	70	72	237	47	154	5.3	20.9	0.94	2.32	22.3	0.88	44.7	1.76	1.41	3.48	14.9	0.59	29.8	1.17
	20.6	0.81	414	60	6.97	92	72	237	47	154	7.0	27.5	0.94	2.32	29.4	1.16	58.8	2.31	1.41	3.48	19.6	0.77	39.2	1.54
			483	70	7.43	98	77	252	50	164	6.6	26.0	1.00	2.47	29.5	1.16	58.9	2.32	1.50	3.70	19.6	0.77	39.3	1.55
Komet 140 Ultra	21.8	0.86	414	60	7.88	104	77	252	50	164	7.0	27.5	1.00	2.47	31.3	1.23	62.5	2.46	1.50	3.70	20.8	0.82	41.7	1.64
			483	70	8.56	113	81	267	53	174	6.8	26.6	1.06	2.61	32.0	1.26	64.1	2.52	1.59	3.92	21.4	0.84	42.7	1.68
	23.6	0.93	414	60	10.38	137	81	267	53	174	8.2	32.3	1.06	2.61	38.9	1.53	77.7	3.06	1.59	3.92	25.9	1.02	51.8	2.04
			483	70	11.22	148	87	286	57	186	7.7	30.4	1.13	2.80	39.2	1.54	78.4	3.09	1.70	4.20	26.1	1.03	52.3	2.06
Komet 140 Ultra	21.8	0.86	483	70	7.58	100	80	262	52	170	6.2	24.5	1.04	2.57	28.9	1.14	57.8	2.28	1.56	3.85	19.3	0.76	38.6	1.52
			552	80	8.11	107	83	272	54	177	6.2	24.3	1.08	2.66	29.8	1.17	59.6	2.35	1.62	3.99	19.9	0.78	39.7	1.56
	24.6	0.97	483	70	9.78	129	86	281	56	183	7.0	27.5	1.11	2.75	34.8	1.37	69.6	2.74	1.67	4.13	23.2	0.91	46.4	1.83
			552	80	10.38	137	89	291	58	189	6.9	27.2	1.15	2.85	35.6	1.40	71.3	2.81	1.73	4.27	23.8	0.94	47.5	1.87
Komet 140 Ultra	27.4	1.08	483	70	12.43	164	92	301	60	196	7.7	30.4	1.19	2.95	41.3	1.62	82.5	3.25	1.79	4.42	27.5	1.08	55.0	2.17
			552	80	13.27	175	94	310	61	202	7.8	30.6	1.23	3.04	42.8	1.68	85.6	3.37	1.84	4.55	28.5	1.12	57.0	2.25
	30.0	1.18	483	70	15.47	204	98	320	63	208	8.5	33.5	1.27	3.13	48.3	1.90	96.6	3.80	1.90	4.70	32.2	1.27	64.4	2.54
			552	80	16.45	217	101	330	65	215	8.5	33.5	1.31	3.23	49.8	1.96	99.6	3.92	1.96	4.85	33.2	1.31	66.4	2.62

Note: Approximate Lane Spacings calculated using 0.65 wind factor (65% of the wetted width/sprinkler diameter)


\*Sprinkler performance is based on the manufacturers data which has been obtained under ideal test conditions and may be adversely affected by wind or other factors.

Hose Size - 63.5mm (2.5") x 100,150 & 200 Metres.

76mm (3") x 100 Metres.

Cable Length - 210 Metres (689'), 310 Metres (1017') & 411 Metres (1349')

### Shipping Dimensions

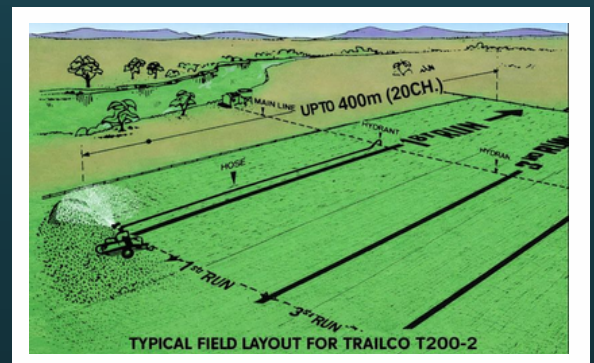

Irrigators Sales, Parts & Service

• EMAIL : sales@monsoonirrigators.com.au Phone : 0266 5252 64

