



ThermaSound®

The Next Generation of InsulationSM

ThermaSound® Product Line



ThermaSound® CMU Block Insert

- R*- Value: ~4.17 per inch @ 40°F
- ThermaSound® Block Inserts may increase the R-Value of a concrete block by as much as 100%!
- Insert compresses to fill the void space within the block
- Various sizes available




ThermaSound® Wall Insert

- Insert compresses to fit in-between wall studs even if the studs or joists are not exactly 16" on center
- R*- Value: ~4.20 per inch @ 25°F
- Insert size is 15"x 8'x 3 1/2" thick
- Various lengths available
- Great for basements and attics!



ThermaSound® Pipe Insulation

- R*- Value: ~4.80 per inch @ 25°F
- Insulates pipe up to 2" OD
- Various lengths and diameters available
- Proprietary durable coating applied at an additional charge

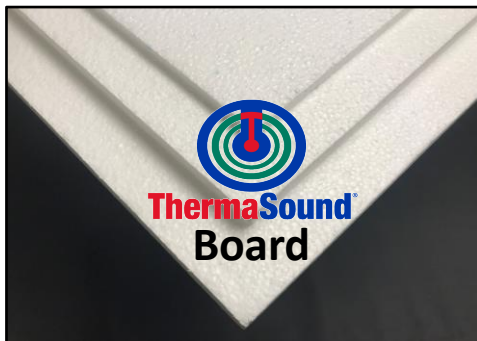

ThermaSound® Insulation Board

- R*- Value: ~4.35 per inch @ 25°F
- Board Density: ~0.90 pcf
- Board size: 4'x 8'
- Thicknesses available: 5/16", 9/16", 2"
- Custom sizes available with additional charges

*"R" means resistance to heat flow. The higher the "R" value, the higher the insulating power. The above information is from sources considered reliable. No warranty is expressed or implied and suitability for use in a particular application is the sole responsibility of the user.