


VISION

Hydraulic Controller with Serial I/O

Features a Microprocessor-based CPU w/ Serial Connections

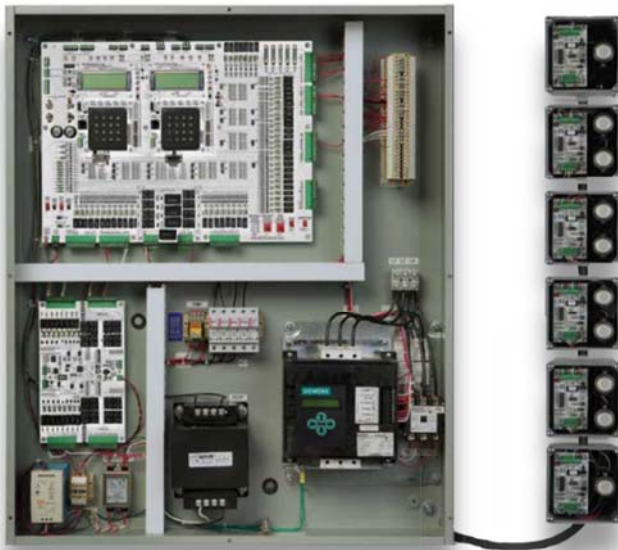

SPECIFICATIONS:

- Max Speed: 200 FPM
- Capacity: As Required
- Max Landings: 10
- Max cars in group: 8
- Code: ASME A17.1 & ASME A17.5
- Certification: CSA

STANDARD FEATURES:

- Serial Communication via CAN Bus
- EZ-Install with simplified wiring
- ELGO Absolute Positioning
- Real-time Group Dispatching & Homing
- Program Updates via USB Flash Drive
- Field Adjustable Settings w/Keypad
- Non-Proprietary Software
- LCD Display w/Status Screens
- LED Status Indicators
- Door Nudging & ICU Operation
- NEMA I Enclosure

OPTIONAL FEATURES:

- Wi-Fi Diagnostics via Web Interface
- Remote Monitoring Capability
- Lift-Net® Compatible
- Hospital / EMT Service
- SAPB, SBC, CPPB, Call & Send Operation
- Card Readers / Security
- Car-to-Lobby / Commandeering
- Emergency Power Operation
- Battery Rescue
- Solid State Starters
- Digital PI Interface
- Staggered or Walkthrough Openings
- Manual or Power Freight Doors
- NEMA 12, 4, 4x, 7, or 9 Enclosures

Serial I/O for EZ Install



2513 Mechanicsville Turnpike
Richmond, VA 23223
804 225 5530 ☎
804 225 0116 📧
www.vacontrols.com