


Backhoe/Trackhoe Operators Exam

True or False		(Must get a minimum of 12 questions correct)		
		Spotters are required to assist operators in recognizing hazards.		
		Operators must be aware of the swing path of the machine and must not swing loads over any personnel in the area.		
		When a backhoe/loader/trackhoe is used for material handling the operator must respond to the hand signals of the Spotter and stop at once, regardless of who gives the signal.		
		The operator is not responsible for keeping personnel from entering the area around the boom of the backhoe/trackhoe.		
		As long as you are on level ground you can just turn the engine off and set the brakes without worry.		
		The backhoe/trackhoe shall only be operated from the operator's seat, which must be locked in the appropriate position.		
		The Operator can use the backhoe/loader/trackhoe transport personnel.		
		The safe operating distance from energized power lines is the same regardless of the voltage in the power line.		
		A "Do Not Operate" tag must be attached to the backhoe/loader/trackhoe anytime service work is performed.		
		. Loaders are equipped with a safety lock on the lift ram of the bucket. Anytime the bucket is raised for working on the engine this safety lock must be used.		
		. When traveling on an incline with a loaded bucket the load should always be pointed uphill.		
		. All equipment is required to have at least a 5 lbs dry chemical Fire Extinguisher mounted on the equipment at an accessible location.		
		. Getting the job done quickly is the top priority for an operator and they should operate at the fastest speed possible.		



- 14. The operating area of cab in the equipment should be kept free of debris, trash and tools.
- □ □ 15. If a good walk through inspection was performed yesterday only a quick check is required today.

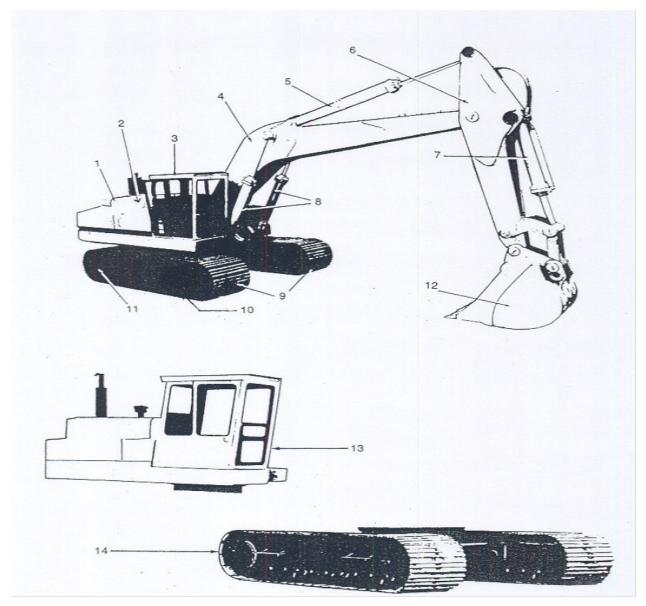

Fill in the Blank:

Identify the numbers below based on the picture above:



# 13	# 2
# 7	# 9
# 12	