



CATALOG 03/2023-US-A.4
INSERTS FOR PRIMA POWER/MULTITOOLS




INSERTS FOR PRIMA POWER/MULTITOOLS

MTPi24-8; MTP16-8; MT24-8; MTH16-8	page 6
MTPi10-16; MTP8-16; MT10-16; MTH16-16	page 7
MTPi8-24; MTP5-24; MT8-24	page 8
MT3Ri-31,75; MT3i-31,75.....	page 9
MT20i-8.....	page 10
MT8Ri2-16 (Version 2).....	page 11

TECHNICAL INFORMATION

O.D. Ground Special Shapes.....	page 14
EDM Required Special Shapes	page 15
PASS tool variety.....	page 16
Lifetime of tools regrind advice	page 17
PASS coating versions / draw-polishing	page 18
Die versions.....	page 19
Punches with different shear types.....	page 20
PASS back taper on punches	page 21
PASS corner radius on punches.....	page 22
PASS punches with reinforced shoulder	page 23

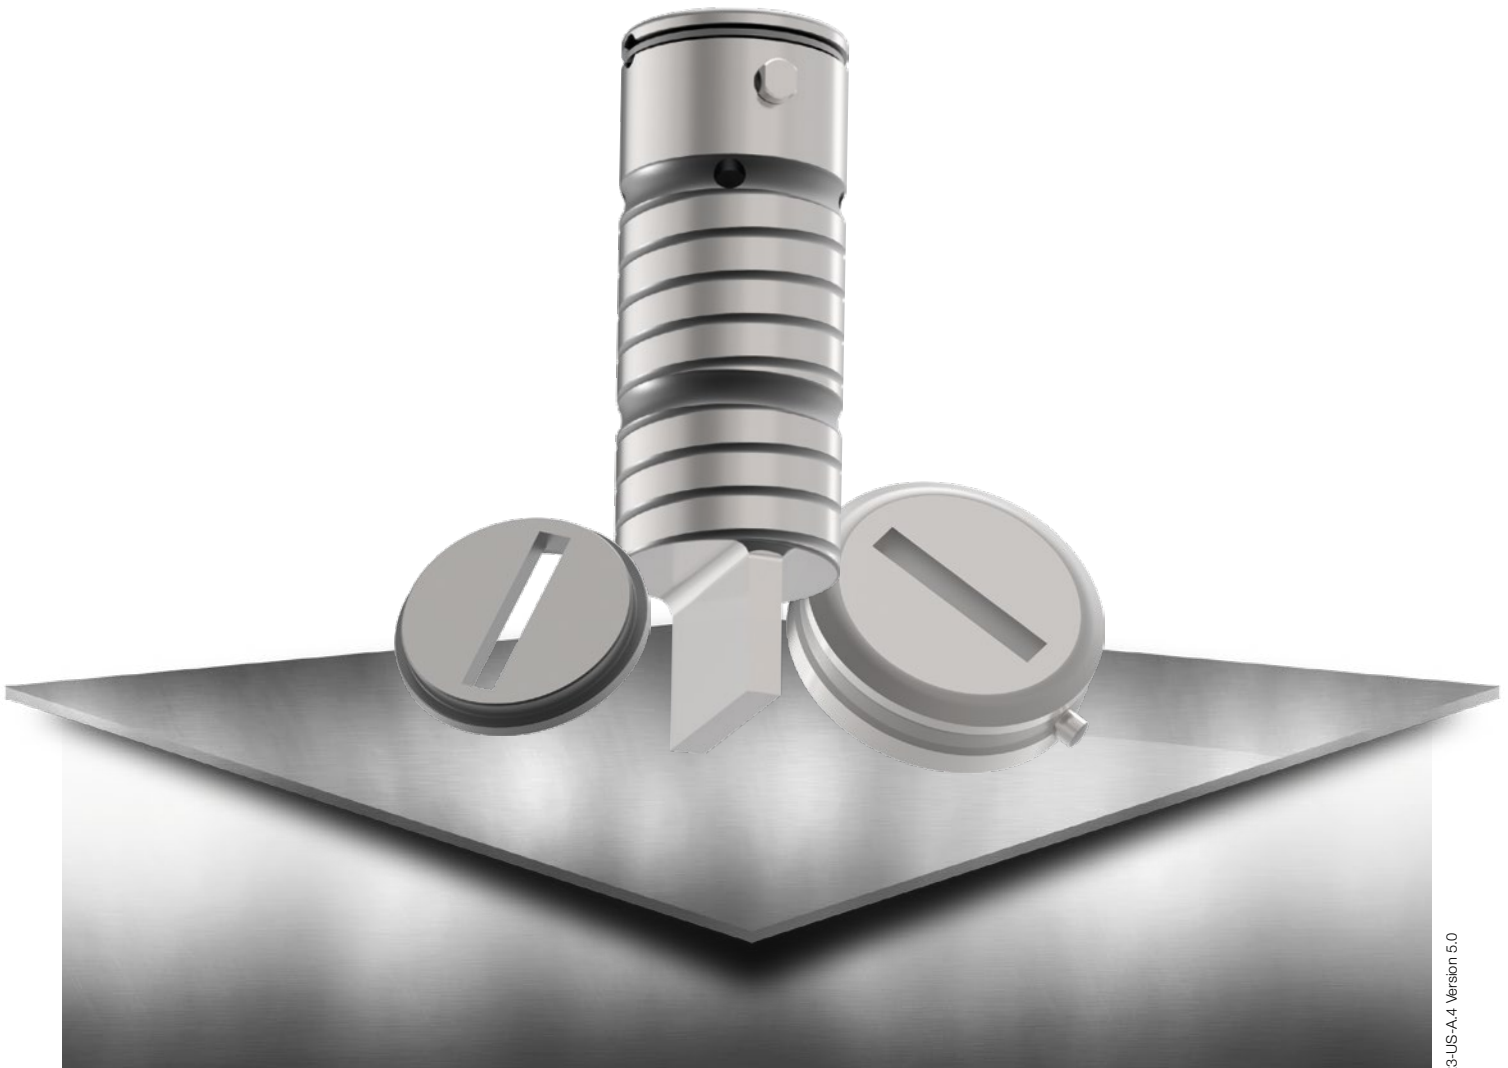

03/2023-US-A-4 Version 5.0

INSERTS FOR PRIMA POWER/ MULTITOOLS


PASS TOOLS FOR YOUR
PRIMA POWER/MULTITOOL SYSTEM

INDEX

MTPi24-8; MTP16-8; MT24-8; MTH16-8	page 6
MTPi10-16; MTP8-16; MT10-16; MTH16-16	page 7
MTPi8-24; MTP5-24; MT8-24	page 8
MT3Ri-31,75; MT3i-31,75	page 9
MT20i-8	page 10
MT8Ri2-16 (Version 2)	page 11

PRIMA POWER

MTPi24-8; MTP16-8; MT24-8; MTH16-8

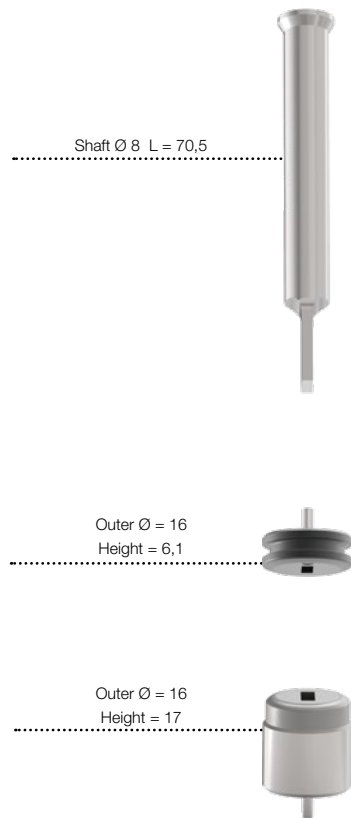

PART-NO.

PUNCH (H-PM®)

Round	413121
Square	413122
Rectangle	413123
Oblong	413124
O.D. Ground Special Shape	41312G
EDM Required Special Shape	41312E

STRIPPER

Round	415121
Square	415122
Rectangle	415123
Oblong	415124
O.D. Ground Special Shape	41512G
EDM Required Special Shape	41512E

DIE (HWS)

Round	414121
Square	414122
Rectangle	414123
Oblong	414124
O.D. Ground Special Shape	41412G
EDM Required Special Shape	41412E

ADDITIONAL COSTS FOR PUNCHES

- TICN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm



ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole

PRIMA POWER

MTPi10-16; MTP8-16; MT10-16; MTH16-16

		PART-NO.
PUNCH (H-PM®)		
	Round	413021
	Square	413022
	Rectangle	413023
	Oblong	413024
	O.D. Ground Special Shape	41302G
	EDM Required Special Shape	41302E
STRIPPER		
	Round	415021
	Square	415022
	Rectangle	415023
	Oblong	415024
	O.D. Ground Special Shape	41502G
	EDM Required Special Shape	41502E
DIE (HWS)		
	Round	414021
	Square	414022
	Rectangle	414023
	Oblong	414024
	O.D. Ground Special Shape	41402G
	EDM Required Special Shape	41402E

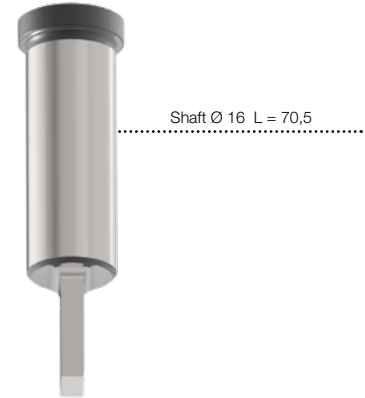

ADDITIONAL COSTS FOR PUNCHES




- TICN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm

ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole

PRIMA POWER

MTPi8-24; MTP5-24; MT8-24

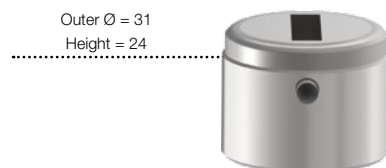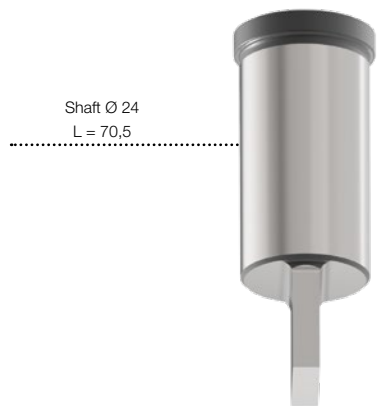

PART-NO.

PUNCH (H-PM®)		
	Round	413131
	Square	413132
	Rectangle	413133
	Oblong	413134
	O.D. Ground Special Shape	41313G
	EDM Required Special Shape	41313E

STRIPPER		
	Round	415131
	Square	415132
	Rectangle	415133
	Oblong	415134
	O.D. Ground Special Shape	41513G
	EDM Required Special Shape	41513E

DIE (HWS)		
	Round	414131
	Square	414132
	Rectangle	414133
	Oblong	414134
	O.D. Ground Special Shape	41413G
	EDM Required Special Shape	41413E

ADDITIONAL COSTS FOR PUNCHES

- TICN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm

ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole

PRIMA POWER

MT3Ri-31,75; MT3i-31,75

	PART-NO.
PUNCH (H-PM®)	
Round	413181
Square	413182
Rectangle	413183
Oblong	413184
O.D. Ground Special Shape	41318G
EDM Required Special Shape	41318E
STRIPPER	
Round	415181
Square	415182
Rectangle	415183
Oblong	415184
O.D. Ground Special Shape	41518G
EDM Required Special Shape	41518E
DIE (HWS)	
Round	414181
Square	414182
Rectangle	414183
Oblong	414184
O.D. Ground Special Shape	41418G
EDM Required Special Shape	41418E



ADDITIONAL COSTS FOR PUNCHES

- TICN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm

ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole

PRIMA POWER

MT20i-8



PART-NO.

PUNCH (H-PM®)		
	Round	413111
	Square	413112
	Rectangle	413113
	Oblong	413114
	O.D. Ground Special Shape	41311G
	EDM Required Special Shape	41311E

STRIPPER		
	Round	415111
	Square	415112
	Rectangle	415113
	Oblong	415114
	O.D. Ground Special Shape	41511G
	EDM Required Special Shape	41511E

DIE (HWS)		
	Round	414111
	Square	414112
	Rectangle	414113
	Oblong	414114
	O.D. Ground Special Shape	41411G
	EDM Required Special Shape	41411E

ADDITIONAL COSTS FOR PUNCHES

- TICN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm



ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole

PRIMA POWER

MT8Ri2-16 (VERSION 2)

	PART-NO.
PUNCH (H-PM®)	
Round	413151
Square	413152
Rectangle	413153
Oblong	413154
O.D. Ground Special Shape	41315G
EDM Required Special Shape	41315E
STRIPPER	
Round	415151
Square	415152
Rectangle	415153
Oblong	415154
O.D. Ground Special Shape	41515G
EDM Required Special Shape	41515E
DIE (HWS)	
Round	414151
Square	414152
Rectangle	414153
Oblong	414154
O.D. Ground Special Shape	41415G
EDM Required Special Shape	41415E



ADDITIONAL COSTS FOR PUNCHES

- TICN coating
- T-MAX coating
- A-MAX coating
- WT-shear
- DOWT-shear
- 2 PT-shear
- 4 PT-shear
- Cutting part under 1,00 mm

ADDITIONAL COSTS FOR DIES

- Reinforced version
- H-PM® Quality
- Additional pin hole














TECHNICAL INFORMATION

INFORMATION ABOUT OUR TOOLS FOR YOUR THICK TURRET SYSTEM












INDEX

O.D. Ground Special Shapes	page 14
EDM Required Special Shapes	page 15
PASS tool variety	page 16
Lifetime of tools regrind advice	page 17
PASS coating versions / draw-polishing	page 18
Die versions	page 19
Punches with different shear types	page 20
PASS back taper on punches	page 21
PASS corner radius on punches	page 22
PASS punches with reinforced shoulder	page 23

O.D. GROUND SPECIAL SHAPES

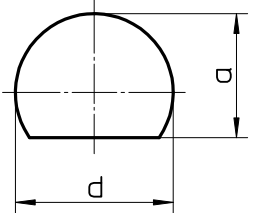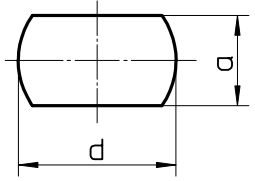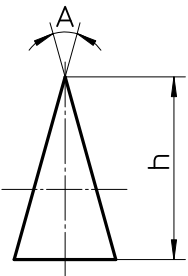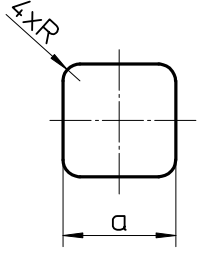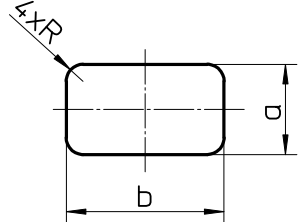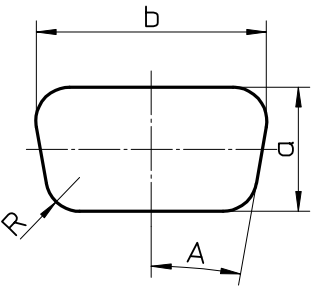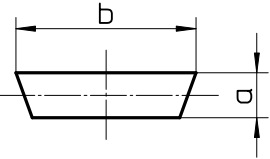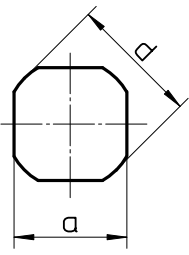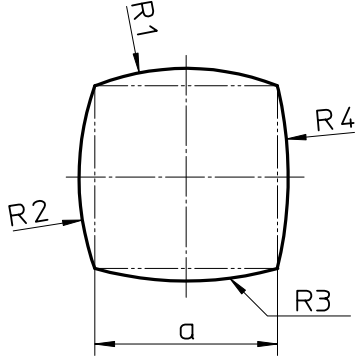 <p>G01</p>	 <p>G02</p>	 <p>G03</p>
 <p>G04</p>	 <p>G05</p>	 <p>G06</p>
 <p>G07</p>	 <p>G08</p>	 <p>G09</p>
 <p>G10</p>	 <p>G11</p>	

EDM REQUIRED SPECIAL SHAPES

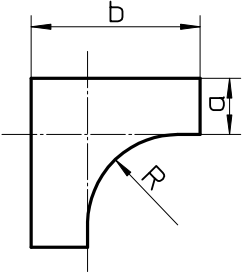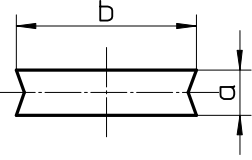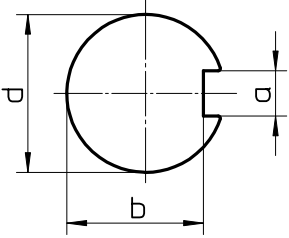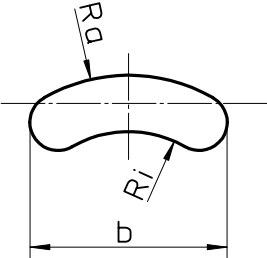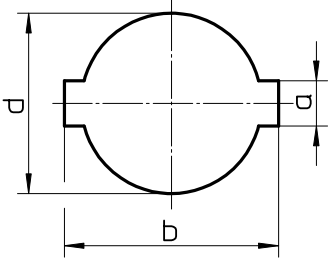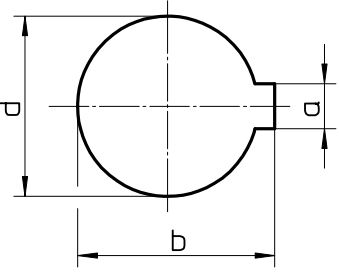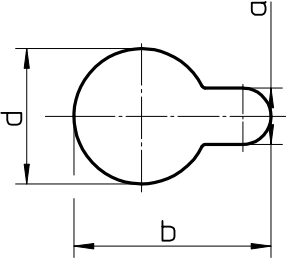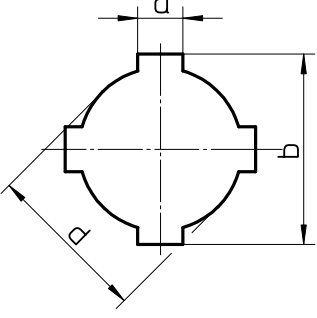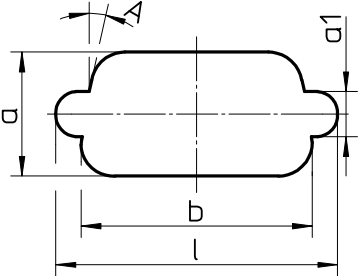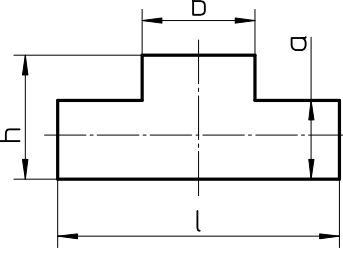 <p>E01</p>	 <p>E02</p>	 <p>E03</p>
 <p>E04</p>	 <p>E05</p>	 <p>E06</p>
 <p>E07</p>	 <p>E08</p>	 <p>E09</p>
 <p>E10</p>	 <p>E11</p>	

PASS TOOL VARIETY

HWS

HWS tools are made of a secondary hardened cold work steel with superior toughness. This type of steel is especially suitable for dies.

Advantages for customer:

- excellent cost in accordance to performance

H-PM®

H-PM® tools are produced with steel made on powder-metallurgical base with a high degree of purity.

This guarantees a segregational uniformed microstructure in the complete cross-section of the tool.

Advantage for customer:

- excellent cost in accordance to performance
- good stability for edges by increased toughness
- high tool lifetime due to the uniformed microstructure
- increased current hit-flex-capability; suitable as an excellent base for dies

X3-PM

The X3-PM tools are made of a high-end powder-metallurgical steel with the best possible performance characteristics for punches in the punching technology due to the best possible degree of purity.

The segregational uniformed microstructure with high vanadium concentration in the complete cross-section of the punch guarantees best possible wear resistance regarding tool lifetime.

Advantage for customer:

- best efficiency by multiple increase of the punch hit count
- best possible stability for cutting edges
- extremely high abrasion resistance
- utmost compressive strength

X8-PM

The X8-PM tools are made of a high-end powder-metallurgical steel the best possible performance characteristics for dies in the punching technology caused by best possible degree of purity.


The high ductility of the segregational uniformed microstructure guarantees best possible fatigue limit. This kind of steel is especially suitable for dies with risk-breakage in regard to special shapes.

Advantage for customer:

- best possible absorption of hit-flex stress; prevents fatigue breakage
- high abrasion resistance

LIFETIME OF TOOLS | REGRIND ADVICE

PASS punches and dies are made of high-end special steel in order to guarantee best lifetime of tools together with high robustness.

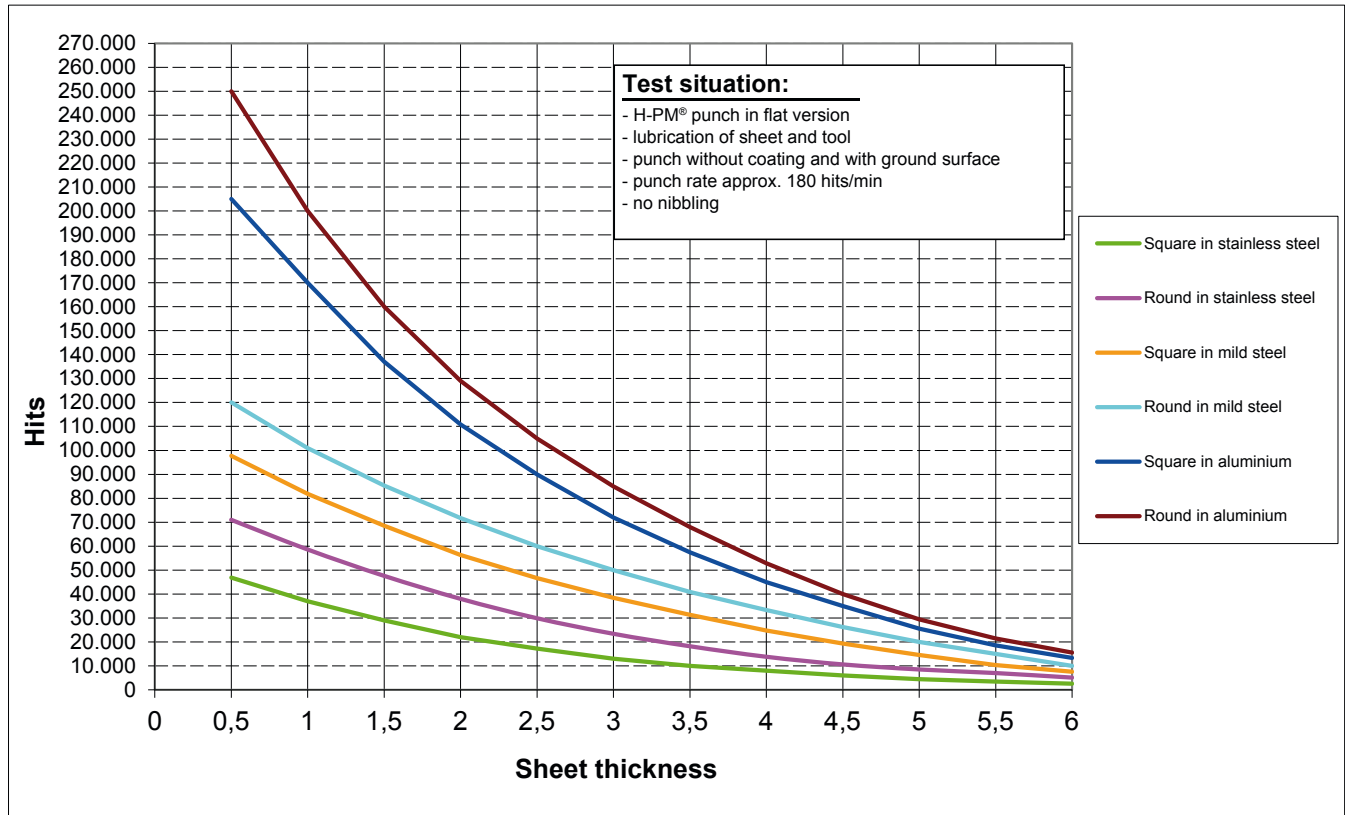

INFLUENCING FACTORS	FACTOR
Galvanised steel / stainless steel with foil / aluminium anodised	0,5 - 0,8
No sheet lubrication	0,4 - 0,6
Punch coating (TiCN for stainless steel / T-MAX for galvanised steel / A-MAX for aluminium)	2,0 - 4,0
PASS X3-PM punch	6,0 - 10,0
Nibbling	0,7 - 0,9
Notching	0,5 - 0,7
Shear	0,8 - 0,9
Punching rate > 300 hits / min.	0,8 - 0,9
Cutting part with EDM surface	0,4 - 0,8
Cutting part with polished surface	1,5 - 3,0
Cutting part smaller than 1,5x sheet thickness	0,6 - 0,8
Cutting part smaller than 1,0x sheet thickness	0,3 - 0,5
Using of a too small clearance	0,4 - 0,9

An average decrease of the tool life of 5 - 10% per regrind has to be taken in account for the first regrind.

PASS COATING VERSIONS / DRAW-POLISHING

TO REDUCE MATERIAL BUILD-UP

H-PM® tools are produced with steel made on powder-metallurgical base with a high degree of purity to fulfill the highest punching demands.

Furthermore we attach great importance to a high quality hardening process by repeated temporing and deep-freeze subsequently.

This process guarantees an extremely high hardness with an outstanding wear resistance of our punching tools.

Associated with modern production methods (grinding of the cutting edges with special grinding wheels) we can ensure that the wide range of different sheet qualities can be punched up to 1.600 N/mm² – no matter if it concerns mild alloyed aluminium, mild steel, stainless steel or spring band steel.


A high punch hardness as well as an excellent grinding surface are important in order to counteract the problem with edge build-up.

Tests show us that the well-known TiCN coating is a good coating to increase the lifetime (especially working with stainless steel). However, the problem of material buildup on the edges have not really been counteracted.

Built-up edges are known especially when working with


- galvanised steel
- aluminium

After specialized tests at PASS Tooling the below mentioned coatings turned out to be the most successful coatings:




TiCN

for working with
stainless steel



A-MAX

for dry processing with
aluminium sheet



T-MAX

for working with
galvanised sheet / zincor


We recommend draw-polished punch edges to increase tool lifetime and reduce material build up (prices on request):



DIE VERSIONS

SLUG-STOP AND SLUG-SNAP (AVOID THE BUILD-UP OF THE SLUGS)

SLUG-STOP (STANDARD)

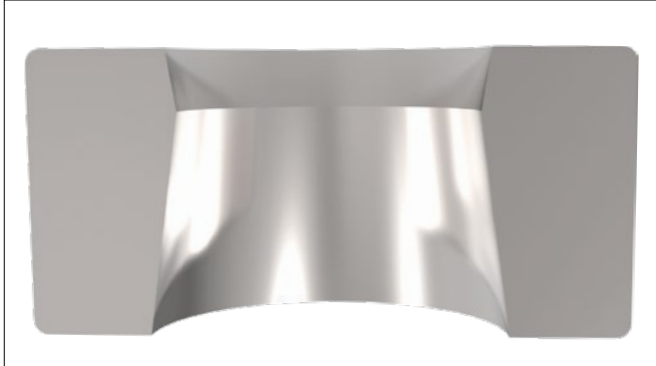

PASS dies for tooling system THICK TURRET are produced in standard version with a slug-stop version (without additional costs).


This means that the upper part of the cutting part is produced with a negative angle.

The slug will be held with the complete circumference in the die.

This is not recommended for:

- shapes smaller than 1,25 mm
- clearance smaller 0,1 mm

SLUG-SNAP (SPECIAL VERSION - ADDITIONAL COSTS)

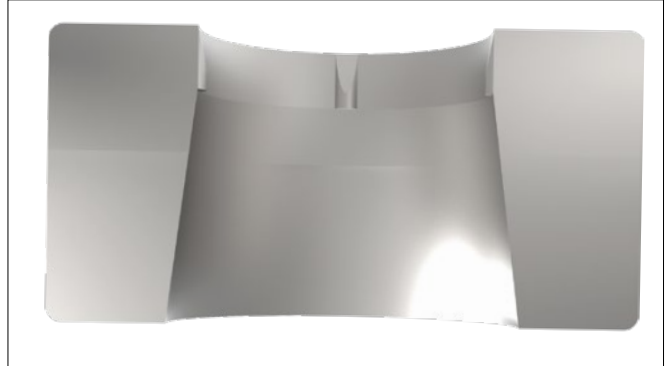

Alternatively we offer our slug-snap version (additional costs).

In this case special holding bolts are included in the die, clamping the slug positively (better than the slug-stop version).


The slug-snap version is also more convenient for shapes smaller than 1,25 mm and clearance smaller 0,1 mm.

PUNCHES WITH DIFFERENT SHEAR TYPES


WT




DOWT



2 PT



4 PT



DESCRIPTION

WT
Advantage easy regrindable

Disadvantage lateral forces

DOWT
Advantages easy regrindable
no lateral forces

Disadvantage only reasonable for big shapes

2 PT
Advantages no lateral forces
optimal die cutting

Disadvantages only reasonable for big and slim shapes
difficult to regrind

4 PT
Advantages no lateral forces
optimal die cutting
suitable for trimming


Disadvantages only reasonable for big shapes
difficult to regrind

PASS BACK TAPER ON PUNCHES

PASS punches are normally produced with back taper to reduce galling and premature punch wear.

However it should be mentioned that back taper is very important when punching materials such as stainless steel or very thick material to reduce galling and eliminate breakage of the tool corners and edges.


We recommend a line polished version for cutting parts, which have to be produced sink-eroded (special shape with internal shape, e.g. cross-form, U-form, etc.) and in high quality sheets.

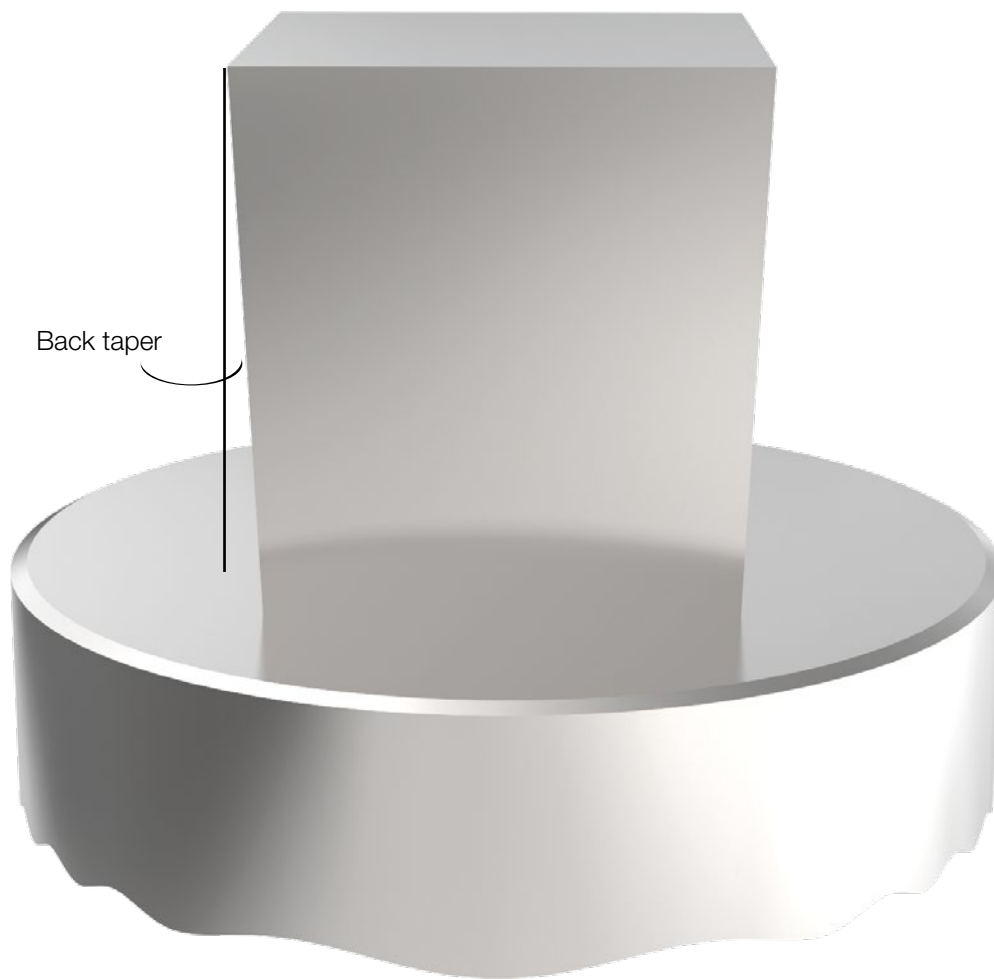

PASS CORNER RADIUS ON PUNCHES

PASS punches are automatically produced with corner radius $R = 0,15$ mm. This process increases the lifetime as the corner abrasive wear will be decreased considerably.


E.g.: square and triangle punch

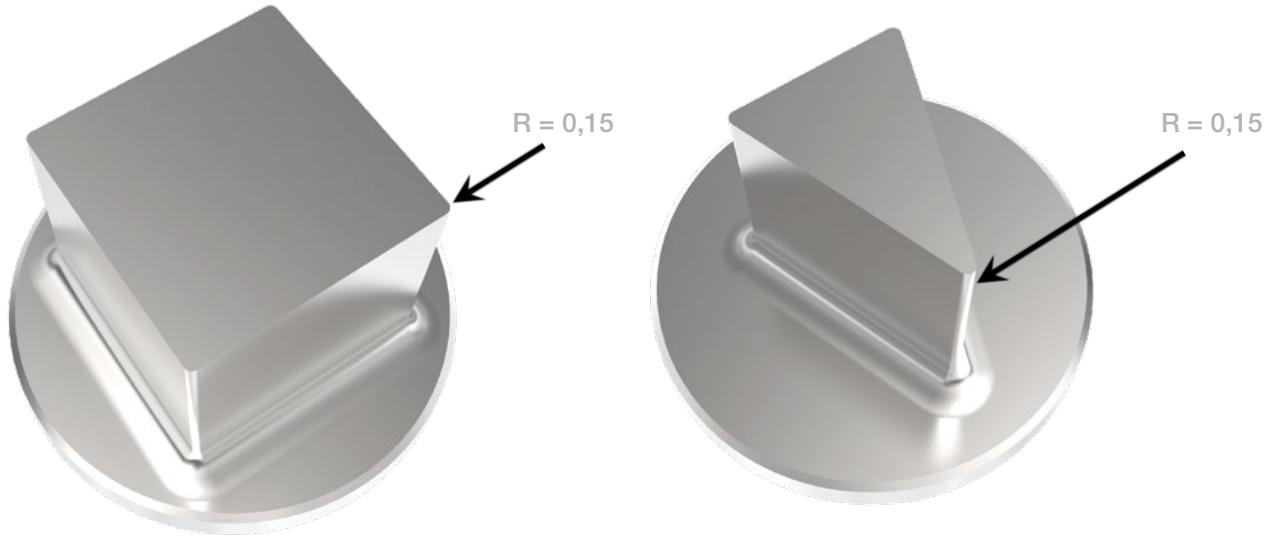

The corner radius can be changed on customer's request.

E.g.:

$R = 0,5$ mm instead of $R = 0,15$ mm for stainless steel in order to increase tool life.

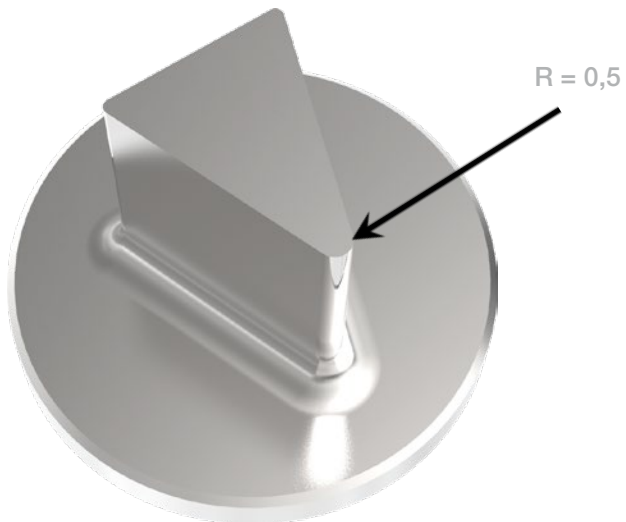


PASS PUNCHES WITH REINFORCED SHOULDER

All PASS punches are produced with a 4 mm reinforced shoulder as soon as the cutting section is required smaller than 4 mm.

This guarantees that you will get a tool with highest stability in order to punch also thicker and high-strength sheets.

However, the correct stripper size has to be selected in subject to machine type, tool design, sheet thickness (1), punching depth (2), stripper thickness (3) and stripper overlap (4).

It might be possible that it gets necessary to use a stripper with an appropriate big shape (width min. 4,5 mm) in order to get sure that the reinforced punch shoulder can immerse into the stripper.

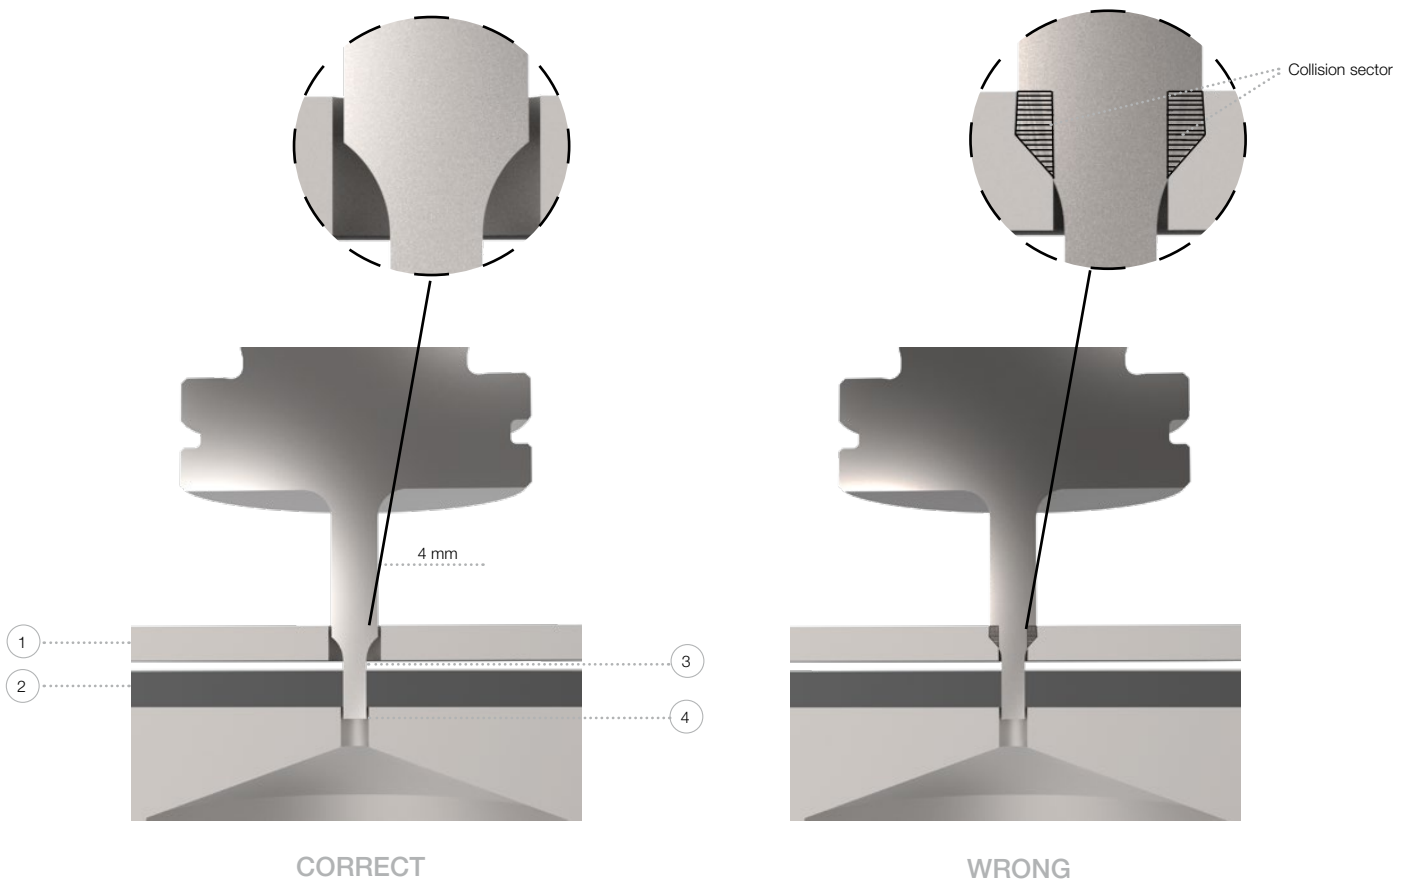

A large grid of graph paper for taking notes, consisting of 20 columns and 30 rows of small squares.

NOTES

A large grid of graph paper for taking notes, consisting of 20 columns and 40 rows of small squares.

A large grid of graph paper for taking notes, consisting of 20 columns and 30 rows of small squares.

SALVAGNINI | **THICK TURRET** | **TRUMPF**



5170 N 126th St
Butler, WI 53007 | USA

WEB: www.passtooling.com
EMAIL: sales@passtooling.com

PHONE: 262-307-2209