


Series: Blaze Specifications

Colors + Sizes	3"x12"	3"x12" Bullnose
GLACIER	1104966	1105207
MOON	1104971	1105212
DESERT	1104970	1105211
SKY	1104967	1105208
FOREST	1104969	1105210
OCEAN	1104968	1105209
BISCUIT	1106425	1106427
WARM	1106426	1106428

Colors shown may vary from actual product. Final selection should be made from actual product samples.

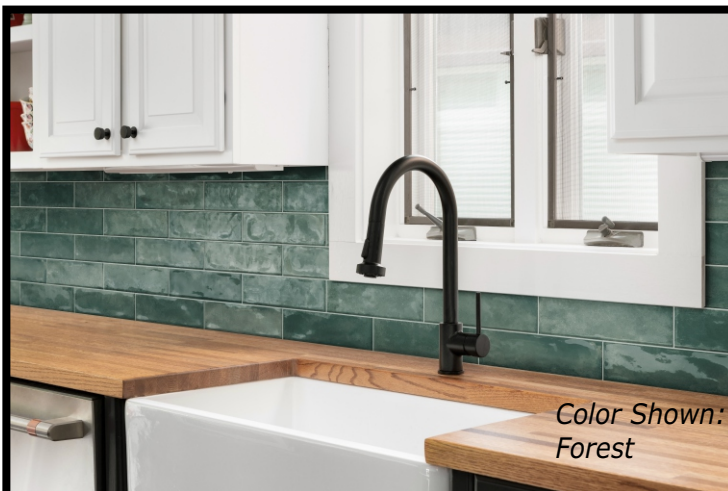

Specifications*

All field tile is sold as full cartons.
Mosaic, trims, liners and accessory
pieces are sold per piece.

Blaze 3" x 12" Glossy Porcelain Wall Tile

8 Colors

Shade V-3

3" x 12" Wall Tile - 15 s/f carton

3" x 12" Wall Tile - 60 pieces per carton

Square feet per piece 0.25
















Coordinating 3" x 12" bullnose

**sold per
piece**

*Note - Check with your sales representative for proper use and application of this product.

Series: Blaze Specifications

**This product meets or exceeds all standards described in ANSI A137.1.
Este producto cumple o excede todos los estandares de ANSI A137.1.**

	SPECS	TEST METHOD	INDUSTRY STANDARD	VALUES	
	WATER ABSORPTION	ASTM C373	≤0.5%	≤0.5%	
	SURFACE WEAR RESISTANCE	ANSI A137.1	Surface Wear-resistance properties of glazed vitreous and porcelain tiles.	ALL RESIDENTIAL / COMMERCIAL	
	CHEMICAL RESISTANCE	ASTM C650	A tile sample is placed in continuous contact with a variety of chemicals for 24 hours. Sample must show no visible defects.	NOT AFFECTED	
	D.C.O.F. AcuTest®	ANSI A326.3	INDOOR ≥0.42 WET	≥0.42 WET (MATTE SURFACES)	
			OUTDOOR >0.55 WET	>0.55 WET (2CM & GRIP)	
	STAIN RESISTANCE	ASTM C1378	Surfaces are exposed to staining agents for 24 hours followed by four cleaning procedures. Results are recorded post cleaning.	NOT AFFECTED	
	BREAKING STRENGTH GAUGED PORCELAIN 6MM	ASTM C1505	≥175 lbf	≥200 lbf	
	BREAKING STRENGTH	ASTM C648	≥275 lbf	≥300 lbf	
	BREAKING STRENGTH OUTDOOR 2CM	ASTM 1505	2000 lbf (10.9 kN)	≥2500 lbf	
	RESISTANCE TO FREEZE	ASTM C1026	A tile sample is subjected to repeated processes of freezing and thawing. Sample must show no visible defects.	RESISTANT	
	WARPAGE EDGE	ASTM C485	±0.40% or ±0.05 in (±1.8 mm)	± 0.40%	Rectified
	WARPAGE DIAGONAL	ASTM C485	±0.40% or ±0.07 in (±1.8 mm)	± 0.40%	Rectified
	WEDGING	ASTM C502	±0.25% or ±0.03 in (±0.8 mm)	± 0.25%	Rectified
	WARPAGE EDGE	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WARPAGE DIAGONAL	ASTM C485	±0.50% or ±0.07 in (±1.8 mm)	± 0.50%	Calibrated
	WEDGING	ASTM C502	±0.50% or ±0.08 in (±2.0 mm)	± 0.50%	Calibrated
	THICKNESS GAUGED PORCELAIN	ASTM C499	Range: ± 0.02 in	≤0.02 in	
	THICKNESS	ASTM C499	Range: ± 0.04 in	≤0.04 in	
	LENGTH / WIDTH VARIATION	ASTM C499	±0.25% or ±0.03 in (±0.8 mm)	±0.25%	

• Due to the inherent nature of fired porcelain tile, it is important to note that the coefficient of friction may vary within and between product runs.