

Series: Brickson Specifications



The Mist glossy wall tile surface is intentionally designed to be full of highs and lows. The surface is purposely rustic and granular, giving each piece a handcrafted feel. What some may see as an imperfection is actually the signature style of this seven color wall tile series. Shading will vary widely from tile to tile, creating depth and dimension which only adds to its rustic charm. If your looking for something with unmistakable character you should consider this collection for your next wall tile project.

Specifications*

All field tile, is sold as full cartons.
Mosaic, trims, liners and accessory

Mist Handcrafted Porcelain Wall Tile

7 Colors

Shade V-4 High Random Shading

2" x 8" Nominal

Irregular Glossy Finish

2" x 8" - 4.43 s/f carton

2" x 8" 36 pieces per carton

Installation of 2" x 8" Wall Tile: 1/16" joint recommended (When rectangular size is installed in a staggered brick-joint pattern, overlap should not exceed 33%.)

*Note - Check with your sales representative for proper use and application of this product.

+Estimated delivery time of 2-3 weeks.

Glossy 2" x 8" Wall Tile




LG70 White



LG71 Shell



LG72 Beige

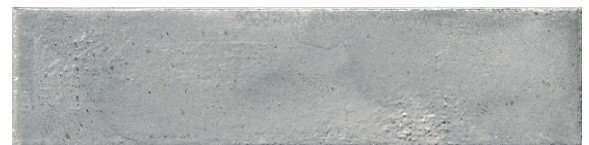

LG73 Blue



LG74 Green



LG75 Brown



LG76 Black

Series: Mist Specifications

MIST 2x8

PORCELAIN TILES

PRODUCT INFORMATION

Product	Finish	Rectified	Unit	Work Size	Thick	Faces	Sq. Ft/ Carton	Pieces/ Carton
 Wall 2"x8"	Glossy	No	SF	2.25" x 8" 5.65 cm x 20.26 cm	9.5 mm	46	4.43	36

USAGE RECOMMENDATION

Walls & Countertops	Target DCOF	Residential	Commercial
Indoor Walls / Backsplash / Shower walls (Wet)	N/A	✓	✓
Indoor Walls (Dry)	N/A	✓	✓
Outdoor Walls (Covered)	N/A	✓	✓
Outdoor Facades (Uncovered)	N/A	✓	✓
Countertops	N/A	✓	✓

Floors & Traffic Areas	Target DCOF	Residential	Commercial
Indoor Floors Level (Wet / Shower Floors)	≥ 0.42	—	—
Indoor Floors Level (Dry)	N/A	✓	✓
Outdoor Floors Level (Covered)	N/A	—	—
Outdoor Floors Level (Uncovered)	≥ 0.60	—	—
Indoor & Outdoor Ramps / Inclines	≥ 0.65	—	—

Pools & Water Features	Suitable
Pool Waterline	✓
Interior Pool Walls	✓
Pool Floors / Submerged Steps	—
Pool Deck	—
Hot Tub Walls	✓
Hot Tub Floors / Steps	—
Hot Tub Deck	—
Sauna Walls	✓
Sauna Floors	—

Specialty Applications	Suitable
Fireplace Surround	✓
Fireplace Hearth	—
Commercial Kitchen Walls	✓
Commercial Kitchen Floors	—

A DCOF value of ≥ 0.42 is the standard for level interior spaces expected to be walked upon when wet, as stated in ANSI A137.1-A326.3.

INSTALLATION AND CARE

Grout Joint Recommendation 1/16"
Shade Variation V4

Professional tile installation is recommended. For complete installation instructions consult the TCNA Handbook for Ceramic, Glass, and Stone Tile Installation. Follow the grout manufacturer instructions for the complete removal of grout and construction residue from initial installation.

The factory recommends using a cloth with water and a neutral cleaner (soap-less) or a general household cleaner for tiles cleaning.

PERFORMANCE CHARACTERISTICS

	ASTM #	Result
Water Absorption	C373	≤ 0.5%
Breaking Strength	C648	≥ 275 lbf
DCOF WET	ANSI A137.1 ANSI A326.3	< 0.42
Scratch Hardness	MOHS	6
Frost Resistance	C1026	Yes
Stain Resistance	C1378	Resistant
Chemical Resistance	C650	Resistant

SUSTAINABILITY

 Mist ceramic and porcelain tiles are low-emitting materials with zero emission of volatile organic compounds (VOC).

 Recycled Content: 4.7% Pre-consumer 1.5% Post-consumer

QUALITY CARE

 Standard quality tiles meet ISO 13006, ANSI A137.1 standards.

 Mist porcelain tiles are NOT flammable.