

Retaining walls, sound and road barriers

STEP lecture E23
C. Short
Consulting Engineer

Objective

Design and detailing of retaining walls, sound and road barriers of structural timber in compliance with EC5 Design of Timber Structures.

Summary

This lecture covers road division barriers, acoustic attenuation barriers and earth retaining walls; three separate but related subjects requiring the design of essentially vertical elements but with differing environmental and functional requirements.

The early history of these structural types are described and the basis of design is developed. The ultimate and serviceability limit states are identified and design values of actions and resulting load cases are developed. Methods of verification for design conditions are considered for members in relation to sawn timber and round pole sections.

Durability, structural detailing and control in relation to retaining walls and barriers are discussed.

Retaining walls

Timber retaining walls are of two main forms, either pile and board or crib.

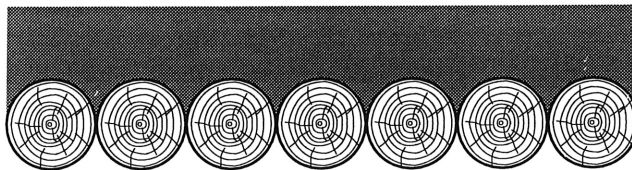


Figure 1 Simple contiguous pole wall (in plan showing retained material).

Pile and board

The pile and board style is perhaps the oldest form of retaining wall and may have started as a simple row of poles or piles driven into the ground to form a contiguous wall of vertical elements. Stability was provided by the depth of penetration into the soil by the mobilisation of passive resistance in the sub soils.

A later development spaced the vertical elements and filled the gap with horizontal elements of smaller cross section. In this arrangement the earth behind the wall was retained by the horizontal elements spanning onto vertical elements which are driven into the ground to mobilise the passive resistance of the sub soils.

The pole (or pile) and board style of retaining wall is a common sight today in use as temporary works on construction sites. The round small section elements are replaced by sawn boards which span horizontally onto the vertical pile. In some instances the pile is not driven deep into the ground but braced with a raking or flying shore.

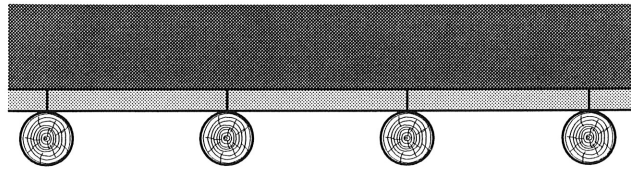


Figure 2 Plan of spaced pole and board wall.

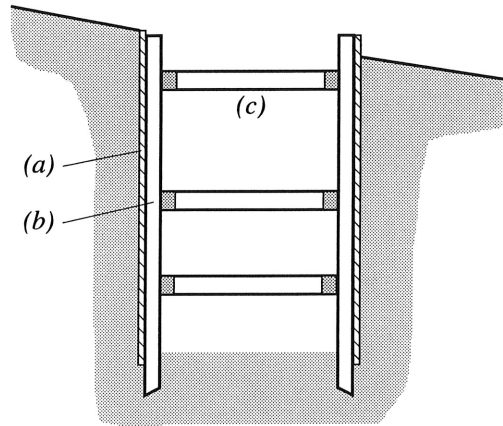


Figure 3 Trench showing a braced pile and board wall (note reduced penetration).
(a) boards, (b) pile, (c) bracing.

The design of walls retaining soils or granular material would start with the assessment of the active pressures on the wall. In some cases full slope stability must be considered. The designer can then concentrate on the design of the timber horizontal and vertical elements.

Durability is the first consideration. The species selected requires consideration of the expected life of the structure and the ability of the timber to be driven through the expected soil type. It is possible for different timber species to be selected for the pile and the board. The pile must resist the impact forces during installation. In some cases steel shoes may be fitted to the toe of the pile and in most cases a steel cap is placed on the head of the pile for protection during the driving process. The durability period would be important for both pile and board.

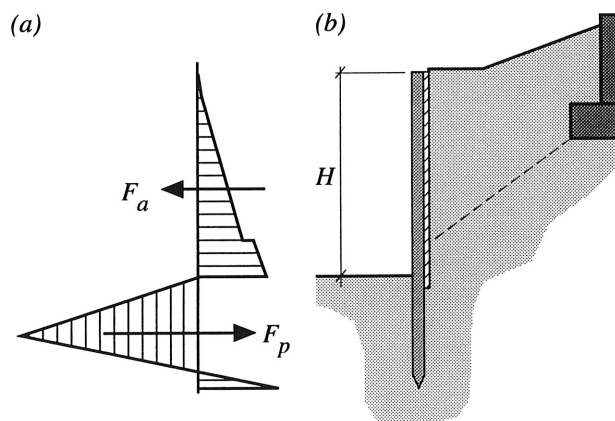


Figure 4 Pressure diagram and loads for a retaining wall. F_a = active force and F_p = passive force.

The active soil pressure behind the wall varies with depth. In many cases the simple earth and hydrostatic pressure is increased by additional loads from surcharge due to vehicle loads, soil slopes rising from the top of the wall and building foundations close to the back of the wall. Careful analysis is required for the assessment of the imposed actions on the timber elements.

Given the active earth pressure distribution behind the wall the boards can be designed using simple static considerations.

Friction between the board and the soil behind the board can induce a vertical force in the boards and this should be checked to ensure adequate bearing capacity on the edges of the board.

It should be verified that the stresses induced in the board by bending, shear, bearing and compressive actions are less than or equal to the strength of the timber modified by the partial material factors for the service class (Class 3 high moisture content) and the load duration classes of each load combination.

The piles support the loads transferred by the boards and may be assumed to behave as a simple vertical cantilever.

Design example

A retaining wall is required for a retained height H of 3,00 m and the backfill bulk density, γ , is 18,0 kN/m³, with an internal angle of friction α of 35°. There is a transient surcharge of 5,00 kN/m² to be allowed for at the top of the wall, and the Rankine coefficient k_a is $(1-\sin\alpha)/(1+\sin\alpha) = 0,27$.

prEN 338: 1991

Strength Class is C24.

Board

Earth pressures at the lowest board level are;

$$\text{Backfill} = k_a \gamma H = 14,6 \text{ kN/m}^2$$

$$\text{Surcharge} = k_a 5 = 1,35 \text{ kN/m}^2$$

	F_i	γ	γF_i
	kN		kN
Backfill on board F_1	4,28	1,35	5,78
Surcharge on board F_2	0,40	1,50	0,60
Force on board	4,68		6,38

Table 1 Maximum characteristic and design forces on board with $b = 225 \text{ mm}$.

EC5: Part 1-1: 2.3.3.1

EC5: Part 1-1: 2.3.3.1

γ_G for unfavourable effect of permanent action is 1,35

γ_Q for unfavourable effect of variable action is 1,5

Pile spacing s is 1,30 m; Assume simple supports

Trial section

$$\text{Breadth of board} \quad b = 225 \text{ mm}$$

$$\text{Depth of board} \quad h = 50 \text{ mm}$$

$$\text{Area} \quad A = 11200 \text{ mm}^2$$

$$\text{Second moment of area} \quad I_{zz} = 2,34 \cdot 10^6 \text{ mm}^4$$

EC5: Part 1-1: 3.1.5	Section modulus	$Z_{zz} = 93,8 \cdot 10^3 \text{ mm}^3$
EC5: Part 1-1: 3.1.6	Service Class 3.	
EC5: Part 1-1: 3.2.4	Load duration class is <i>Long-term</i>	
	The factor for moisture content and duration of the load duration	$k_{mod} = 0,55$
	The solid timber is assumed to be normally prepared before installation by drying to near equilibrium moisture content.	
EC5: Part 1-1: 3.2.2	Depth factor	$k_h = 1,25$
	Load on board	$F_d = 6,38 \text{ kN}$ (Table 1)
	Design shear force	$V_d = 3,2 \text{ kN}$
	Design moment	$M_{0,d} = F_d s / 8 = 1,04 \text{ kNm}$
EC5: Part 1-1: 2.3.3.2		$\gamma_M = 1,3$

EC5: Part 1-1: 2.4 **Durability**
The timber would be selected from the more durable species, refer to STEP lectures A14 and A15 or subject to preservation treatment before installation and detailed to insure long life in service.

EC5: Part 1-1: 5.1.6	Ultimate limit state	
	Bending only about one axis	$M_{0,d} = 1,04 \text{ kNm}$
		$\sigma_{m,d} = M_{0,d} / W = 11,1 \text{ N/mm}^2$
EC5: Part 1-1: 2.2.3.2		$f_{m,d} = k_{mod} f_{m,k} k_h / \gamma_M = 12,7 \text{ N/mm}^2$
		$\sigma_{m,d} / f_{m,d} = 0,87 < 1$
EC5: Part 1-1: 5.2.2	Board stability is provided by the lateral pressure exerted by adjacent boards as a result of frictional transfer of vertical loads to the board edges.	
EC5: Part 1-1: 5.1.7		$\tau_d = 1,5 V_d / A = 0,43 \text{ N/mm}^2$
		$f_{v,d} = f_{v,k} k_{mod} / \gamma_M = 1,06 \text{ N/mm}^2$
		$\tau_d / f_{v,d} = 0,40 < 1$

Pile

Earth pressure

Backfill pressure at base of wall is $14,6 \text{ kN/m}^2$; Surcharge at the base of wall is $1,35 \text{ kN/m}^2$

	$F \text{ (kN)}$	γ	$\gamma F \text{ (kN)}$	$X \text{ (m)}$	$M \text{ (kNm)}$
Backfill on pile	28,5	1,35	38,5	1	38,5
Surcharge on pile	5,28	1,50	7,93	1,5	11,9
Earth force on pile	33,8		46,4		50,4

Table 2 Forces on pile.

Pile spacing $s = 1,3 \text{ m}$; $H = 3,00 \text{ m}$; assume pile is a simple cantilever.

Trial section

Breadth of pile	$b = 300 \text{ mm}$
Depth of pile	$h = 350 \text{ mm}$
Area	$A = 105000 \text{ mm}^2$
Second moment of area	$I = 1,07 \cdot 10^9 \text{ mm}^4$
Section modulus	$W = 6,13 \cdot 10^6 \text{ mm}^3$

EC5: Part 1-1: 3.1.5 Service Class 3.
EC5: Part 1-1: 3.1.6 Load duration class *Long-term*

EC5: Part 1-1: 3.2.4

The factor for moisture content and duration of the load

$$k_{mod} = 0,55$$

EC5: Part 1-1: 3.2.2

Depth factor

$$k_h = 1,0$$

Load on pile

$$F_d = 46,4 \text{ kN}$$

Shear force

$$V_d = 46,4 \text{ kN}$$

Moment

$$M_{0,d} = 50,4 \text{ kNm}$$

EC5: Part 1-1: 2.3.3.2

$$\gamma_M = 1,3$$

Ultimate limit state

EC5: Part 1-1: 5.1.6

Bending only about one axis $M_{0,d} = 50,4 \text{ kNm}$

$$\sigma_{m,d} = M_{0,d} / W = 8,23 \text{ N/mm}^2$$

EC5: Part 1-1: 2.2.3.2

$$f_{m,d} = k_{mod} f_{m,k} k_h / \gamma_M = 10,1 \text{ N/mm}^2$$

$$\sigma_{m,d} / f_{m,d} = 0,81 < 1$$

EC5: Part 1-1: 5.2.2

Lateral stability is provided by the bearing friction between boards and pile in the Z direction but a check should be applied for the Y direction.

EC5: Part 1-1: 5.1.7

$$\tau_d = 1,5 V_d / A = 0,66 \text{ N/mm}^2$$

$$f_{v,d} = f_{v,k} k_{mod} / \gamma_M = 1,06 \text{ N/mm}^2$$

$$\tau_d / f_{v,d} = 0,62 < 1$$

Crib Walls

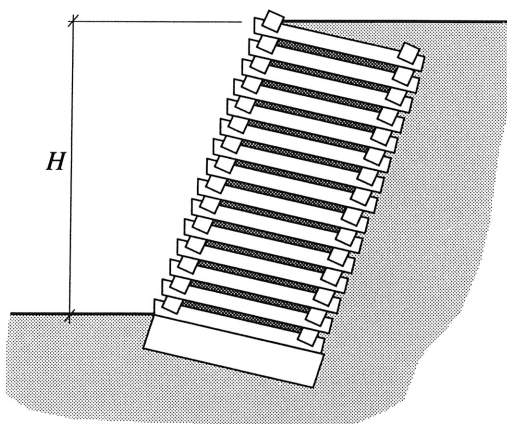


Figure 5 Typical crib retaining wall.

The crib wall is made from a frame work of simple elements of headers and stretchers forming a collection of cells filled with well graded crushed rock or natural stone materials. The headers and stretchers lock into each other with simple halving joints, providing tensile restraint to the internal forces from the mass of rock material which would otherwise redistribute to its natural angle of repose.

Some loading derives from mass of stone bearing down on the embedded timber but the individual timber elements are designed as tensile members as described in lectures B2 and B12 with appropriate adjustments for factors derived for Service Class 3.

Traffic barriers

Traffic barriers are typically used to separate lanes of traffic from other vehicles heading in the opposite direction or for separation of traffic from pedestrian

areas. The structural form of such barriers is a profiled, functionally continuous steel rail set at typical car bumper height on timber or steel vertical elements driven or set into the ground. The height chosen in transportation guidelines (Transport Research Laboratory, 1991) to reduce the chance of the vehicle overturning on impact.

The barriers are not designed to stop vehicles instantly as they cross the barrier but slow the vehicle to a stop by absorbing the kinetic energy of the impacting vehicle, or deflecting its path back into the correct direction.

The forces involved in stopping a speeding vehicle vary with the starting velocity and the deceleration rate imposed. If the structure is too stiff the deceleration rate is too high and the driver of the vehicle would be damaged. However, if the structure is not stiff enough the rate of slowing would be too low and the car would pass into the area being protected by the barrier.

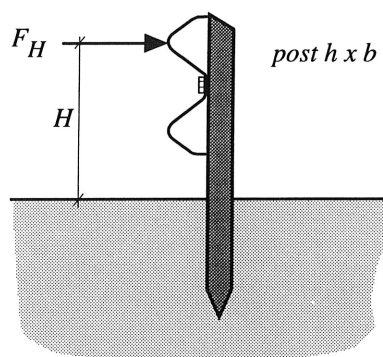


Figure 6 Traffic barrier.

Based upon test information one design publication (Transport Research Laboratory, 1991) requires the post to be designed such that the following condition is satisfied:

"Load applied 600 mm above paving or finished ground level whichever is higher such that ... is acceptable if bending moment of 9000 Nm is sustained without deflection exceeding 150 mm".

The design case relates to accidental damage to the post, and therefore factors which allow for accidental actions and instantaneous stress levels should be used in the verification calculations.

The supports may be designed as cantilevers subjected to a design moment of 9 kNm and an appropriate shear force. Both actions are coincident at a point near to the point where the vertical support enters the ground or the foundation concrete.

Land division barriers, fences and acoustic barriers

Fencing with a variety of infill rail and panel arrangements are designed in a similar way to the Acoustic Barriers described below. The infill panel weight is generally negligible and the predominant action for consideration is that derived from the wind loading.

Acoustic barriers are erected between areas of high noise levels and areas which are to be protected from such noises. They are required on the boundaries of airport taxiways, aircraft test centres, motorways, and noisy industrial sites.

The barriers are designed to either deflect upwards or absorb inwards the energy waves from the noise source. In each case the timber supports are vertical elements cast into concrete foundations set in the sub soil. The actions to be catered for derive from the weight of the absorbing material in the barrier or the deflecting vanes, and the wind force on the projected area of the barrier. In general the weight of the absorbing material is transmitted directly to the sub soil via a strip foundation and the material stability is maintained by internal ties balancing the tension forces generated.

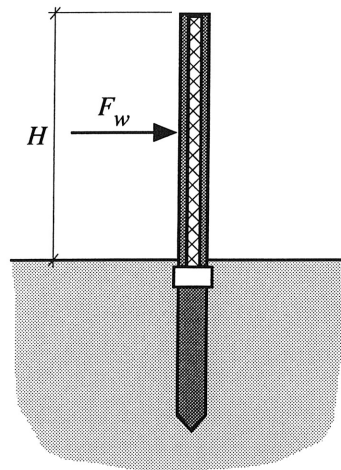


Figure 7 Typical acoustic barrier.

The design of the vertical cantilever elements in the acoustic barrier is therefore limited to consideration of the self weight of the containing frame, deflecting vanes if present and the wind force on the barrier.

National Codes of practice (BS 6399, 1995 and Building Regulations, 1991) are available until the Euronorm dealing with Actions is published. The forces generated are proportional to the square of the design velocity after adjustments are made for roughness of the terrain, height and proportions of the barrier, and the design life of the barrier. The resulting pressure from the wind is expressed in kN/m^2 on the projection of the barrier profile onto a vertical plane.

From the pressure the force vector can be derived and with it the design bending moment and coincident shear force. The vertical timber member can then be designed using EC5 methodology.

The overall stability of the barrier and its foundation should be verified to ensure adequate factors of safety against overturning, and sliding.

References

Transport Research Laboratory (1991). Highway Construction Details: Part 3: Detail PTE10 Test Procedure for 125 x 90 'Z' section steel and 150 x 150 Timber posts. Her Majesty's Stationery Office, United Kingdom.

BS 6399 (1995). Loading for Buildings, Part 2, Code practice for Wind Loading, British Standards Institution, London, United Kingdom.

Building Regulations (1991). Part A, Wind Speed Map, Published by Department of the Environment, Dublin, Ireland.