



**WORLD'S  
STRONGEST  
BOND™**



# **PRODUCT CATALOG**

**THOMAS FAZEKAS**

**DIRECTOR OF SALES & BUSINESS DEVELOPMENT CANADA**

[tom@jbweld.com](mailto:tom@jbweld.com) | 248-701-5712 (Cell)




# OVER 50 YEARS OF STRENGTH.

Whether you have an important home repair, a broken part that's hard to replace or need to finish-off a one-of-a-kind creation, J-B Weld has you covered. We're sold in over 70,000 retail stores, from hardware and automotive to home, farm, craft and more. Founded in Texas in 1969, J-B Weld is the original "tougher than steel" cold weld epoxy. But we've grown and innovated to offer a complete range of strongest-in-class products to help pros and DIYers of all skill levels confidently pull off projects both big and small in their homes, garage and beyond. J-B Weld, World's Strongest Bond.™





# TWIN TUBES

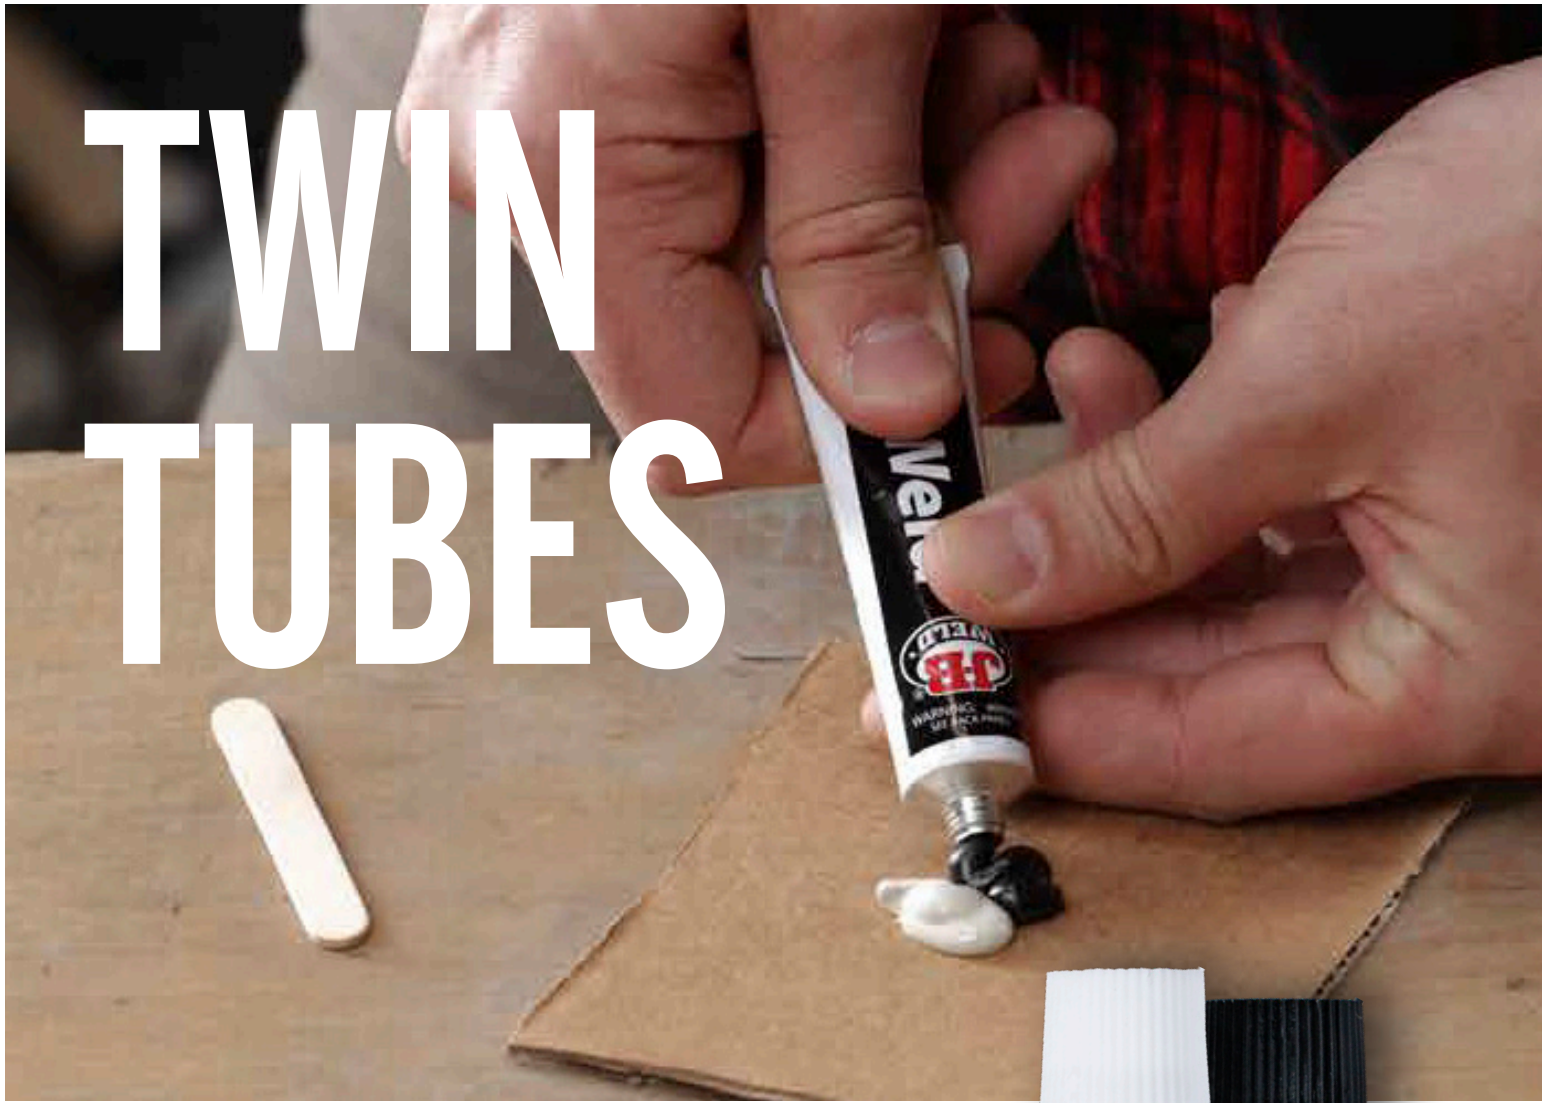

Our Twin Tubes are what started it all. These two-part epoxies are some of our most versatile products. With a paste-like consistency, Twin Tubes are great at filling gaps and cracks. And once cured, they create a permanent bond and can be sanded, drilled, tapped, shaped and painted.

- OUR ORIGINAL, STRONGEST EPOXIES
- BONDING AND GAP FILLING
- MOST VERSATILE



To see our Twin Tubes in action,  
visit [jbweld.com/our-videos](http://jbweld.com/our-videos)



# TWIN TUBES PRODUCT GUIDE



	Product Attributes						Metals				Plastics			Other Materials				
	Strength	Set Time	Cure Time	Dry Color	Max Temp	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Flexible Plastic*	Wood	Stone/Concrete	Fiberglass	Glass	Ceramic
<b>TWIN TUBES</b>																		
<b>J-B Weld</b>	5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	550° F	Best	Better	Best	Best	Best	Good	Good		Better	Best	Better		Better
<b>KwikWeld</b>	3127 PSI	6 min	4-6 hrs	Dark Grey	250° F	Good	Good	Good	Good	Good	Good	Good		Good	Better	Better		Good
<b>MarineWeld</b>	5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	550° F	Better	Best	Better	Better	Better	Better	Better		Better	Better	Best		Better
<b>ClearWeld</b>	3900 PSI	5 min	1 hr	Clear	200° F		Good	Good	Good	Good	Best	Best	Better	Best	Good	Good	Best	Best

\*Not polypropylene or polyethylene



J-B Weld  
8265SCAN/8281CAN



KwikWeld  
8276CAN/8271CAN



MarineWeld  
8272CAN



ClearWeld  
50240CAN



# TWIN TUBES



## J-B Weld® 2 oz

J-B Weld is The Original Cold Weld™ two-part epoxy system that provides strong, lasting adhesion and gap-filling to metal and other surfaces.

**Strength:** 5020 PSI  
**Set time:** 4-6 hours  
**Cure time:** 15-24 hours  
**Cure color:** Dark Grey

Part No.	Description
8265SCAN	2 oz

### Great for:

- All metals
- Stone/Concrete
- Fiberglass

### Top Attributes:

- J-B Weld's strongest epoxy
- 550° F temperature resistance
- Fuel resistant

### Good for:

- Rigid plastic
- Wood
- Ceramic

### Primary Applications:

High-strength repairs and crafts, along with bonding and gap filling on metals, concrete and other surfaces.



## J-B Weld® 10 oz

J-B Weld 10oz is The Original Cold Weld™ in a pro-size kit.

**Strength:** 5020 PSI  
**Set time:** 4-6 hours  
**Cure time:** 15-24 hours  
**Cure color:** Dark Grey

Part No.	Description
8281CAN	10 oz

### Great for:

- All metals
- Stone/Concrete
- Fiberglass

### Top Attributes:

- J-B Weld's strongest epoxy
- 550° F temperature resistance
- Fuel resistant

### Good for:

- Rigid plastic
- Wood
- Ceramic

### Primary Applications:

High-strength repairs and crafts, along with bonding and gap filling on metals, concrete and other surfaces.



## KwikWeld® 2 oz

KwikWeld is the fast-setting version of The Original J-B Weld two-part epoxy system.

**Strength:** 3127 PSI  
**Set time:** 6 minutes  
**Cure time:** 4-6 hours  
**Cure color:** Dark Grey

Part No.	Description
8276CAN	2 oz

### Great for:

- Most metals
- Stone/Concrete
- Fiberglass

### Top Attributes:

- Fast 6 min set time
- Strong bond on most surfaces

### Good for:

- Rigid plastic
- Wood
- Ceramic

### Primary Applications:

Fast bonding and gap-filling projects on metal and other substrates.

# TWIN TUBES

**KwikWeld® 10 oz**

KwikWeld 10oz is the fast-setting version of J-B Weld in a pro-size kit.

**Strength:** 3127 PSI

**Set time:** 6 minutes

**Cure time:** 4-6 hours

**Cure color:** Dark Grey

Part No.	Description
8271CAN	10 oz

**Great for:**

- Most metals
- Stone/Concrete
- Fiberglass

**Top Attributes:**

- Fast 6 min set time
- Strong bond on most surfaces

**Good for:**

- Rigid plastic
- Wood
- Ceramic

### Primary Applications:

**Primary Applications:**  
Fast bonding and gap-filling projects on metal and other substrates.

**MarineWeld® 2 oz**

MarineWeld is a specially formulated two-part epoxy system that provides strong, lasting repairs for boats and other marine equipment.

**Strength:** 5020 PSI

**Set time:** 4-6 hours

**Cure time:** 16-24 hours

**Cure color:** Dark Grey

Part No.	Description
8272CAN	2 oz

**Great for:**

- Aluminum
- Other metals
- Fiberglass

**Top Attributes:**

- Waterproof
- High bonding strength

**Good for:**

- Rigid plastic
- Wood

### Primary Applications:

Repairs on boats, pools, plumbing, and other marine equipment.



**ClearWeld® 8 oz**

ClearWeld is a quick-setting epoxy adhesive that cures clear and provides a strong bond to most surfaces.

**Strength:** 3900 PSI

**Set time:** 5 minutes

**Cure time:** 1 hour

**Cure color:** Clear

Part No.	Description
50240CAN	8 oz

**Great for:**

- Glass
- Tile
- Rigid plastic

**Top Attributes:**

- Cures clear
- Fast 5 min set time
- High bonding strength

**Good for:**

- Ceramic
- Wood
- Most metals

### Primary Applications:

**Primary Applications:**  
Quick-cure repairs and craft projects, along with bonding on plastic, glass and other surfaces.



# SYRINGES



J-B Weld Syringes deliver high-strength bonding in an easy-to-use applicator that dispenses the two-part adhesive in a precise 1-to-1 ratio. For convenient mixing, each product comes with a tray and stick. No other tools are necessary. Syringes are ideal for bonding and gap-filling. After curing, they can be sanded and painted.

- HIGH STRENGTH, TWO-COMPONENT ADHESIVES
- PRECISE 1-TO-1 RATIO
- EASY AND CONVENIENT TO MIX



To see our Syringes in action,  
visit [jbweld.com/our-videos](http://jbweld.com/our-videos)



# SYRINGES PRODUCT GUIDE



SYRINGES	Product Attributes						Metals				Plastics			Other Materials				
	Strength	Set Time	Cure Time	Dry Color	Max Temp	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Flexible Plastic*	Wood	Stone/Concrete	Fiberglass	Glass	Ceramic
ClearWeld	3900 PSI	5 min	1 hour	Clear	250° F		Better	Better	Better	Better	Better	Better	Better	Better	Better	Good	Best	Better
PlasticBonder	3770 PSI	15 min	30 min	Tan/Black	250° F		Good	Good	Good	Good	Best	Best	Best	Good	Good	Good		Good
J-B Weld	5020 PSI	4-6 hrs	15-24 hrs	Dark Grey	550° F	Best	Best	Best	Best	Best	Good	Good		Better	Best	Best		Best
KwikWeld	3127 PSI	6 min	4-6 hrs	Dark Grey	250° F	Good	Better	Better	Better	Better	Good	Good		Better	Better	Better		Better
PlasticWeld	3900 PSI	5 min	1 hour	Clear	250° F		Good	Good	Good	Good	Best	Best	Better	Good	Better	Good	Better	Good
MarineWeld	2350 PSI	5 min	1 hour	White	250° F		Good	Good	Good	Good	Better	Better	Best	Better	Good	Better		Good
MinuteWeld	2300 PSI	1 min	1 hour	Clear	250° F		Good	Good	Good	Good	Good	Good	Good	Good	Better	Good	Good	Good
HighHeat	5020 PSI	4-6 Hour	24 hrs	Dark Grey	450° F	Better	Better	Better	Better	Better	Good	Good			Better	Better		Better
WoodWeld	3770 PSI	15 min	30 min	Tan	250° F		Good	Good	Good	Good	Good	Good	Good	Best	Good	Good		Good

\*Not polypropylene or polyethylene



ClearWeld  
50112CAN/50114CAN



Tan PlasticBonder  
50133CAN



Black PlasticBonder  
50139CAN



J-B Weld  
50165CAN



KwikWeld  
50176CAN



PlasticWeld  
50132CAN



MarineWeld  
50172CAN



MinuteWeld  
50101CAN



HighHeat  
50197CAN



WoodWeld  
50151CAN



# SYRINGES



## ClearWeld 25 mL

ClearWeld is a clear-curing epoxy adhesive that sets quickly and provides strong adhesion.

**Strength:** 3900 PSI

**Set time:** 5 min

**Cure time:** 1 hour

**Cure color:** Clear

Part No.	Description
50112CAN	25 mL

### Great for:

- Glass
- Tile
- Rigid plastics

### Top Attributes:

- Cures clear
- High strength
- Quick 5 min set time

### Good for:

- Ceramic
- Wood
- Most metals

### Primary Applications:

Invisible, high-strength bonding applications for repairs, builds, and crafts.



## ClearWeld 14 mL

ClearWeld is a clear-curing epoxy that sets quickly and provides strong adhesion. Our 14 mL syringe includes a one-time-use mixer for direct adhesive application.

**Strength:** 3900 PSI

**Set time:** 5 min

**Cure time:** 1 hour

**Cure color:** Clear

Part No.	Description
50114CAN	14 mL

### Great for:

- Glass
- Tile
- Rigid plastics

### Top Attributes:

- Cures clear
- High strength
- Quick 5 min set time

### Good for:

- Ceramic
- Wood
- Most metals

### Primary Applications:

Invisible, high-strength bonding applications for repairs, builds, and crafts.



## PlasticBonder Tan 25 mL

PlasticBonder is a flexible, strong adhesive that provides long-lasting bonding and gap-filling solutions to most plastics.

**Strength:** 3770 PSI

**Set time:** 15 min

**Cure time:** 30 min

**Cure color:** Tan

Part No.	Description
50133CAN	25 mL

### Great for:

- Most flexible or rigid plastics\*

\*Not polypropylene or polyethylene

### Good for:

- Fiberglass
- Metal
- Wood

### Top Attributes:

- Flexible
- High strength
- Fast 30 min cure time

### Primary Applications:

Bonding and gap-filling solutions on most plastic substrates.

# SYRINGES



## PlasticBonder Black 25 mL

PlasticBonder is a flexible, strong adhesive that provides long-lasting bonding and gap-filling solutions to most plastics.

**Strength:** 3770 PSI

**Set time:** 15 min

**Cure time:** 30 min

**Cure color:** Black

Part No.	Description
50139CAN	25 mL

**Great for:**

- Most flexible or Rigid plastics\*

\*Not polypropylene or polyethylene

**Good for:**

- Fiberglass
- Metal
- Wood

**Top Attributes:**

- Flexible
- High strength
- Fast 30 min cure time

**Primary Applications:**

Bonding and gap-filling solutions on most plastic substrates.



## J-B Weld® 25 mL

J-B Weld is our Original Cold-Weld™ epoxy in an easy-to-use syringe dispenser for strong, lasting adhesion.

**Strength:** 5020 PSI

**Set time:** 4-6 hours

**Cure time:** 15-24 hours

**Cure color:** Dark Grey

Part No.	Description
50165CAN	25 mL

**Great for:**

- All metals
- Stone/Concrete
- Fiberglass

**Good for:**

- Rigid plastic
- Wood
- Ceramic

**Top Attributes:**

- J-B Weld's strongest epoxy

**Primary Applications:**

Bonds metal together and to other surfaces with high strength.



## KwikWeld 25 mL

KwikWeld is the fast-setting version of J-B Weld in an easy-to-use dispenser.

**Strength:** 3127 PSI

**Set time:** 6 min

**Cure time:** 4-6 hours

**Cure color:** Dark Grey

Part No.	Description
50176CAN	25 mL

**Great for:**

- Most metals
- Stone/Concrete
- Fiberglass

**Good for:**

- Rigid plastic
- Wood
- Ceramic

**Top Attributes:**

- Fast 6 minute set time
- Strong bond on most surfaces

**Primary Applications:**

Fast-bonding projects on metal and other substrates.



# SYRINGES



## PlasticWeld 25 mL

PlasticWeld is a high-strength epoxy adhesive that provides a quick-setting, bond to rigid plastics.

**Strength:** 3900 PSI

**Set time:** 5 min

**Cure time:** 1 hour

**Cure color:** Clear

Part No.	Description
50132CAN	25 mL

### Great for:

- PVC
- ABS
- Rigid plastics

### Top Attributes:

- High bond strength
- Cures clear
- Quick 5 min set time

### Good for:

- Glass
- Tile
- Metal

### Primary Applications:

Clear bonding and gap-filling applications on PVC, ABS and other rigid or semi-rigid plastics.



## MarineWeld 25 mL

MarineWeld is an adhesive & gap filler that provides waterproof, impact and UV-resistant bonds to fiberglass, most plastics, and other surfaces.

**Strength:** 2350 PSI

**Set time:** 5 min

**Cure time:** 1 hour

**Cure color:** White

Part No.	Description
50172CAN	25 mL

### Great for:

- Fiberglass
- Most plastics\*
- Rubber

\*Not polypropylene or polyethylene

### Top Attributes:

- Waterproof
- Flexible
- Rubber (Impact/vibration resistant)
- UV-resistant

### Good for:

- Metal
- Stone/Concrete

### Primary Applications:

Bonding and gap-filling applications for marine, pool, kitchen & bath.



## MinuteWeld 25 mL

MinuteWeld is a clear-curing epoxy adhesive that sets in 1 minute.

**Strength:** 2300 PSI

**Set time:** 1 minute

**Cure time:** 1 hour

**Cure color:** Clear

Part No.	Description
50101CAN	25 mL

### Great for:

- Glass
- Tile
- Ceramic

### Top Attributes:

- Sets in 1 minute
- Cures clear
- No clamping

### Good for:

- Rigid plastics
- Metal
- Stone

### Primary Applications:

Fast-setting bonding & gap-filling applications on many different substrates.

# SYRINGES



## WoodWeld 25 mL

WoodWeld is a no-foam adhesive for bonding and repairing exterior or interior wood.

**Strength:** 3770 PSI

**Set time:** 15 min

**Cure time:** 30 min

**Cure color:** Tan

Part No.	Description
50151CAN	25 mL

### Great for:

- All wood surfaces

### Top Attributes:

- No foam
- Quick setting
- Sandable & paintable

### Good for:

- Bonding wood to other substrates

### Primary Applications:

Bonds wood together and to other surfaces.



## HighHeat 25 mL

HighHeat is a heat-resistant epoxy adhesive for bonding and gap-filling substrates exposed to high temperatures.

**Strength:** 5020 PSI

**Set time:** 4-6 hours

**Cure time:** 15-24 hours

**Cure color:** Dark Grey

Part No.	Description
50197CAN	25 mL

### Great for:

- Metal
- Stone/Concrete

### Top Attributes:

- 232 °C heat resistance
- Fuel resistant

### Good for:

- Fiberglass

### Primary Applications:

Bonding and gap-filling on mufflers, tailpipes, radiators, and other automotive or high-heat repairs.



## SeamWeld 25 mL

SeamWeld provides high impact & vibration resistant bonding and sealing to automotive body panels. SeamWeld comes with a static mixer for precise application.

**Strength:** 2350 PSI

**Set time:** 5 min

**Cure time:** 1 hour

**Cure color:** White

Part No.	Description
50178CAN	25 mL

### Great for:

- Most plastics\*
- Fiberglass

### Top Attributes:

- Impact & vibration resistant
- Protects against corrosion
- Cures in 1 hour

\*Not polypropylene or polyethylene

### Good for:

- Metal
- Rubber

### Primary Applications:

Body panels, door jambs, floor pans, exterior and interior joints.

# SYRINGES



## AutoWeld 25 mL

AutoWeld is a high-strength, impact-resistant, non-shrinking automotive adhesive & filler. AutoWeld comes with a static mixer for precise application.

**Strength:** 3770 PSI

**Set time:** 15 min

**Cure time:** 30 min

**Cure color:** Black

Part No.	Description
50138CAN	25 mL

### Great for:

- Most flexible or rigid plastics\*
- Fiberglass
- Metal

\*Not polypropylene or polyethylene

### Good for:

- Rubber

### Top Attributes:

- High 3770lb strength
- Fast 30 min cure time

### Primary Applications:

Repairing and bonding interior/exterior trim, dashboards, bumpers/grilles, and other automotive repairs.



## BumperWeld 25 mL

BumperWeld is a non-shrinking adhesive, filler & sealant that provides strong repairs to automotive bumpers. BumperWeld comes with a static mixer for precise application.

**Strength:** 3770 PSI

**Set time:** 15 min

**Cure time:** 30 min

**Cure color:** Tan

Part No.	Description
50134CAN	25 mL

### Great for:

- ABS
- PC
- Aluminum

### Good for:

- Other metals
- Other plastics
- Fiberglass

### Top Attributes:

- High 3770lb strength
- Fast 30 min cure time

### Primary Applications:

Bumper repairs, mounting brackets, cracks, punctures, dents, breaks and re-attaching.



# PUTTY STICKS



J-B Weld Putty Sticks put a lot of strength and versatility right in your hands. Simply mix the putty by hand until the two components are a uniform color. Then mold, shape or fill the putty into a crack, gap or hole. Once cured, the putty can be sanded, drilled, tapped and painted.

- HAND MIXABLE EPOXY PUTTY
- MOLDS TO FIT AND SHAPE ANYWHERE
- SEALS AND FILLS TO REPAIR CRACKS AND HOLES



To see our Putty Sticks in action,  
visit [jbweld.com/our-videos](http://jbweld.com/our-videos)



# PUTTY STICKS PRODUCT GUIDE



PUTTY STICKS	Product Attributes						Metals				Plastics			Other Materials			
	Strength	Set Time	Cure Time	Dry Color	Max Temp	Fuel Resistance	Aluminum	Copper	Iron	Steel	PVC	ABS	Flexible Plastic*	Wood	Stone/Concrete	Fiberglass	Ceramic
SteelStik	4000 PSI	5 min	1 hour	Grey	350° F	Better	Best	Best	Best	Best	Good	Good		Good	Best	Better	Good
WaterWeld	4730 PSI	25 min	1 hour	White	200° F	Good	Better	Better	Better	Better	Best	Best		Better	Better	Best	Better
KwikWood	2450 PSI	15-25 min	1 hour	Tan			Good	Good	Good	Good	Good	Good		Best	Good	Good	Good
PlasticWeld	700 PSI	25 min	4 hours	White	200° F		Good	Good	Good	Good	Better	Better	Best	Better	Good	Good	Good
HighHeat	4000 PSI	1 hour	8 hours	Grey	500° F	Better	Better	Better	Better	Better	Good	Good			Better	Better	Best
TankWeld	4000 PSI	5 min	1 hour	Grey	350° F	Best	Best	Better	Better	Best	Good	Good			Better	Better	Better



SteelStik  
8267CAN



WaterWeld  
8277CAN



KwikWood  
8257CAN



PlasticWeld  
8237CAN



HighHeat  
8297CAN



TankWeld  
8217CAN

# PUTTY STICKS



## SteelStik 3.5 In

SteelStik is a hand-mixable epoxy putty that fills gaps, seals cracks, and provides structural repair on steel and other metal surfaces.

**Strength:** 4000 PSI

**Set time:** 5 min

**Cure time:** 1 hour

**Cure color:** Grey

Part No.	Description
8267CAN	3.5 In

### Great for:

- All metals
- Stone/Concrete

### Top Attributes:

- Waterproof up to 500 PSI
- Fuel resistant
- Fast 5 minute set time

### Good for:

- Fiberglass
- Rigid plastics

### Primary Applications:

Gap-filling, sealing, and structural repairs on plumbing, auto, home and other metal applications.



## WaterWeld 3.5 In

WaterWeld is a waterproof, hand-mixable epoxy putty that seals cracks and repairs pipes and other surfaces exposed to water.

**Strength:** 4730 PSI

**Set time:** 25 min

**Cure time:** 1 hour

**Cure color:** White

Part No.	Description
8277CAN	3.5 In

### Great for:

- Rigid plastic
- Fiberglass

### Top Attributes:

- Waterproof up to 500 PSI
- Cures underwater

### Good for:

- All metals
- Stone/Concrete

### Primary Applications:

Sealing and structural repairs on plumbing, marine, pool, bath/shower, and other applications.



## KwikWood 3.5 In

KwikWood is a hand-mixable epoxy putty for easy wood repair, filling, and sealing.

**Strength:** 2450 PSI

**Set time:** 15-25 min

**Cure time:** 1 hour

**Cure color:** Tan

Part No.	Description
8257CAN	3.5 In

### Great for:

- Wood gap-filling
- Sealing
- Rebuilding

### Top Attributes:

- Easy to sand
- Paintable in 1 hour
- Won't shrink or sag

### Good for:

- Wood bonding

### Primary Applications:

Filling holes and other damage in wood due to rot, insects, or other factors.



# PUTTY STICKS



## PlasticWeld 3.5 In

PlasticWeld is a hand-mixable epoxy putty that fills gaps, seals cracks and provides structural repair on most plastics.

**Strength:** 700 PSI

**Set time:** 25 min

**Cure time:** 4 hours

**Cure color:** White

Part No.	Description
8237CAN	3.5 In

### Great for:

- Most flexible or rigid plastics\*

\*Not polypropylene or polyethylene

### Good for:

- Fiberglass
- Ceramic
- Metal

### Primary Applications:

Gap-filling and sealing on most plastic surfaces.

### Top Attributes:

- Good bond strength to most plastics
- Sandable & paintable



## HighHeat 3.5 In

HighHeat is a heat-resistant, hand-mixable epoxy putty that fills gaps and seals cracks on high-temperature surfaces.

**Strength:** 4000 PSI

**Set time:** 1 hour

**Cure time:** 8 hours

**Cure color:** Grey

Part No.	Description
8297CAN	3.5 In

### Great for:

- Metal
- Stone/Concrete

### Good for:

- Fiberglass
- Ceramic

### Primary Applications:

Gap-filling and structural repair on mufflers, tailpipes, and other automotive or high-heat repairs.

### Top Attributes:

- 500° F heat resistance
- Fuel resistant



## TankWeld 3.5 In

TankWeld is a fuel-resistant hand-mixable epoxy putty that seals and repairs metal tanks.

**Strength:** 4000 PSI

**Set time:** 5 min

**Cure time:** 1 hour

**Cure color:** Grey

Part No.	Description
8217CAN	3.5 In

### Great for:

- Metal

### Good for:

- Fiberglass
- Rigid plastics\*

\*Not polypropylene or polyethylene

### Primary Applications:

Sealing and repairing holes in metal tanks for water, gas and other chemicals.

### Top Attributes:

- Fuel resistant
- Fast 5 minute set time

# SUPERWELD



J-B Weld's SuperWeld line offers innovative high-strength super glues. They're easy to use, set quickly and are ideal for instant bonding on crafts, home and auto repairs and more.

- HIGH-STRENGTH SUPER GLUES
- VERSATILE, QUICK-BONDING SOLUTIONS



To see our SuperWeld in action,  
visit [jbweld.com/our-videos](http://jbweld.com/our-videos)



# SUPERWELD PRODUCT GUIDE



	Product Attributes			Top Benefits
SUPERWELD	Size	Strength	Set Time	
SuperWeld Professional Grade	20g	3500 PSI	10 sec	Highest strength
SuperWeld Extreme	15g	3000 PSI	30 sec	Thick gel, highest flexibility, impact resistance, and control
SuperWeld Brush-On	6g	3100 PSI	10 sec	Brush-on for clean, controlled applications



SuperWeld Professional Grade  
33120CAN



SuperWeld Extreme  
33400CAN



SuperWeld Brush-On  
33106CAN



# SUPERWELD



## SuperWeld Professional Grade 20g

SuperWeld Professional Grade is our strongest super glue that provides an instant bond in just seconds.

**Strength:** 3500 PSI

**Set time:** 10 sec

**Cure time:** 24 hours

**Great for:**

- All metals
- Stone/Concrete
- Fiberglass

**Top Attributes:**

- Strongest super glue
- 10 second set time

**Good for:**

- Rigid plastics
- Glass
- Wood

**Primary Applications:**

High-strength, quick bonding for repairs and projects on most surfaces.

Part No.	Description
----------	-------------

33120CAN	20 g
----------	------



## SuperWeld Extreme 15g

SuperWeld Extreme is a super glue gel that is specially-formulated to provide a flexible, impact-resistant bond in seconds.

**Strength:** 3000 PSI

**Set time:** 30 sec

**Cure time:** 24 hours

**Great for:**

- Most plastics
- Rubber
- Leather

**Top Attributes:**

- Flexible, impact-resistant bond
- No-drip gel formula for maximum control

**Good for:**

- All metals
- Stone/concrete
- Wood

**Primary Applications:**

Bonding applications for repair and crafts that require flexibility, impact-resistance, or need to be applied on vertical surfaces.

Part No.	Description
----------	-------------

33400CAN	15 g
----------	------



## SuperWeld Brush-On 6g

SuperWeld Brush-On delivers a strong bond in just seconds and includes a handy brush for even application on surfaces.

**Strength:** 3100 PSI

**Set time:** 10 sec

**Cure time:** 24 hours

**Great for:**

- Rigid Plastics
- Metal

**Top Attributes:**

- Brush included for no-mess, controlled applications

**Good for:**

- Glass
- Wood
- Stone/Concrete

**Primary Applications:**

Clean, controlled glue applications for craft projects or repairs, especially in tight spaces.

Part No.	Description
----------	-------------

33106CAN	6 g
----------	-----

# FIBERWELD REPAIR CASTS



J-B Weld FiberWeld repair casts combine high-strength fiberglass wraps with adhesive for quick-curing repairs or structural reinforcement. They're easy to apply; just dip in water, wrap around the damaged area and secure with the supplied bandage to cure. After curing, the wraps can be sanded and painted.

- **EASY TO USE: JUST WET IT AND WRAP IT**
- **HIGH STRENGTH FOR STRUCTURAL REPAIRS AND SEALING**
- **CAN PAINT AND SAND**



To see our Repair Casts in action,  
visit [jbweld.com/our-videos](http://jbweld.com/our-videos)



# FIBERWELD REPAIR CASTS

## PRODUCT GUIDE



Product Attributes		Repair and Reinforce Applications
Length	Cure Color	
FiberWeld Permanent Repair Cast	2" x 36"	Black
FiberWeld 1" Pipe Repair Cast	2" x 48"	White
		Tool handles, furniture, yard equipment, sporting & camping gear
		Plumbing pipes up to 1" diameter



FiberWeld Permanent Repair Cast  
38236CAN



FiberWeld 1" Pipe Repair Cast  
38248CAN



# FIBERWELD REPAIR CASTS



## FiberWeld Permanent Repair Cast 2" x 36"

FiberWeld Permanent Repair Cast is a high-strength fiberglass wrap, permeated with a specially-formulated resin that hardens like steel in 15 minutes.

**Strength:** 1500 PSI

**Set time:** 15 min

**Cure time:** 1 hour

**Great for:**

- Wood
- Metal
- Fiberglass

**Top Attributes:**

- Works like a cast – just wet and wrap
- Cures in 15 minutes
- Sandable & paintable

**Good for:**

- Rubber
- Rigid plastics

**Primary Applications:**

Structural repairs and reinforcement on furniture, tool handles, sporting equipment, and more.

Part No.	Description
38236	2" x 36"



## FiberWeld 1" Pipe Repair Cast 2" x 48"

FiberWeld 1" Pipe Repair Cast is a high-strength fiberglass wrap, permeated with a specially-formulated resin to repair pipes up to 1" in diameter.

**Strength:** 1500 PSI

**Set time:** 15 min

**Cure time:** 1 hour

**Great for:**

- PVC
- Copper
- Steel

**Top Attributes:**

- Works like a cast – just wet and wrap
- Holds water pressure up to 500 PSI
- Anti-corrosive

**Good for:**

- Cast iron
- ABS

**Primary Applications:**

Repair and reinforcement for pipes up to 1" diameter.

Part No.	Description
38248	2" x 48"

# EXHAUST REPAIR



J-B Weld Exhaust Repair pastes and adhesives are designed to seal and structurally repair almost any part of your vehicle's exhaust system. These products are specially formulated to withstand extremely high temperatures.

- RESIST HIGH TEMPERATURES
- PASTES FOR SEALING
- ADHESIVES FOR REPAIRING



To see our Exhaust Repair in action,  
visit [jbweld.com/our-videos](http://jbweld.com/our-videos)



# EXHAUST REPAIR PRODUCT GUIDE



	Product Attributes				Application	Use On
	Type	Size	Max Temp	Cure Time		
<b>EXHAUST REPAIR</b>						
ExhaustWeld	Wrap	2" x 72"	1100° F	2 hours (no heat), 20 min (with heat)	High strength repairs, sealing and insulation on breaks, holes and cracks	Anywhere on exhaust system
Tiger Patch Kit	Wrap	2" x 36"	600° F	20 min (with heat)	High strength sealing and insulation	Mufflers and Tailpipes
ExtremeHeat	Paste	3 oz	1000° F	20 min (with heat)	Sealing cracks	Anywhere on exhaust system
Exhaust System Sealant	Paste	3 oz	850° F	20 min (with heat)	Gap filling and seam/connector	From tailpipe to catalytic converter
MufflerSeal	Paste	6 oz/12 oz	850° F	20 min (with heat)	Sealing cracks	Mufflers and Tailpipes



ExhaustWeld  
38572CAN



Tiger Patch Kit  
39205CAN



ExtremeHeat  
37901CAN



Exhaust System Sealant  
37903CAN



MufflerSeal  
37906CAN



- Sealing cracks

# EXHAUST REPAIR



## Exhaust System Sealant 3 oz

Exhaust System Sealant is a heat-resistant paste that seals and fills gaps on exhaust systems and pipe connections.

**Temp resistance:** 850° F

**Set time:** 30 min

**Cure time:** 2 hours

### Use on:

- From tailpipe to catalytic converter

### Primary Applications:

- Gap-filling and seam/connector sealing

Part No.	Description
37903CAN	3 oz



## MufflerSeal 6 oz

MufflerSeal is a sealing paste formulated to resist heat on mufflers and tailpipes.

**Temp resistance:** 850° F

**Set time:** 30 min

**Cure time:** 2 hours

### Use on:

- Mufflers and tailpipes

### Primary Applications:

- Sealing cracks

Part No.	Description
37906CAN	6 oz

# SILICONE SEALANTS



J-B Weld Silicone Gasket Makers and Sealants resist high temperatures, oil and water to provide long-lasting solutions for automotive and home repair.

- GASKET MAKERS AND SEALANTS
- GREAT ADHESION AND FLEXIBILITY
- 100% SILICONE — NON-SHRINKING





# SILICONES

# PRODUCT GUIDE



SILICONES	Product Attributes			Applications
		Sensor Safe?	Max Temp	
Ultimate Grey	3oz	Yes	700° F	Intake manifolds, transmission pans, oil pans
Ultimate Black	3oz	Yes	700° F	Intake manifolds, transmission pans, oil pans
Hi-Temp Red	3oz	No	650° F	Manifolds, thermostat housing, valve covers
Black	3oz	No	400° F	Oil pans, interior trim, lens housing
Blue	3oz	No	400° F	Oil pans, transmissions, water pumps
Clear	3oz	No	400° F	Sealing and caulking of baths, showers and windows



Ultimate Grey  
32327CAN



Ultimate Black  
32329CAN



Hi-Temp Red  
31314CAN



Black  
31319CAN



Blue  
31316CAN



Clear  
31310CAN

# SILICONES



## Ultimate Grey 3 oz

### Top Attributes:

- High-torque load applications
- High-temperature resistant up to 700° F
- Sensor safe

### Primary Applications:

- Intake manifolds
- Transmission pans
- Oil pans

Part No.	Description
32327CAN	3 oz



## Ultimate Black 3 oz

### Top Attributes:

- Maximum oil resistance
- High flexibility
- Sensor safe

### Primary Applications:

- Oil pans,
- Valve covers
- Transmission Pans

Part No.	Description
32329CAN	3 oz



## Hi-Temp Red 3 oz

### Top Attributes:

- High-temperature resistant up to 650° F

### Primary Applications:

- Manifolds
- Thermostat housing
- Valve covers

Part No.	Description
31314CAN	3 oz

# SILICONES



## Black 3 oz

### Top Attributes:

- High flexibility
- Waterproof
- Temperature Resistant up to 650° F

### Primary Applications:

- Oil pans
- Interior Trim
- Lens housing

Part No.	Description
----------	-------------

31319CAN	3 oz
----------	------



## Blue 3 oz

### Top Attributes:

- Waterproof
- Non-shrinking
- Flexible

### Primary Applications:

- Oil pans
- Transmissions
- Water pumps

Part No.	Description
----------	-------------

31316CAN	3 oz
----------	------



## Clear 3 oz

### Top Attributes:

- Waterproof
- Non-shrinking
- Flexible

### Primary Applications:

- Sealing and caulking of baths, showers and windows

Part No.	Description
----------	-------------

31310CAN	3 oz
----------	------



# THREAD LOCKERS



J-B Weld Threadlockers provide a reliable and superior lock and seal for threaded fasteners on all mechanical parts, body assemblies, and hundreds of other applications to prevent loosening of fasteners from shock and vibration.

- WORKS ON SCREWS, BOLTS, AND MORE, BETWEEN ¼" AND 1" LONG
- NO SPILLS, DRIPS, OR CLOGS
- HEAT RESISTANT UP TO 300° F



# THREADLOCKERS

## PRODUCT GUIDE



	Size	Application
<b>THREADLOCKERS</b>		
Perma-Lock Medium Strength Blue	6 mL / 36 mL	Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly
Perma-Lock High Strength Red	6 mL / 36 mL	Adhesive that locks and seals threaded fasteners that require resistance to severe shock and vibrations



Perma-Lock  
Medium Strength Blue  
24206CAN



Perma-Lock  
Medium Strength Blue  
24236CAN



Perma-Lock  
High Strength Red  
27106CAN



Perma-Lock  
High Strength Red  
27136CAN

# THREADLOCKERS



## Perma-Lock Medium Strength Blue 6 mL

### Applications:

- Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly.

Part No.	Description
24206CAN	6 mL



## Perma-Lock Medium Strength Blue 36 mL

### Applications:

- Adhesive that locks and seals threaded fasteners, but allows for easy hand-disassembly.

Part No.	Description
24236CAN	36 mL



## Perma-Lock High Strength Red 6 mL

### Applications:

- High-strength adhesive that permanently locks and seals threaded fasteners. High resistance to severe shock and vibrations. Requires special tools for disassembly.

Part No.	Description
27106CAN	6 mL



## Perma-Lock High Strength Red 36 mL

### Applications:

- High-strength adhesive that permanently locks and seals threaded fasteners. High resistance to severe shock and vibrations. Requires special tools for disassembly.

Part No.	Description
27136CAN	36 mL



# HERCULINER



Herculiner is the original do-it-yourself brush-on bed liner kit. In three easy steps a truck bed can be covered with a tough, textured polyurethane coating just like professional spray-on liners. It prevents rust and won't chip, flake or peel. Herculiner can be applied to many different types of surfaces, such as concrete, plastic, rubber, metal, wood or fiberglass.

- TOUGH, TEXTURED PAINT-ON BED LINER
- PREVENTS RUST
- WON'T CHIP, FLAKE OR PEEL



To see our Herculiner in action,  
visit [herculiner.com](http://herculiner.com)



# HERCULINER



## Herculiner Bed Liner Kit

### Contents:

- One Gallon of Herculiner Ready-to-use Protective Coating
- Application Brush for Tight Spots and Corners
- Two Rollers for Easy/Even Application
- One Roller Handle
- Abrasive Pad to Prepare Truck Bed

### Coverage

- The kit covers (1) 6ft. truck bed (Add quart for 8ft truck bed).
- Covers 55-60 sq. ft.

### Part No.

HCL1B8CAN



## Herculiner Gallon Can

### Top Attributes:

- Provides a durable skid-resistant protective coating
- Prevents rust and won't chip, flake or peel
- Tough, textured formula with a "like new" finish

### Coverage

- Covers (1) 6ft. truck bed (Add quart for 8ft truck bed).
- Covers 55-60 sq. ft.

### Part No.

HCL1B3CAN



## Herculiner Aerosol Can

### Contents:

- Herculiner's #1 DIY liner in an easy-to-use aerosol spray, providing the same waterproof protection in the convenience of a spray-on coating.

### Primary Applications:

- Great for touch-ups, cutting in before applying roll-on Herculiner, or protecting hard-to-reach areas like undercoatings and wheel wells.

### Part No.

HALB15CAN

## **THOMAS FAZEKAS**

**DIRECTOR OF SALES & BUSINESS DEVELOPMENT CANADA**

tom@jbweld.com | 248-701-5712 (Cell)

**J-B Weld Company**

P.O.Box 483 | Sulphur Springs, TX USA 75483

**jbweld.com**