


CENTRIFUGAL MONOBLOC PUMP

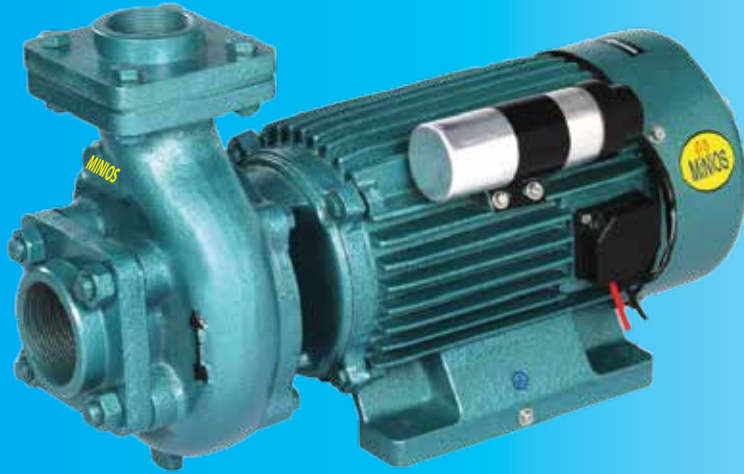

TECHNICAL SPECIFICATION	
HEAD RANGE	UP TO 15 Meters
DISCHARGE RANGE	UP to 400 l/m
POWER RATING	1.1 kW (1.5HP)
VOLTAGE RATING	180 to 220 Volts (Single Phase)
INSULATION	B-Class
MOTOR SPEED	2800 rpm

Features

- High efficiency and energy saving design
- Advanced water Cooled Motor Designs
- Dynamically balanced rotating parts
- Replaceable Wearing Parts
- Easy maintainable pump

MATERIAL OF CONSTRUCTION	
IMPELLER	Casting Iron
CASING	Casting Iron
MOTOR BODY	Stainless steel
SHAFT	Stainless steel

Model	HP/kw	Pipe Size (mm)	Total Head in Meters								
			Meter	5	6	8	9	10	12	14	15
			Feet	16	20	26	30	32	40	45	48
MIM 152	1.5/1.1	50X50	l/m	400	390	380	375	370	360	275	168

Applications



Agriculture Use



Sprinkler Irrigation



Industrial Use



Gardening and Farm Irrigation



Community Water supply