


CENTRIFUGAL MONOBLOC PUMP

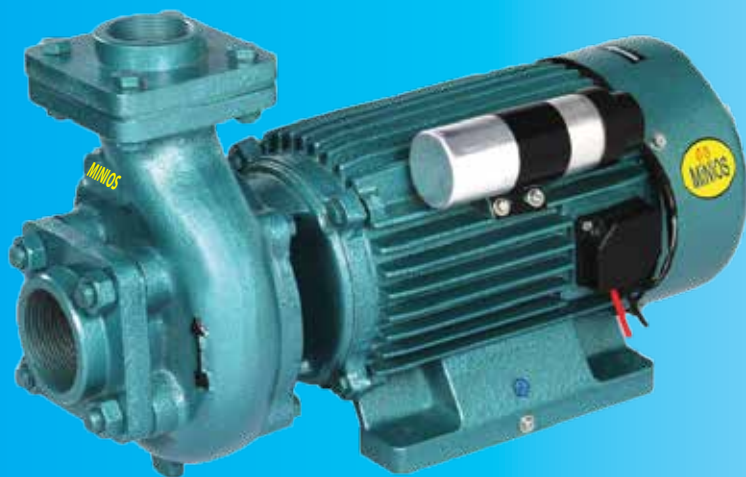

TECHNICAL SPECIFICATION	
HEAD RANGE	UP TO 21 Meters
DISCHARGE RANGE	UP to 520 l/m
POWER RATING	1.5 kW (2.0 HP)
VOLTAGE RATING	180 to 220 Volts (Single Phase)
INSULATION	B-Class
MOTOR SPEED	2800 rpm

Features

- High efficiency and energy saving design
- Advanced water Cooled Motor Designs
- Dynamically balanced rotating parts
- Replaceable Wearing Parts
- Easy maintainable pump

MATERIAL OF CONSTRUCTION	
IMPELLER	Casting Iron
CASING	Casting Iron
MOTOR BODY	Stainless steel
SHAFT	Stainless steel

Model	HP/kW	Pipe Size (mm)	Total Head in Meters							
			Meter	12	14	15	16	18	20	21
			Feet	40	45	48	52	60	65	68
MIM 201	2.0/1.5	50X50	l/m	520	515	500	474	413	340	275

Applications



Agriculture Use



Sprinkler Irrigation



Industrial Use



Gardening and Farm Irrigation



Community Water supply