


Exterior Door Lock Cover Instructions

Exterior Door Lock Cover

1. If placing the Door Lock Cover while it is on the vehicle then apply an easily removal tape around the existing Door Lock as shown.
2. Clean the existing Door Lock with a cleaner (ie. isopropyl Alcohol) being careful not to get it onto the vehicle.
3. Place 3 drops of the supplied Super Glue Gel onto the Door Lock at the positions indicated.
4. There should not be any Super Glue leaching out from behind the Door Lock Cover but if there is wipe it away with Acetone or nail polish remover.
5. Wait 30 minutes then remove the tape. Full adhesion/glue set up will occur overnight.

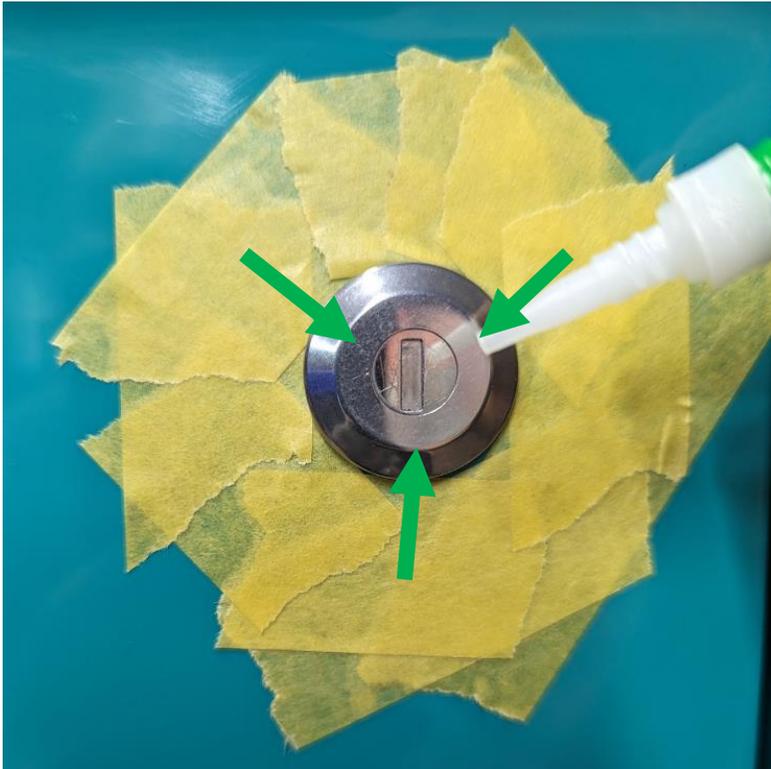

* Please note – Disruptive Restomods LLC does not cover any claims for damage