



LED lamp with flexible arm.

- Spot 3-6-9 led.
- PVC sheathed flexible arm L.700mm.
- Narrow, medium and wide beam angle.
- Integrated driver LED.
- 24Vdc Power supply (IDS System)

Electrical features


Power supply	24Vdc
LED driver 500mA	Integrated driver (IDS System)
IEC class	III

Optical and mechanical features

LED type	Power led
LED lifetime	50 000 h
Lens	8°-25°-40°; 60° BF9 only
Light color	5000K - CRI75
Structure	Aluminum + ABS
Coverage	Tempered front glass sp.4mm
Protection index	IP65 (spot)
Switch	on/off sulla testa della lampada
Lamp color	Black
Working temperature	-20 +55°C
Fastening	Screws / Clamp O4 / Magnetic base
Power cable	H05RNF 2x0,75mmq Neoprene cable L1,5m

Model	Power supply	N. of LED	Power Watt	Lumen led	Driver	Weight
BF3.XX.24	24Vdc	3	6W	450lm	IDS System	1,50 Kg / 3,31 lb
BF6.XX.24	24Vdc	6	12W	900lm	IDS System	1,50 Kg / 3,31 lb
BF9.XX.24	24Vdc	9	18W	1350lm	IDS System	2,00 Kg / 4,41 lb

DIMENSIONS (all values in millimeters / inch)

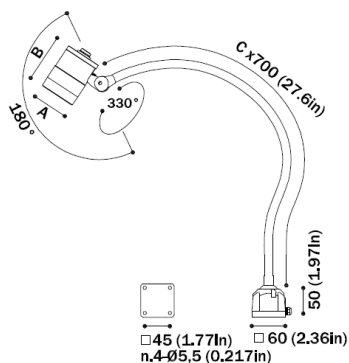

Model	A – mm/in	B – mm/in	C –mm/in
BF3.XX.24	64 / 2.52	86 / 3.39	15 / 0.591
BF6.XX.24	64 / 2.52	86 / 3.39	15 / 0.591
BF9.XX.24	90 / 3.54	101 / 3.98	18 / 0.709



LED lamp with flexible arm.

- Spot 3-6-9 led
- PVC sheathed flexible arm L.700mm
- Narrow, medium and wide beam angle
- Driver LED in the base
- 230V 50/60Hz Power supply
- Dimmable versions available

Electrical features


Power supply 230V 50/60Hz
 LED driver 500mA, LED driver 350 mA (BF9) Driver in the ABS base
 IEC Class II

Optical and mechanical features

LED type Power led
 LED lifetime 50 000 h
 Lens 8°-25°-40°; 60° BF9 only
 Light color 5000K - CRI75
 Structure Aluminum + ABS
 Coverage Tempered front glass sp.4mm
 Protection index IP65 (spot)
 Switch on/off on the spot
 Lamp color Black
 Working temperature -20 +55°C
 Fastening Screws / Clamp O3 / Magnetic base
 Power cable PVC L1,5m with Schuko plug

Model	Power supply	N. of LED	Power Watt (@mA)	Lumen led	Driver	Weight
BF3.XX.230	230V 50/60HZ	3	6W (500mA)	450lm	A0181005060705B	1,50 Kg / 3,31 lb
BF6.XX.230	230V 50/60HZ	6	12W (500mA)	900lm	A0141005060709B	1,50 Kg / 3,31 lb
BF9.XX.230	230V 50/60HZ	9	9W (350mA)	960lm	A0131005060511B	2,00 Kg / 4,41 lb

DIMENSIONS (all values in millimeters / inch)

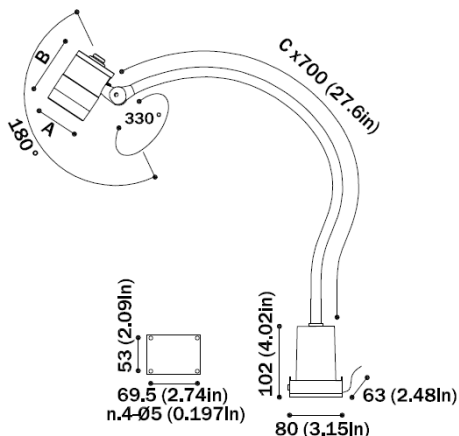

Model	A – mm/in	B – mm/in	Ø C –mm/in
BF3.XX.230	64 / 2.52	86 / 3.39	15 / 0.591
BF6.XX.230	64 / 2.52	86 / 3.39	15 / 0.591
BF9.XX.230	90 / 3.54	101 / 3.98	18 / 0.709

All the information gathered by this manual can be modified at any time without prior notice and do not imply any obligation by CCEA.