


Industrial Open Frame Touch Display – OF08

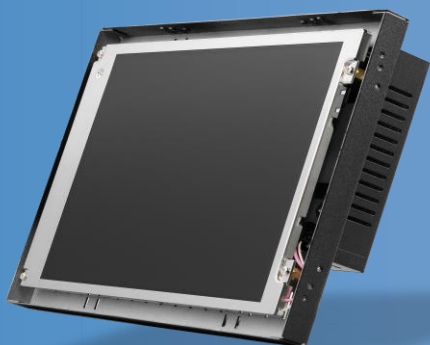

Features

- High contrast color TFT LCD display supports resolution up to 800 x 600
- Compatible with VGA, IBM and VESA signal standards
- Supports DDC 1/2B for Plug & Play compatibility
- Advanced OSD control for picture quality adjustment
- VESA standard mounting
- RoHS/WEEE Compliance

Specifications

LCD Display	8.4" TFT active matrix panel
Pixel Pitch	0.213 (H) x 0.213 (V) mm
Max. Resolution	SVGA 800 x 600
Contrast Ratio	600:1 (Typ.) w/o sensor or glass
Brightness	450 cd/m ² (Typ.) w/o sensor or glass
Response Time (Tr+Tf)	30 ms (Typ.)
Display Color	262K / 16.2M
Effective Display Area	170.4 (H) x 127.8 (V) mm
Viewing Angle(CR≥10)	160°(H) x 140°(V) (Typ.) w/o sensor or glass
Lamp Life (hr.) / Backlight	50,000 (Min.) / LED
Input Signals	Analog
Signal Connector	Analog D-Sub 15 pin (VGA)
Scan Frequency	60~75 Hz
Touch Panel	5-wire Resistive
Touch Interface	RS-232 or USB A type
Key Control	Power on/off with LED, Menu Select, Adjustment (+/-)
Power	Universal Power Adapter Input AC 100~240V, 50~60 Hz Output DC 12V / 3.3A, 40W
Operating Temperature	0°C~ 40°C (32°F~ 104°F)
Operating Humidity	10%~90% (no condensation)
Storage Temperature	-20° ~ 60°C (-4°F~ 140°F)
Storage Humidity	10%~90% (no condensation)
Dimensions	218.0 x 163.0 x 40.9 mm
Weight (Net)	1.8 kg
Certification	CE/FCC

Ordering Information

OF-08

8.4" TFT 800 x 600 Open Frame Touch Display, 450 cd/m², resistive touch screen, OSD control,

