


## PUR RETRACTING CONTROL CABLE 300-750 VOLT

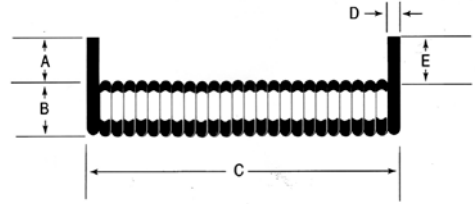

PUR coil cables have excellent chemical and abrasion qualities. The retractability of PUR is proven in high abuse application such as pendent switches. Temperatures rating is **-30° to +80°c** indoor and outdoor environments. Conforms to a wide range of American and European approvals.

CABLEscience® custom manufactures these cables to OEM specifications in extended lengths up to 60 ft.

Construction: Bare or Tinned stranded copper, **TPE** insulation and **PUR** jacket.

Part No. 20 ft. EXT.	Cond. No.	AWG. SIZE	Volt rating	AMP rating	Cable O.D. (D)	Coil O.D. (C)
PUR182-20	2	18	300/500	7	0.275"	0.910
PUR183-20	3	18	300/500	7	0.290"	1.15
PUR184-20	4	18	300/500	5.6	0.295"	1.200
PUR185-20	5	18	300/500	4.9	0.354"	1.300
PUR187-20	7	18	300/500	4.0	0.425"	1.600
PUR162-20	2	16	450/750	10	0.335"	1.250
PUR163-20	3	16	450/750	10	0.350"	1.300
PUR165-20	5	16	450/750	5.6	0.430"	1.600
PUR167-20	7	16	450/750	8	0.535"	2.050
PUR143-20	3	14	450/750	15	0.420"	1.600"
PUR145-20	5	14	450/750	15	0.520"	2.010"