


PUR ELECTRONIC Retracting Coil Cord



NON-SHIELDED

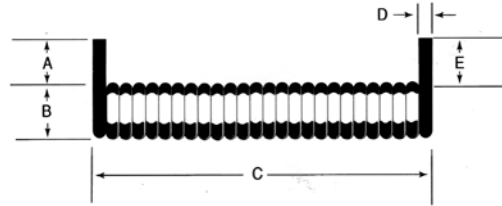

Construction: Stranded Tinned copper conductor, PVC insulation and black PUR jacket.
Standard length: 2ft. (C) retracted – 10ft. extended. Straight leads (A and E) are 6" each end.
 Custom cable constructions, jacket colors and working lengths available upon request.

Part No. 10ft -EXT. LENGTH	COND. No.	AWG. SIZE	Ohms Per 1000ft.	AMPS @ 100V	Nom. CABLE DIAMETER" (D)	Nom. COIL DIAMETER" (B)
EC3012-24	12	30	87.5	1/2	0.200	.730
EC328-24	2	28	64	1/2	0.150	.500
EC282-24	3	28	64	1/2	0.155	.500
EC284-24	4	28	64	1/2	0.160	.500
EC286-24	6	28	64	1/2	0.180	.700
EC289-24	9	28	57	1/2	0.205	.750
EC2812-24	12	28	57	1/2	0.210	.750
EC2815-24	15	28	57	1/2	0.250	.880
EC262-24	2	26	37.5	1/2	0.157	.595
EC263-24	3	26	37.5	1/2	0.165	.710
EC264-24	4	26	37.5	1/2	0.173	.748
EC265-24	5	26	37.5	1/2	0.205	.790
EC2612-24	12	26	34.5	1/2	0.245	.890
EC222-24	2	22	16.0	5	0.175	.680
EC227-24	7	22	16.0	3.5	0.253	.925
EC229-24	9	22	16.0	3	0.290	1.05
EC2236-24	36	22	15.0	2.5	0.490	1.750