


PUR ELECTRONIC Retracting Coil Cord

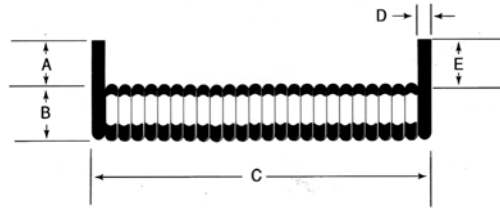

SHIELDED

Construction: Stranded Tinned copper conductor, PP (polypropylene) insulation and black PUR jacket.

Shield option: Copper serve(spiral) shield 85% coverage or Aluminum Mylar Tape with Drain wire.

(See shield design options to choose the right shielding type for your application)

Standard length: 2ft. (C) retracted – 10ft. extended. Straight leads (A and E) are 6" each end. Custom cable constructions, jacket colors and working lengths available upon request.

Part No. 10ft -EXT. LENGTH	COND. No.	AWG. SIZE	Ohms Per 1000ft.	AMPS @ 100V	Nom. CABLE DIAMETER" (D)	Nom. COIL DIAMETER" (B)
EC3012-24	12	30	87.5	1/2	0.200	.770
EC328-24	2	28	64	1/2	0.170	.540
EC282-24	3	28	64	1/2	0.175	.540
EC284-24	4	28	64	1/2	0.180	.540
EC286-24	6	28	64	1/2	0.200	.740
EC289-24	9	28	57	1/2	0.225	.790
EC2812-24	12	28	57	1/2	0.240	.790
EC2815-24	15	28	57	1/2	0.270	.920
EC262-24	2	26	37.5	1/2	0.180	.615
EC263-24	3	26	37.5	1/2	0.185	.750
EC264-24	4	26	37.5	1/2	0.195	.788
EC265-24	5	26	37.5	1/2	0.225	.820
EC2612-24	12	26	37.5	1/2	0.265	.930
ECS122-24	1	22	14	1	0.180	.630
ECS222-24	2	22	14	1	0.220	0.750
ECS322-24	3	22	14	1	0.230	0.770
ECS422-24	4	22	14	1	0.250	0.810
ECS522-24	5	22	14	1	0.275	0.860
ECS2212-24	12	22	14	1	0.390	1.500

