
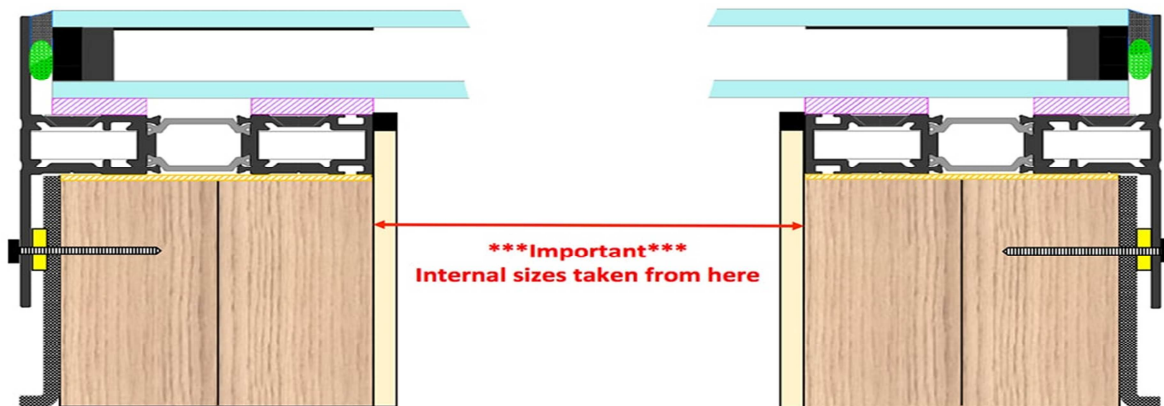


FLAT SKYLIGHTS - ROOFLIGHTS

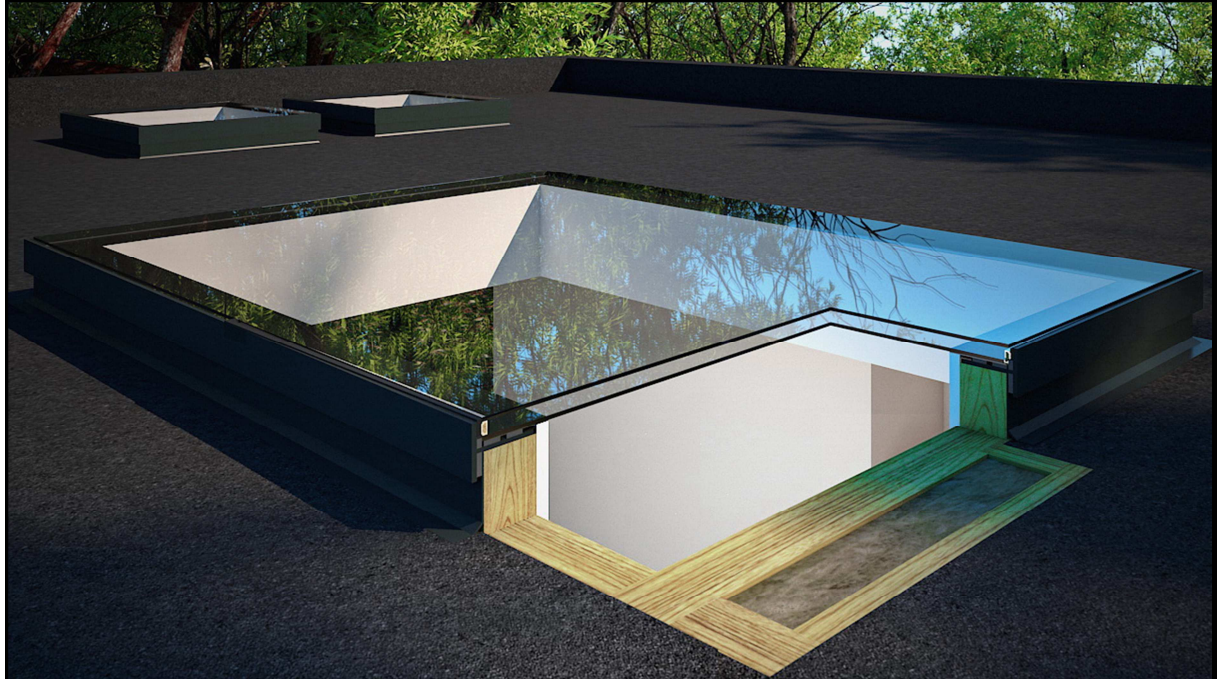

Technical Specifications

The Fixed Skylight comes with a 32mm DGU toughened safety glass with low-e coating and warm edge spacer. The low-e coating allows the sun's natural heat (solar gain) to pass through the panes then the low-e coating reflects the heat gain back into the room, which is more energy efficient.

The warm edge spacer is made of an insulating plastic composite material that becomes a barrier to heat loss, keeping the edge of the unit warm, resulting in less heat loss.

Manufactured from our own T- aluminium frame profile, thermally broken with polyamide insulation sections to prevent cold bridging and stop condensation.

The frames are powder coating; supplied in any RAL colour - internally and externally.