


SHERA Wall Board

SHERA Wall Board is an ideal solution to walling, especially designed for indoor and outdoor wall applications. This series comes with a square-cut edge profile for exposed - joint wall and a recessed edge profile for smooth seamless wall. Installation is easy with cutting and drilling. Other great properties include durability, resistance to water-humidity-fire-impact and soundproof, therefore it is a perfect choice for walling in residential, hotel, resort, and industrial buildings. *SHERA* Wall Board will bring a good quality of life to homeowners everywhere.



Smooth seamless jointing

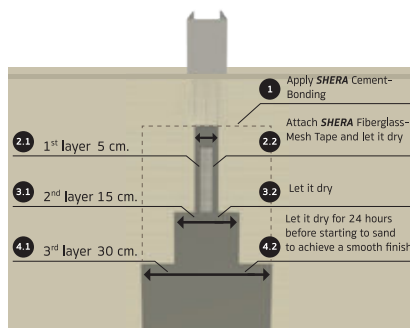


Product Information



Profile	Size (cm.) (Thickness*Width*Length)	Weight (kg./pc.)	Quantity (pc./sq.m.)	Application area
Square-Cut Edge	0.6x122x244	27.91	0.34	Interior and exterior wall
	0.8x122x244	37.26		
	1.0x122x244	46.58		
Recessed Edge	1.2x122x244	54.08		Smooth interior wall *made to order item
	0.6x122x244	27.66		
	0.8x122x244	36.99		

Available in metric size.

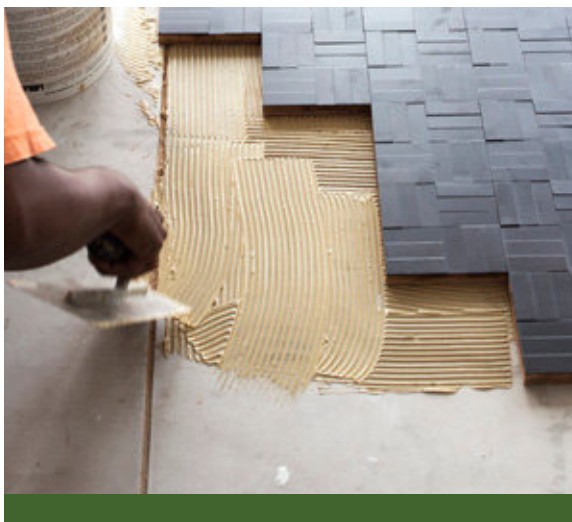

Underlay *SHERA* Board

Underlay Board for Floor

SHERA Board with 8, 10 and 12 mm. thickness helps you prepare the flooring surface quicker than other conventional methods, a better way to achieve a completely level floor with less installation time. It also prevents further moisture issues and provides a quality substrate for various finishing such as ceramic tiles, engineered wood, laminate, parquet and rubber tiles. *SHERA* Board will help adjust level of flooring surface easier, smoother, and more durable.

Underlay Board for Roof

SHERA Board with 6, 8, 10 and 12 mm. thickness is an essential protective layer that helps prevent water leaking from the roof. It's suitable to apply as an underlay to roofs with 25-40 degree pitch. And for the maximum result, it's recommended that *SHERA* board is installed on rafters horizontally prior to installing purlins and roofs.