




LTC Babel Fish Interface for Powerdrive Orbit RSS

Lateral Technology offers real time data transmission from the Orbit Rotary Steerable System.

Up to 0.25 seconds per bit data transmission

Operating specs: 175C, 1000Gs / 30Gs RMS for shock and vibration & up to 20,000 psi

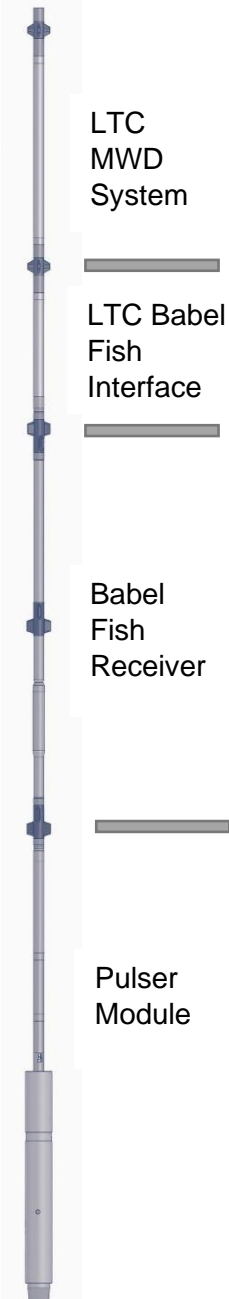

Downlink confirmations - never guess if the Orbit tool has received a downlink command.

Steering information - visualize the Orbit directional measurements and steering status.

Tool health - with real time data, no more guessing if the RSS tool is operating correctly.

Formation evaluation - real time access to Orbit LWD measurements.

Please call us - we will both be glad you did!

Raulie Pederson
 President/ CEO
RPederson@LTCdrilling.com
 (832) 818 - 4390

Jaime Lopez
 R&D L-MWD Shop Manager
JLopez@LTCdrilling.com
 (936) 689 - 4232

Paul Albers
 L-MWD Operations
PAIbers@LTCdrilling.com
 (832) 229 - 5987

Paul Redfield
 Sales
PRedfield@LTCdrilling.com
 (281) 928 - 6322