




Anchoring your position

GRIP™ TT

RX

- Unique knob design
- Enhanced tip tapering
- Stabilized position
- Ultra puncture resistance

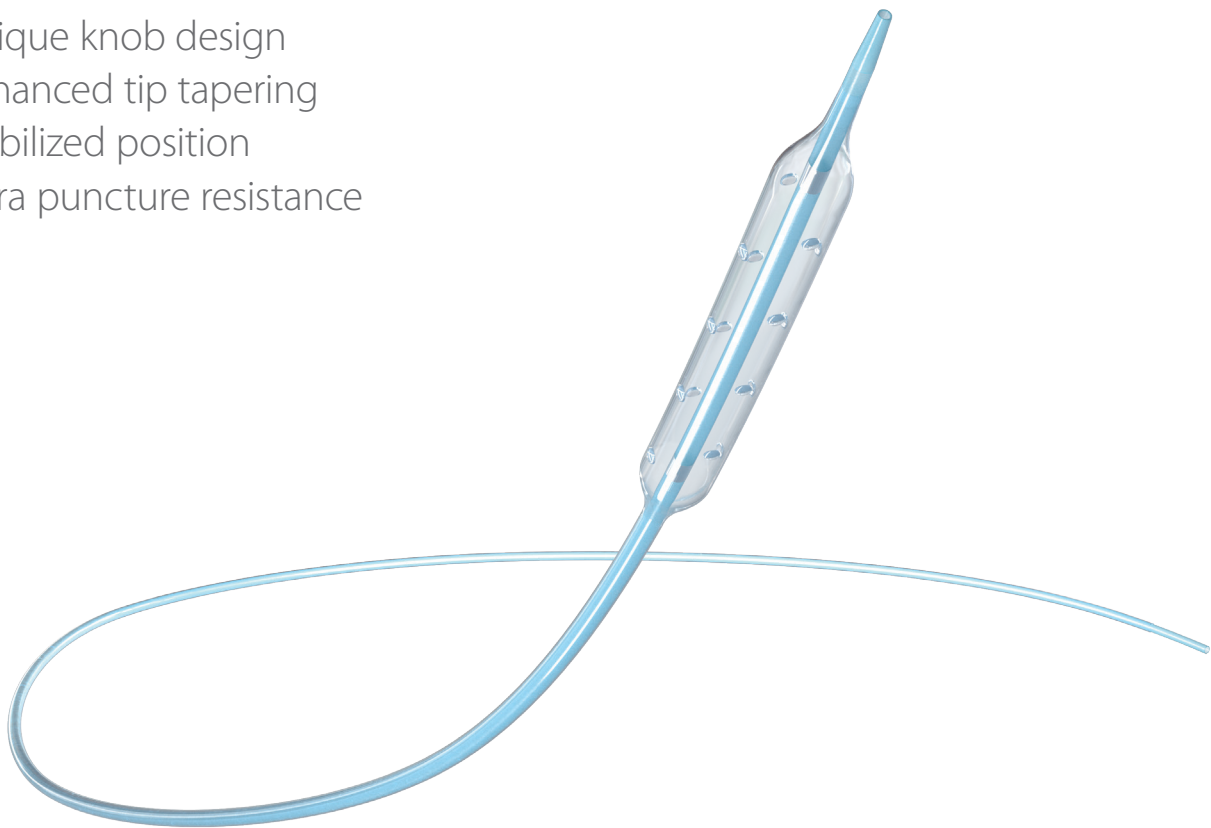


"Fixation" knob

4 mm tip

High RBP up to 21 Atm

Low entry
profile 0.017"

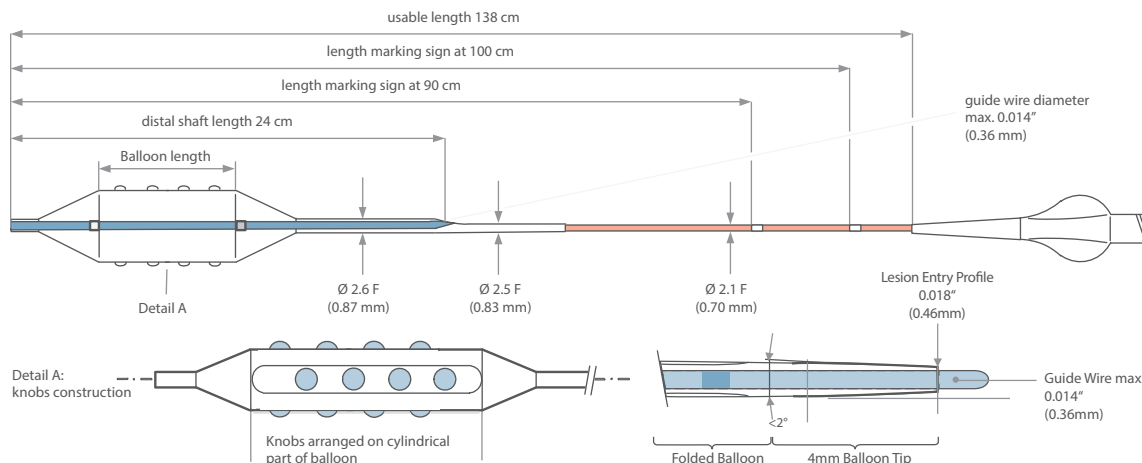

Ordering Information / Technical Information

GRIP™ TT

Reference	Balloon Diameter	Balloon Length	Marker	Tip Length	Entry Profile	Max. Guidewire	Usable Length	Min. Guide Catheter / ID
250080660	2.5 mm	8 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
250120660	2.5 mm	12 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
250160660	2.5 mm	16 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
300080660	3.0 mm	8 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
300120660	3.0 mm	12 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
300160660	3.0 mm	16 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
350080660	3.5 mm	8 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
350120660	3.5 mm	12 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
350160660	3.5 mm	16 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
400080660	4.0 mm	8 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
400120660	4.0 mm	12 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"
400160660	4.0 mm	16 mm	2	4 mm	0.017"	0.014"	138 cm	5 F / 0.056"

Control your Size



The balloon material is a semi-compliant polyamide, providing a 'Work Your Size'.

Balloon Ø	Atm 6	Atm 8	Atm 10	Atm* 11	Atm 12	Atm 14	Atm 16	Atm** 18	Atm** 19	Atm** 20	Atm** 21	Atm 22
2.5 mm	2.30 mm	2.37 mm	2.45 mm	2.50 mm	2.54 mm	2.62 mm	2.68 mm	2.73 mm	2.75 mm	2.77 mm	2.79 mm	2.81 mm
3.0 mm	2.76 mm	2.84 mm	2.94 mm	3.00 mm	3.05 mm	3.14 mm	3.22 mm	3.27 mm	3.30 mm	3.33 mm	3.36 mm	3.38 mm
3.5 mm	3.19 mm	3.31 mm	3.44 mm	3.50 mm	3.56 mm	3.67 mm	3.76 mm	3.83 mm	3.87 mm	3.90 mm	3.93 mm	
4.0 mm	3.65 mm	3.78 mm	3.91 mm	4.00 mm	4.07 mm	4.19 mm	4.29 mm	4.37 mm	4.41 mm	4.45 mm		

Atm* Nominal Pressure (NP)

Atm** Rated Burst Pressure (RBP)

Anchoring your position

