

# RESIDENTIAL LOCK

THE FINEST LOCK



**Taiwan Head Office & Factories :**

· Established in 1954

- Major Products :  
Residential Lock (Cylindrical lock, Tubular lock .Deadbolt lock,  
Mortise lock.Handkeset).  
Electronic Lock 、 Door Closer.
- Production Capacity :  
Hundreds of thousands locksets per month.
- Primary Functions :  
R&D department, New product trial run and launch base,  
High value added product manufacturing base.

**Philippines Factory :**

· Established in 1997

- Major Products :  
Residential Lock (Cylindrical lock, Tubular lock, Deadbolt lock.
- Production Capacity :  
Over one million locksets per month.
- Primary Functions :  
Production center of light duty lockset.



**CONTENTS**


02	GRADE 2 SERIES	RESIDENTIAL DEADBOLT LOCK
04	GRADE 2 SERIES	RESIDENTIAL TUBULAR LEVERSET / KNOBSET
06	GRADE 2 SERIES	ENTRANCE HANDLESET
07	SANDCAST SERIES	DEADBOLT LOCK
08	SANDCAST SERIES	LEVERSET & KNOBSET
10	SANDCAST SERIES	INTERCONNECTED ENTRANCE HANDLESET
12	M SERIES	EURO MORTISE LOCK
14	H SERIES	INTERCONNECTED ENTRANCE HANDLESET
16	H SERIES	SOLID FORGED BRASS ENTRANCE HANDLESET
18	Z SERIES	ZINC DIE-CASTING ENTRANCE HANDLESET
20	CONTEMPORARY SERIES	ZINC DIE-CASTING ENTRANCE HANDLESET
21	CONTEMPORARY SERIES	INTERCONNECTED ENTRANCE LEVERSET
22	CONTEMPORARY SERIES	ZINC DIE-CASTING LEVERSET
24	CONTEMPORARY SERIES	RESIDENTIAL TUBULAR LEVERSET
26	CONTEMPORARY SERIES	ZINC DIE-CASTING DEADBOLT
27	TL SERIES	GRADE 3 RESIDENTIAL TUBULAR LEVERSET
30	GK SERIES	RESIDENTIAL LEVERSET
32	TA SERIES	GRADE 3 RESIDENTIAL TUBULAR KNOBSET
34	N SERIES	GRADE 3 RESIDENTIAL CYLINDRICAL KNOBSET
36	NE SERIES	GRADE 3 CYLINDRICAL LEVERSET
38	MOBILE HOME LOCK	GRADE 3 MOBILE HOME LOCK
39	L SERIES	GRADE 3 RESIDENTIAL DEADBOLT LOCK
42	JT SERIES	LEVER HANDLE
44	LJ SERIES	DEADBOLT LOCK
46	JB SERIES	LEVER HANDLE
49	Additional Information	

## RESIDENTIAL DEADBOLT LOCK



### LU-20S10

Single Cylinder  
US15

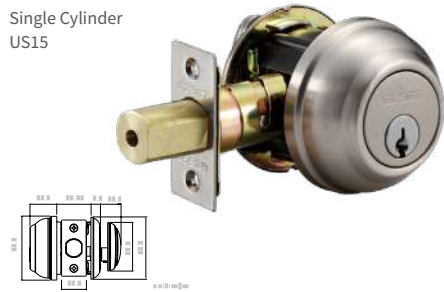


### LU-20S11

Double Cylinder  
US15




### LU-30S10

Single Cylinder  
US15

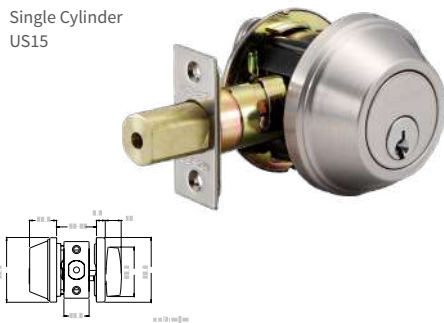

### LU-30S11

Double Cylinder  
US15

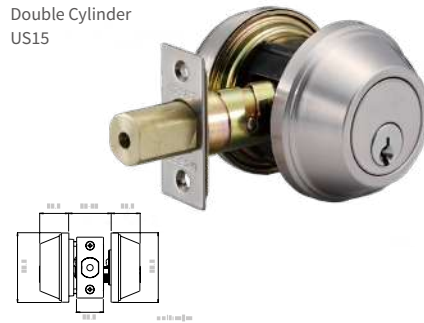

### Thumb Turn

Sub Assembling Turn  
Zinc Die-Casting Type  
Exposed Screws



### Thumb Turn

Sub Assembling Turn  
Zinc Die-Casting Type  
Exposed Screws



### Thumb Turn

Sub Assembling Turn  
Zinc Die-Casting Type  
Concealed Screws



## SPECIFICATIONS

### Exposed Trim

Brass or stainless steel.

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.

2" (51mm) optional.

### Strike

LM. Rectangular strike with door reinforcer.

1-1/8" x 2-3/4" x 5/64" (28.4mm x 69.8mm x 2.0mm) square corner standard.

Other strikes are available upon request.

### Latch

2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Faceplate : 1" x 2-1/4" (25.4mm x 57.0mm).

Specify round corner, square corner or drive-in.

Bolt: Solid brass full 1" (25.4mm) throw deadbolt, with hardened steel rod insert

### Cylinder

5 pin solid brass Kwikset Keyway (standard) with black powder metallurgy cylinder housing.

Other keyways are available upon request.

### Finishes

US3, US5, US15, US26D, US32, US32D, 12P, LO3

Other finishes are available upon request.

## CERTIFICATION

### ANSI

ANSI/BHMA A156.5-2001 Grade 2 certified.

### UL

3 hours fire rating certified. UL File No. R15047


## FUNCTION

EZ Code	ANSI Code	Description
10	E0152	Single Cylinder
11	E0142	Double Cylinder
12	E0172	Classroom
13	E0163	One-Way (Key Type)
50	E0192	One Side Dearbolt
70	E01112	One Side Deadbolt (Non-Key)

## PACKAGE

Model	Pcs/Ctn	MEAS.
LU Series	Box Pack	20 0.66cu.ft.
	Clam Shell	10 0.70cu.ft.

## ORDERING INFORMATION

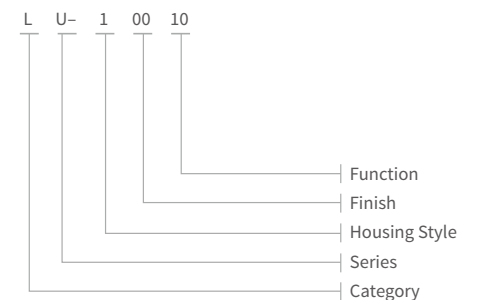

# Grade2 SERIES

## RESIDENTIAL TUBULAR LEVERSET / KNOBSET


- 6-Way latch
- Anti-pick pin
- Auto release function

- Protection sleeve design
- Concealed mounting screws
- Reversible or non-handed design




### TT-J0S00

JR(Juran)  
Entry  
US15




### TT-R0S00

RZ(Ritz)  
Entry  
US15




### TT-S0S00

SD (Sandiego)  
Entry  
US15




### TT-Q0S00

QN(Queen)  
Entry  
US15




### TT-V0S00

VR(Verona)  
Entry  
US15




### TT-D0S00

DE (December)  
Entry  
US15



### TT-70S00

PE(Palace)  
Entry  
US15



## SPECIFICATIONS

### Door Thickness

1-3/8" to 1-3/4"(35mm ~ 45mm) standard.  
2"(51mm) optional.

### Strike

9103J. Full Lip Strike 1-3/4" x 2-1/4" x 5/64"  
(44.4mm x 57.0mm x 2.0mm) round corner standard.  
Other strikes are available upon request.

### Latch

2-3/8" and 2-3/4" adjustable.(60mm and 70mm)  
Faceplate : 1" x 2-1/4"(25.4mm x 57.0mm) .  
Specify round corner, square corner or drive-in.  
Latch Bolt : Stainless steel powder metallurgy latch bolt  
with 1/2"(12.7mm) throw.

### Cylinder

5 pin Kwikset keyway(standard) which includes two  
anti-picking pin.  
Other keyways are available upon request.

### Door Handing

Reversible lever or non-handed design suitable for both  
right and left hand door.

### Finishes

US3, US5, US10B, US15, US26, US26D, US32(for  
knobsets only) ,US32D(for knobsets only) , 12P  
Other finishes are available upon request.

## CERTIFICATION

### ANSI

ANSI/BHMA A156.2-2003 Grade 2 certified.


### UL

3 hours fire rating certified. UL File No. R13776

## FUNCTION

EZ Code	ANSI Code	Description
00	F82B	Entry/Office
30	F76B	Privacy
62	F86	Storeroom
78	-	Single Dummy - 2 Screws
82	F75	Passage

## ORDERING INFORMATION

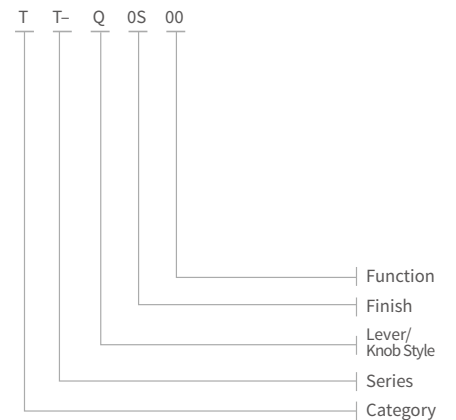


# Grade2 SERIES

- 6-Way latch
- Protection sleeve design
- Concealed mounting screws

## ENTRANCE HANDLESET

### HUT30S10

MA (Mayfair) Handle  
BA (Bala) Knob S  
Single Cylinder / US15




#### FUNCTION

EZ Code	Description
10	Sectional Handleset With Single Cylinder Deadbolt
11	Sectional Handleset With Double Cylinder Deadbolt
75	Sectional Dummy Handleset With Dummy Deadbolt

#### PACKAGE

Model	Pcs / Ctn	MEAS.
HU	Windows Pack	4
	Box Pack	10
		2.62 cu.ft.
		1.97 cu.ft.

#### ORDERING INFORMATION

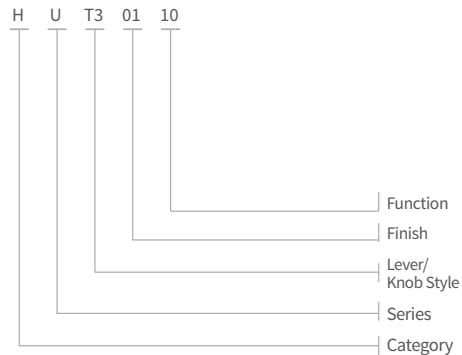


# SANDCAST SERIES

- Protection sleeve design
- Metallurgy cylinder housing

## DEADBOLT LOCK

### LE-21410

EY(Eternity) Escutcheon  
Single Cylinder  
502 / Aged Pewter



#### SPECIFICATIONS

##### Exposed Trim

Cast brass.

##### Door Thickness

Fits 1-3/8" to 2" (35mm ~ 51mm) standard.

##### Backset

Fits both 2-3/8" or 2-3/4" (60mm or 70mm) .

##### Strike

9111. Rectangular Strike 1-1/8" x 2-3/4"  
(28.4mm x 69.8mm) round corner standard.  
Other strikes are available upon request.

##### Latch

2-3/8" and 2-3/4" adjustable. (60mm and 70mm)  
Faceplate : 1" x 2-1/4" (25.4mm x 57mm) round corner standard. Square corner optional.

Latch bolt : Solid brass with hardened steel rod insert,  
full 1" (25.4mm) throw.

##### Cylinder


6 pin Schlage "C" keyway (standard) with black powder metallurgy cylinder housing.  
5 pin Kwikset keyway(optional).  
Other keyways are available upon request.

##### Finishes

502 (Aged Pewter), 506 (Aged Black), 12P(Satin Oxidized Bronze)

### LG-23910

GA(Gaea) Escutcheon  
Single Cylinder  
12P




#### FUNCTION

EZ Code	Description
10	Single Cylinder
11	Double Cylinder

#### PACKAGE


Model	Pcs/Ctn	MEAS.
Deadbolt Series	Box Pack	12
		0.69 cu.ft.

#### ORDERING INFORMATION

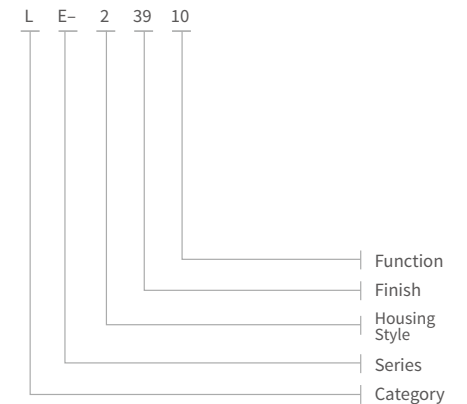


### AD-D3900

JR(Juran)  
Entry  
12P




### AD-D5982

DY (Daisy) Escutcheon  
DS (Dallas) Lever  
Passage  
506 / Aged Black




### AD-E1482

DY (Daisy) Escutcheon  
ER (Emperor) Lever  
Passage  
502 / Aged Pewter




### AG-E5982

GA(Gaea) Escutcheon  
ER (Emperor) Lever  
Passage  
506 / Aged Black




### AG-D1482

GA (Gaea) Escutcheon  
DS (Dallas) Lever  
Passage  
502 / Aged Pewter




### AG-D3900

GA (Gaea) Escutcheon  
DS (Dallas) Lever  
Entry  
12P




### AD-21482

DY(Daisy) Escutcheon  
CS (Cpsule) Knob  
Passage  
502 / Aged Pewter




### AD-31482

DY(Daisy) Escutcheon  
FB (Frisbee) Knob  
Passage  
502 / Aged Pewter



### AG-11430

GA(Gaea) Escutcheon  
OW(Owen) Knob  
Privacy  
502 / Aged Pewter



## SPECIFICATIONS

### Exposed Trim

Cast brass.

### Door Thickness

Fits 1-3/8" to 2" (35mm ~ 51mm) standard.

### Strike

9103J. Full Lip Strike 1-3/4" x 2-1/4"  
(44.4mm x 57.0mm)round corner standard.  
Other strikes are available upon request.

### Latch

2-3/8" and 2-3/4" adjustable. (60mm and 70mm)  
Faceplate : 1" x 2-1/4" (25.4mm x 57mm) round corner standard. Square corner optional.  
Latch bolt : Solid brass latch bolt with 1/2" (12.7mm) throw.

### Door Handing

Knobset : Non-handed.  
Leverset : Specify handing when ordering.

### Cylinder

5 pin solid brass cylinders. 6 pin cylinder optional.  
Kwikset keyway standard. Other keyways are available upon request.

### Finishes

502 (Aged Pewter), 506 (Aged Black), 12P(Satin Oxidized Bronze)


## FUNCTION

EZ Code	Description
00	Entry
30	Privacy
78	Single Dummy - 2 Screws
82	Passage

## PACKAGE

Model	Pcs/Ctn	MEAS.
Lever Series	Box Pack	6 0.62 cu.ft.
Knob Series	Box Pack	6 0.62 cu.ft.

## ORDERING INFORMATION

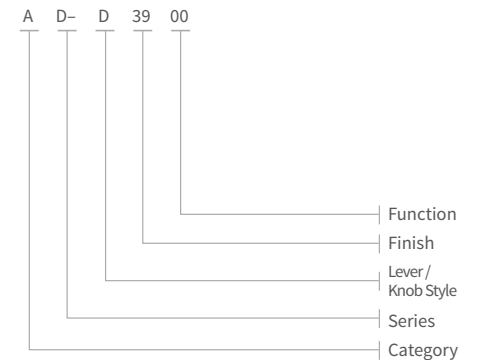




## INTERCONNECTED ENTRANCE HANDLESET


### HE-D1410

EY (Eternity) Handle  
DS (Dallas) Lever  
Single Cylinder  
502 / Aged Pewter




### HD-D3910

HD-D3910  
DY(Daisy) Handle  
DS (Dallas) Lever  
Single Cylinder  
12P




### HL-D1410

LV (Liverpool) Handle  
DS(Dallas) Lever  
Single Cylinder  
502 / Aged Pewter



### HG-D5910

GA(Gaea) Handle  
DS (Dallas) Lever  
Single Cylinder  
506 / Aged Black



## SPECIFICATIONS

### Exposed Trim

Cast brass.

### Door Thickness

Fits 1-3/8" to 2" (35mm ~ 51mm) standard,  
2-1/4"(57mm) optional

### Backset

Fits both 2-3/8" or 2-3/4" (60mm or 70mm) .

### Mounting Bore Distance

5-1/2" (139.7mm) center to center.

### Latch

Deadbolt latch : 2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Faceplate : 1" x 2-1/4" (25.4mm x 57mm) round corner standard. Square corner optional.

Bolt : Solid brass with hardened steel rod insert, full 1" (25.4mm) throw.

Spring latch : 2-3/8" and 2-3/4" adjustable.(60mm and 70mm)

Faceplate : 1" x 2-1/4" (25.4mm x 57mm) round corner standard. Square corner optional.

Latch bolt : Solid brass latch bolt with 1/2" (12.7mm) throw.throw.

### Strike

Upper : 9111. Rectangular Strike 1-1/8" x 2-3/4" (28.4mm x 69.8mm) round corner standard.

Lower : 9103J. Full Lip Strike 1-3/4" x 2-1/4" (44.4mm x 57.0mm) round corner standard.

Other strikes are available upon request.

### Cylinder

6 pin Schlage "C" keyway (standard) with black powder metallurgy cylinder housing.

Other keyways are available upon request.

### Door Handing

Knob : Non-handed.

Lever : Specify handing when ordering lever as interior.

### Finishes

502 (Aged Pewter), 506 (Aged Black), 12P(Satin Oxidized Bronze)


## FUNCTION

EZ Code	Description
10	Single Cylinder Deadbolt
75	Dummy

## PACKAGE

Model		Pcs/Ctn	MEAS.
Handleset Series	Box Pack	2	1.48 cu.ft.


## ORDERING INFORMATION

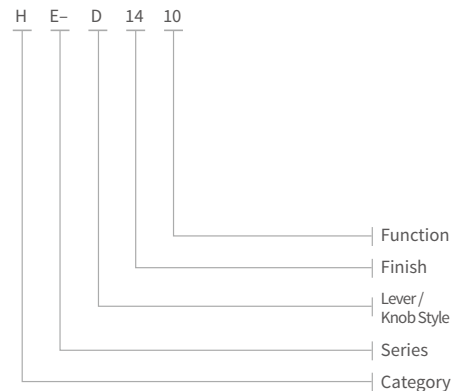

## EURO MORTISE LOCK


### MF-F0110

Solid forged brass  
FZ(Firenze)Escutcheon  
FE(Fascinate)Lever  
Single Cylinder  
US3



### MS-A0610

Solid brass  
SE(Seattle)Escutcheon  
AP(Apollo)Lever  
Single Cylinder  
US5




### MS-S0010

Stainless steel  
SE(Seattle)Escutcheon  
SO(Scorpio)Lever  
Single Cylinder  
US32D



### MN-T0010

Stainless steel  
NP(Napoleon)Escutcheon  
TS(Tarurs)Lever  
Single Cylinder  
US32D



## SPECIFICATIONS

### Exposed Trim

Solid forged brass or stainless steel.

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.

2" (51mm) optional.

### Backset

Available in 2-3/8" or 2-3/4" backset.

(60mm or 70mm)

### Mounting Bore Distance

3-1/3" (85mm) center to center.

### Strike

MF-F, T strikes 1" x 8-1/16"

(25.4mm x 205mm) square corner.

Other strikes are available upon request.

### Faceplate

Solid brass or stainless steel.

7/8" x 9-7/17" (22mm x 240.0mm) square corner.

### Latch Bolt

Latchbolt : Solid brass or stainless steel latch bolt with 1/2" (12mm) throw.

Deadbolt : Solid brass or stainless steel latch bolt with 27/32" (21.0mm) throw..

### Cylinder

Euro profile 71mm cylinder with solid brass 6-pin Corbin

"A1" keyway(standard) .

Other keyways are available upon request.

High security cylinder(CM/ CX) also available.

Available in 63mm, 90mm or 110mm cylinder housing

### Door Handing

Handed levers(specify when ordering)

### Finishes

US3, US5, US11, US15, US26, US26D,

US32(for stainless steel series only) ,

US32D(for stainless steel series only) , LO3

Other finishes are available upon request.


## FUNCTION

EZSET Code	Description
10	Single Cylinder with Thumb Turn / Entrance Lock
11	Double Cylinder
30	Privacy Lock
62	Single Cylinder with Thumb Turn/ Storeroom Lock
75	Single Dummy Trim
77	Pair Dummy Trim

## PACKAGE

Model	Pcs/Ctn	MEAS.
M Series	Box Pack	6 1.2 cu.ft.

## ORDERING INFORMATION

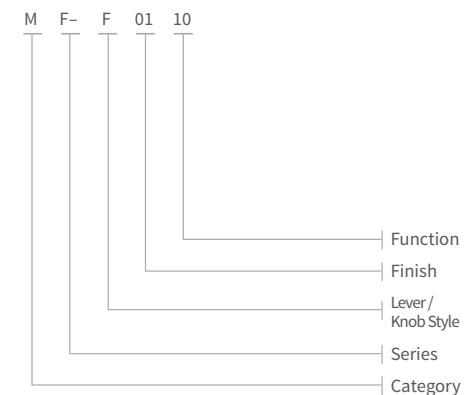




## INTERCONNECTED ENTRANCE HANDLESET


### HXBR0110

Solid Forged Brass  
CH (Chateau) Handle  
RZ (Ritz) Lever  
Single Cylinder  
US3



### HNBO0510

Solid Forged Brass  
RI (Richmond) Handle  
QN (Queen) Lever  
Single Cylinder  
US15



### FUNCTION

EZ Code	Description
10	Single Cylinder Deadbolt
75	Dummy Deadbolt

### PACKAGE

Model	Pcs/ Ctn	MEAS.
Window Box	4	2.62cu.ft.
Handleset Series		
Box Pack	6	1.59cu.ft.

### SPECIFICATIONS

#### Exposed Trim

Solid forged brass

#### Door Thickness

Fits 1-3/8" to 2" (35mm ~ 51mm) standard.

#### Mounting Bore Distance

5-1/2" (139.7mm) center to center

#### Latch

Deadbolt latch: 2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Faceplate: 1" x 2-1/4" (25.4mm x 57mm) square corner standard. Round corner optional.

Bolt: Solid brass/Steel with hardened steel rod insert, full 1" (25.4mm) throw. Steel latch bolt optional.

Spring latch: 2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Faceplate: 1" x 2-1/4" (25.4mm x 57mm) square corner standard. Round corner optional.

Bolt: Solid brass / Zinc latch bolt with 1/2" (12.7mm) throw.

#### Strike

Upper : 9111. Rectangular Strike 1-1/8" x 2-3/4" (28.4mm x 69.8mm) round corner standard.

Lower : 9103J. Full Lip Strike 1-3/4" x 2-1/4" (44.4mm x 57.0mm) round corner standard.

Other strikes are available upon request.

#### Cylinder

5 pin Kwikset keyway (standard)

Other keyways are available upon request.

High security cylinder (CM/ CX keyway) also available.

#### Door Handing


Lever : Specify handing when ordering lever as interior

#### Finishes

US3, US5, US10B, US15, US26, US26D, 12P, LO3

Other finishes are available upon request.


### ORDERING INFORMATION

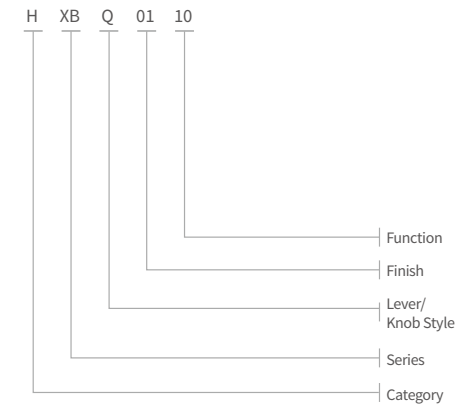

## SOLID FORGED BRASS ENTRANCE HANDLESET

### HU-30S10

MA(Mayfair)  
US15

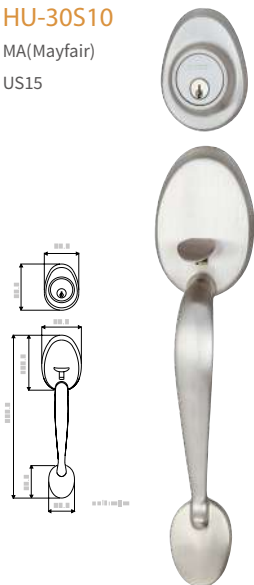

### HC-30R10

CA(Capri)  
US26



### HN-Z0Y10

RI(Richmond)  
LO3



### HI-33910

IM(Imperial)  
12P



### HX-Z0Y10

CH(Chateau)  
LO3



## Interior Selection

### Lever

Solid Brass  
AK-Q



### Lever

Zinc Alloy  
TL-L



### Knob

Solid Brass  
HN-Z



Brass  
TA-2



TL-R



TQC



TA-3



TA-5



## SPECIFICATIONS

### Exposed Trim

Solid forged brass, plated to match finish designation.

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.  
2" (51mm) optional.

### Strike

Upper : 9111. Rectangular Strike 1-1/8" x 2-3/4" (28.4mm x 69.8mm) square corner standard.  
Lower : 9102J. Full Lip Strike 1-3/4" x 2-1/4" (44.4mm x 57.0mm) square corner standard.  
Other strikes are available upon request.

### Latch

Deadbolt latch: 2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Faceplate: 1" x 2-1/4" (25.4mm x 57mm) square corner standard. Round corner optional.

Bolt: Solid Brass/Steel with hardened steel rod insert, full 1" (25.4mm) throw. Steel latch bolt optional.

Spring latch: 2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Faceplate: 1" x 2-1/4" (25.4mm x 57mm) square corner standard. Round corner optional.

Bolt: Solid brass / Zinc latch bolt with 1/2" (12.7mm) throw.

### Cylinder

5 pin Kwikset keyway (standard)

Other keyways are available upon request.

High security cylinder (CM/ CX) also available.

### Door Handing

Knob : Non-handed.

Lever: Specify handing when ordering lever as interior.

Non-handed also available

### Finishes

US3, US5, US10B, US15, US26, US26D, 12P, LO3

Other finishes are available upon request.


## FUNCTION

EZ Code	Description
10	Single Cylinder Deadbolt
11	Double Cylinder Deadbolt
75	Dummy

## PACKAGE

Model		Pcs/ Ctn	MEAS.
Handleset Series	Window Box	6	2.59 cu.ft.
	Box Pack	10	1.93 cu.ft.


## ORDERING INFORMATION

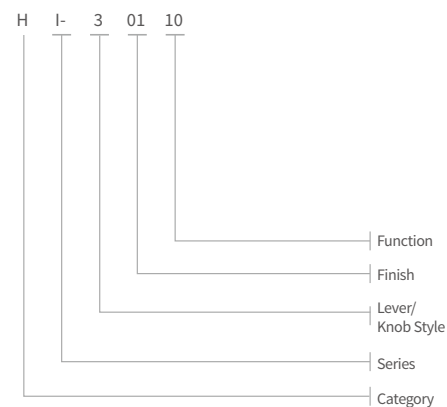

## ZINC DIE-CASTING ENTRANCE HANDLESET


### ZB-30610

BI(Biarritz)  
US5




### ZC-33910

CA(Capri)  
12P



### ZDP00610

PE(Peacock)  
Double Cylinder  
Double Handle  
US5



### ZI-30S10

IM(Imperial)  
US15





### ZU-30110

MA(Mayfair)  
US3



Model	A	B	C
ZDP	296	57	172
ZDL	273	53	155
ZDV	274	57	155

Model	D	E
ZDA	350	185
ZDG	374	185



## SPECIFICATIONS

### Exposed Trim

Zinc alloy.

### Door Thickness

1-3/8" to 1-3/4"(35mm ~ 45mm)standard.

2"(51mm)optional.

### Strike

Upper : 9111. Rectangular Strike 1-1/8" x 2-3/4"

(28.4mm x 69.8mm)square corner standard.

Lower : 9102J.Full Lip Strike1-3/4" x 2-1/4"

(44.4mmx57.0mm)square corner standard.

Other strikes are available upon request.

### Latch

Deadbolt latch : 2-3/8" and 2-3/4" adjustable.

(60mm and 70mm)

Faceplate : 1" x 2-1/4" (25.4mmx57mm) square corner

standard. Round corner optional.

Bolt : Steel with hardened steel rod insert , Full 1"

(25.4mm) throw deadbolt.

Spring latch : 2-3/8" and 2-3/4" adjustable.

(60mm and 70mm)

Faceplate : 1" x 2-1/4" (25.4mm x 57mm) square corner

standard. Round corner optional.

Bolt : Zinc alloy latch bolt with 1/2"(12.7mm)throw.

Nickel plated.

### Cylinder

5 pin Kwikset keyway standard, with zinc alloy cylinder housing.

Other keyways are available upon request.

High security cylinder(CM/ CX)also available.

### Door Handing

Knob : Non-handed.

Lever : Specify handing when ordering lever as interior.

### Finishes

US3, US5, US10B, US15, US26, US26D, 12P

Other finishes are available upon request.


## PACKAGE

Model		Pcs/ Ctn	MEAS.
Single Handle	Window Box	6	2.59 cu.ft.
	Box Pack	10	1.97 cu.ft.
ZDA / ZDG Double Handle	Box Pack	10	2.07 cu.ft.
ZDP / ZDL / ZDV Double Handle	Box Pack	12	1.76 cu.ft.

## FUNCTION

EZ Code	Description
10	Sectional Handleset With Single Cylinder Deadbolt
11	Sectional Handleset With Double Cylinder Deadbolt
75	Sectional Dummy Handleset With Dummy Deadbolt

## ORDERING INFORMATION

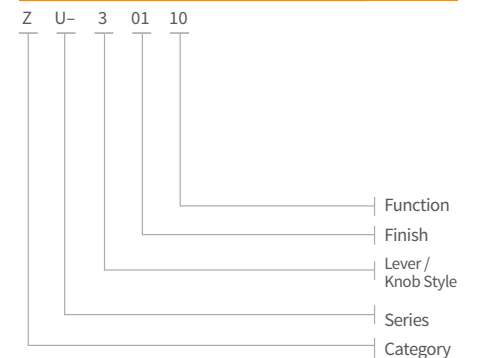


# CONTEMPORARY SERIES

- Interchangeable interior design
- Zinc die-casting entrance handlest

## ZINC DIE-CASTING ENTRANCE HANDLEST

### ZG-M0S10

Zinc Die-Casting  
Single Cylinder  
US15

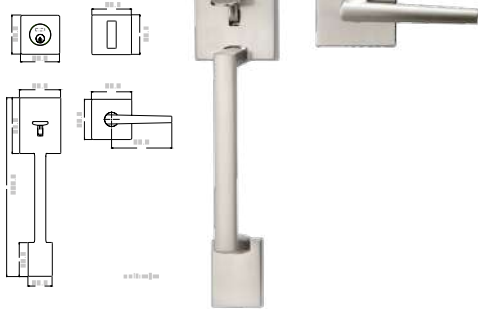


#### FUNCTION

EZ	Description
10	Single Cylinder Deadbolt

#### PACKAGE

Model	Pcs/Ctn	MEAS.
Handlest Series	Box Pack	2 1.48 cu.ft.

#### ORDERING INFORMATION

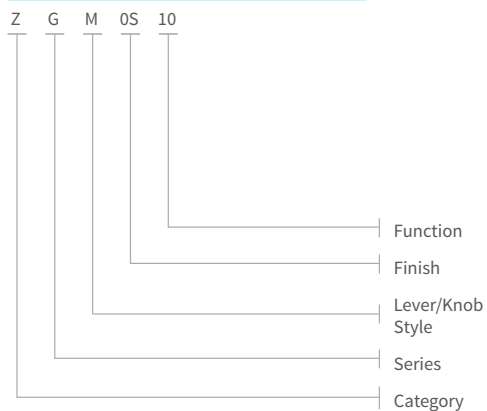

#### SPECIFICATIONS

##### Exposed Trim

Zinc alloy.

##### Door Thickness

Fits 1-3/8" to 1-3/4" (35mm~45mm) standard. 2" (51mm) optional.

##### Backset

Fits both 2-3/8" or 2-3/4" (60mm or 70mm)

##### Strike

Upper:9111.Rectangular Strike 1-1/8" x 2-3/4"(28.4mm x 69.8mm) square corner standard.

Lower:9102J. Full Lip Strike 1-3/4" x 2-1/4"(44.4mm x 57mm) square corner standard.

##### Latch

Deadbolt latch:2-3/8" or 2-3/4" (60mm / 70mm) adjustable latch

Faceplate:1" x2-1/4" (25.4mm x 57mm) square corner standard. Round corner optional.

Bolt:Steel with hardened steel rod insert, full 1" (25.4mm ) throw.

Spring latch:2-3/8" or 2-3/4"(60mm / 70mm).

Bolt: Zinc alloy latch bolt with 1/2"(12.7mm) throw.

##### Cylinder

5-pin Kwikset keyway

High security cylinder (CM, CX keyway) also available.

##### Finishes

US3, US10B, US15, US26, US26D, 12P,

Other finishes are available upon request.


# CONTEMPORARY SERIES

- Interconnected function
- Interchangeable interior design

## INTERCONNECTED ENTRANCE LEVERSET

### IPM0S82

Zinc Die-Casting  
Single Cylinder  
US15

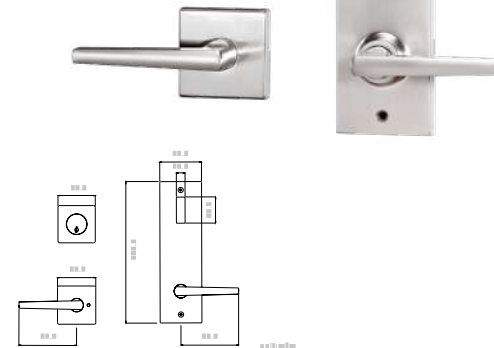


#### FUNCTION

EZ	Description
82	Single Locking-Passage Lever

#### PACKAGE

Model	Pcs/Ctn	MEAS.
Interconnected	Box Pack	2 1.48 cu.ft.

#### ORDERING INFORMATION

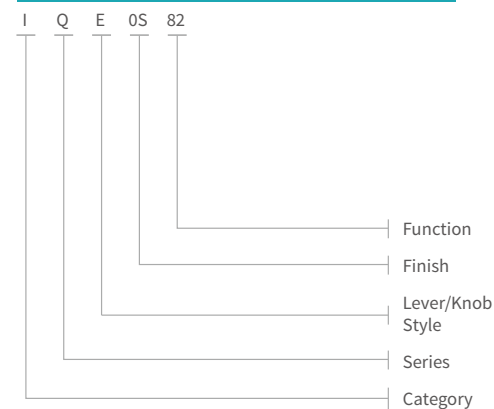

### IQE0S82

Stainless steel  
Single Cylinder  
US15



#### SPECIFICATIONS

##### Exposed Trim

Wrought brass or stainless steel or Zinc alloy.

##### Door Thickness

Fit 1-5/8" to 2" (40mm ~ 51mm)

##### Strike

Upper:9111. Rectangular Strike 1-1/8" x 2-3/4"(28.4mm x 69.8mm) square corner standard.

Lower:9102J. Full Lip Strike 1-3/4" x 2-1/4"(44.4mm x 57mm) square corner standard.

##### Latch

Deadbolt latch:2-3/8" or 2-3/4" (60mm / 70mm) adjustable latch.

Faceplate:1" x2-1/4" (25.4mm x 57mm) square corner standard. Round corner optional.

Bolt: Steel with hardened steel rod insert, full 1"(25.4mm) throw.

Spring latch: 2-3/8" or 2-3/4"(60mm/70mm).

Bolt: Zinc alloy latch bolt with 1/2"(12.7mm) throw.

##### Cylinder

5-pin Kwikset keyway.

High security cylinder (CM, CX keyway) also available.

##### Finishes

US3, US10B, US15, US26, US26D, 12P,

Other finishes are available upon request.


# CONTEMPORARY SERIES

## ZINC DIE-CASTING LEVERSET

- Concealed mounting screws
- Auto release function (for privacy lock)


### AM-10S30

GF (Golf)  
Privacy  
US15




### AM-20S82

CA (Circa)  
Passage  
US15




### AMS-50R30

YK (York)  
Privacy  
US26




### AM-10S78

GF (Golf)  
Dummy  
US15




### AMS-30S82

AN (Austin)  
Passage  
US15



### AM-60S82

SY (Sydney)  
Passage  
US15



## FUNCTION

EZ Code	Description
30	Privacy
78	Single Dummy - 2 Screws
82	Passage

## PACKAGE

Model	Pcs/Ctn	MEAS.
Box Pack	10	0.92 cu.ft.
Clam Shell	10	0.84 cu.ft.

## ORDERING INFORMATION

A	M-	1	OS	82	
					Function
					Finish
					Lever Style
					Series
					Category

## SPECIFICATIONS

### Exposed Trim

Wrought brass or stainless steel or Zinc alloy.

### Door Thickness

1-3/8" to 2" (35mm ~ 51mm) standard.

### Strike

9103J. Full Lip Strike 1-3/4" x 2-1/4"

(44.4mm x 57.0mm) square corner standard.

Other strikes are available upon request.

### Latch

2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Faceplate: 1" x 2-1/4" (25.4mm x 57mm)

square corner standard. Round corner optional.

Bolt: 1/2" (12.7mm) throw. Solid brass, stainless steel or zinc alloy latch bolt also available.

### Door Handing

Non-handed

### Finishes

US3, US10B, US15, US26, US26D, 12P,

Other finishes are available upon request.


# CONTEMPORARY SERIES

- Concealed/exposed mounting screws
- Reversible or non-handed design
- Auto release function (optional)

## RESIDENTIAL TBULAR LEVERSET


### TMSM20S00 MN (Madison)

Entry  
US15




### TMSM20S30 MN (Madison)

Privacy  
US15




### TMSLS0S82 ST (Stamford)

Passage  
US15




### TMSM20S82 MN (Madison)

Passage  
US15




### TMSLR0S00 RN (Reno)

Entry  
US15




### TMSLR0S30 RN (Reno)

Privacy  
US15




### TMSLR0S82 RN (Reno)

Passage  
US15




### TMSLS0S00 ST (Stamford)

Entry  
US15



### TMSLS0S30 ST (Stamford)

Privacy  
US15



## SPECIFICATIONS

### Exposed Trim

Rose: wrought brass or stainless steel;

Lever: zinc-die casting.

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm)

### Door Prep

Ø 54mm for cross bore; Ø 25mm for edge bore

### Strike

Full Lip Strike 1-3/4" x 2-1/4" (44.4mm x 57.0mm).

### Latch

2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Bolt: zinc alloy with 1/2" (12.7mm) throw. Nickel plated.

### Cylinder

5 pin Kwikset Keyway (standard).

Other keyways are available upon request.

### Installation Methods

Concealed/exposed.

### Auto Release

Available upon request.

### Door Handling

Non-handed

### Finishes

US3, US5, US10B, US15, US26, US26D, 12P.


## FUNCTION

EZ Code	Description
00	Entry
30	Privacy
78	Single Dummy - 2 Screws
82	Passage

## PACKAGE

Model	Pcs/Ctn	MEAS.	Carton
Box Pack	10	0.96 cu.ft.	General Carton
TTB Series			
Clam Shell	10	1.07 cu.ft.	General Carton
Clam Shell	6	0.69 cu.ft.	Cut Case

## ORDERING INFORMATION

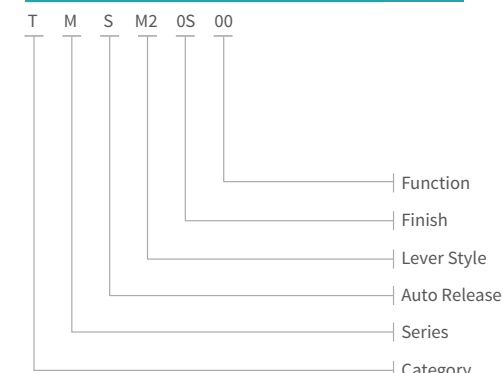




# CONTEMPORARY SERIES

- Concealed mounting screws
- Auto release function (for privacy lock)

## ZINC DIE-CASTING DEADBOLT

### LTR0S10


Single Cylinder  
US15



#### FUNCTION


EZ Code	Description
10	Single Cylinder
11	Double Cylinder
50	One Side Deadbolt

#### ORDERING INFORMATION

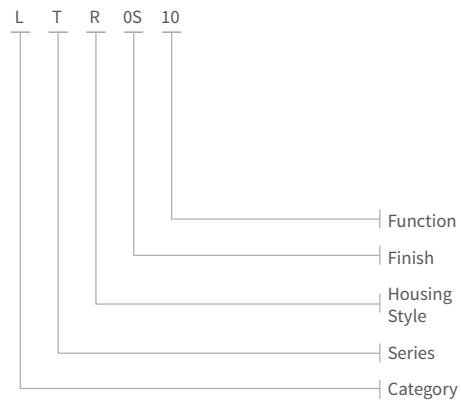

### LTS0S10

Single Cylinder  
US15



#### PACKAGE

Model		Pcs / Ctn	MEAS.
LTR/LTS Series	Box Pack	12	0.45 cu.ft.
LTR/LTS Series	Clam Shell	10	0.83 cu.ft.

#### SPECIFICATIONS

##### Exposed Trim

Wrought brass or stainless steel or Zinc alloy.

##### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard. 2" (51mm) optional.

##### Strike

9112 / 9113. Rectangular Strike 1" x 2-1/4" (25.4mm x 57.0mm) square corner standard. Other strikes are available upon request.

##### Latch

2-3/8" and 2-3/4" adjustable. (60mm and 70mm)  
Bolt: steel latch with hardened steel rod insert, full 1" (25.4mm) throw

##### Cylinder

5-pin Kwikset keyway

##### Finishes


US3, US10B, US15, US26, US26D, 12P,  
Other finishes are available upon request.

# TL SERIES

## GRADE 3 RESIDENTIAL TUBULAR LEVERSET


### TL-H0S00

HW (Hawthorn)  
Entry  
US15




### TL-C0C00

CE (Cambridge)  
Entry  
US4




### TL-D0S00

DE (December)  
Entry  
US15




### TL-L0600

MH (Manhattan)  
Entry  
US5




### TL-M10S00

MR (Manchester)  
Entry  
US15




### TL-E0100

ET (Escort)  
Entry  
US3




### TL-T0S00

SD (San Diego)  
Entry  
US15



### TL-R0100

RZ (Ritz)  
Entry  
US3



- 6-Way latch available
- UL latch available upon request
- Reversible or non-handed design




### TL-S0S00

SY(Shelby)  
Entry  
US15



### TL-Q0S00

QN (Queen)  
Entry  
US15




### TL-V20S00

VC(Victoria)  
Entry  
US15




### TL-U3900

UR(Urania)  
Entry  
12P




### TL-J0S00

JU (Juran)  
Entry  
US15



### TL-V10S30

VT(Victor)  
Passage  
US15



### CERTIFICATION

#### ANSI

ANSI/BHMA A156.2-2011 Grade 3 certified.

#### UL

30 minutes fire rating certified. UL File No. R13776

### SPECIFICATIONS

#### Exposed Trim

Wrought brass or stainless steel. Zinc-die casting lever.

#### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.

2" available upon request

#### Strike

9102J. Full Lip Strike 1-3/4" X 2-1/4"

(44.4mm x 57.0mm) square corner standard.

Other strikes are available upon request.

#### Latch

2-3/8" and 2-3/4" adjustable(60mm and 70mm)

3-11/32", 5" 6-Way latch also available.

Faceplate: 1" x 2-1/4" (25.4mm x 57mm) square corner standard.

Latch bolt: Zinc alloy latch bolt with 1/2" throw. Nickel plated.

UL latch available upon request. (Stainless steel)

Push button available .

#### Cylinder

5 pin Kwikset Keyway (standard) .

Other keyways are available upon request.

#### Door Handing

Reversible lever and non-handed design suitable for both right and left hand door.

#### Finishes


US3, US5, US10B, US15, US26, US26D, 12P, 15A

Other finishes are available upon request.

### FUNCTION

EZ Code	ANSI Code	Description
00	F82B	Entry/Office
30	F76B	Privacy
77	-	Pair Dummy Trim
78	-	Single Dummy - 2 Screws
82	F75	Passage

### ORDERING INFORMATION

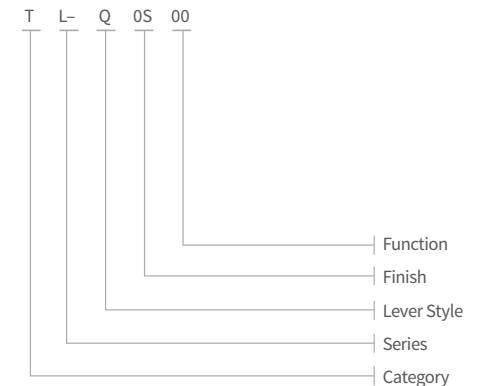

## RESIDENTIAL LEVERSET

### GK-Q0182

QN (Queen)  
Passage  
US3




### GK-E0082

EG (Eagle)  
Passage  
US32D



### GK-P0082

PE (Pittsburgh)  
Passage  
US32D

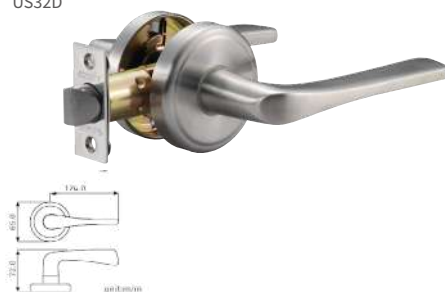

### GK-K0082

KN (Kingston)  
Passage  
US32D



### GK-S0082

SO (Scorpio)  
Passage  
US32D



## SPECIFICATIONS

### Exposed Trim

Stainless steel or Solid brass.

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.

2" (51mm) optional.

### Strike

9102J. Full Lip Strike 1-3/4" x 2-1/4" (44.4mm x 57.0mm)

square corner standard.

Other strikes are available upon request.

### Latch

2-3/8" and 2-3/4" adjustable. (60mm and 70mm)

Faceplate : 1" x 2-1/4" (25.4mm x 57mm) square corner standard. Round corner optional.

Bolt : 1/2" (12.7mm) throw. Solid brass, stainless steel or zinc alloy latch bolt also available.

### Door Handling

Non-handed or reversible.

### Finishes

US3, US5, US10B, US15, US15A, US26, US26D, US32, US32D (for stainless steel series only), 12P, LO3

Other finishes are available upon request.


## UL LATCH

30 minutes fire rating certified. UL File No. R13776.

## PACKAGE

Model	Pcs/Ctn	MEAS.
Box Pack	20	1.52 cu.ft.
G Series		
Clam Shell	10	0.98 cu.ft.

## ORDERING INFORMATION

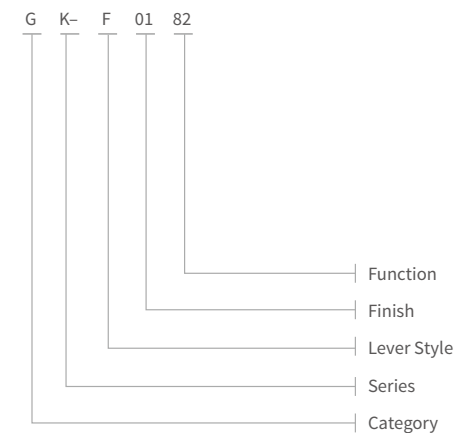


## FUNCTION

EZ Code	Description
30	Privacy
78	Single Dummy - 2 Screws
82	Passage



### TA-10600

DN(Devon)  
Entry  
US5

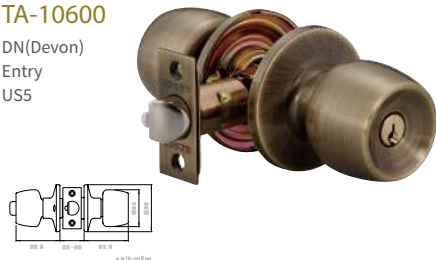

### TA-60000

SN(Sutton)  
Entry  
US32D



### TA-20100

OS(Olympus)  
Entry  
US3



### TA-70600

PE(Palace)  
Entry  
US5



### TA-30000

BA(Bala)  
Entry  
US32D




### TA-G0100

RY(Ruby)  
Entry  
US3



### TA-50000

GN(Guardian)  
Entry  
US32D

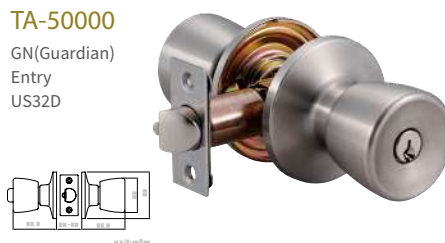

## SPECIFICATIONS

### Exposed Trim

Brass or stainless steel.

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.

2" available upon request

### Strike

9102J. Full Lip Strike 1-3/4" X 2-1/4"

(44.4mm x 57.0mm) square corner standard.

Other strikes are available upon request.

### Latch

2-3/8" and 2-3/4" adjustable.(60mm and 70mm)

5" (127mm) 6-Way latch also available.

Faceplate: 1" x 2-1/4" (25.4mm x 57mm) square corner standard. Round corner optional.

Latch bolt : Zinc alloy latch bolt with 1/2" throw. Nickel plated.

UL latch available upon request.

### Cylinder

5 pin Kwikset Keyway(standard) .

Other keyways are available upon request.

Push button available.

### Finishes

US3, US5, US10B, US15, US26D, US32, US32D, 12P, LO3

Other finishes are available upon request.

## CERTIFICATION

### ANSI

ANSI/BHMA A156.2-2011 Grade 3 certified.

### UL

30 minutes fire rating certified. UL File No. R13776


## FUNCTION

EZ Code	ANSI Code	Description
00	F82B	Entry
30	F76B	Privacy
62	F86	Storeroom
77	-	Pair Dummy Trim
78	-	Single Dummy - 2 Screws
82	F75	Passage

## PACKAGE

Model	Pcs/Ctn	MEAS.
TA Series	Box Pack	20 0.88 cu.ft.
	Clam Shell	10 0.80 cu.ft.


## ORDERING INFORMATION

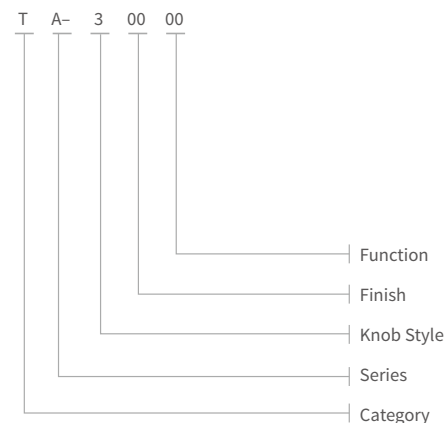

## GRADE 3 RESIDENTIAL CYLINDRICAL KNOBSET


### NA-10600

DN (Devon)  
Entry  
US5




### NC-20800

OS(Olympus)  
Entry  
US32




### NA-20000

OS(Olympus)  
Entry  
US32D




### NC-30100

BA(Bala)  
Entry  
US3




### NA-30000

BA(Bala)  
Entry  
US32D



### NA-60000

SN(Sutton)  
Entry  
US32D



## CERTIFICATION

### ANSI STANDARD

ANSI/BHMA A156.2-2003 Grade 3

### UL

30 minutes fire rating certified. UL File No. R13776.

## SPECIFICATIONS

### Exposed Trim

Brass or stainless steel.

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.

### Strike

9101. T strike 1-1/8" X 2-3/4"

(28.0mm x 69.8mm) square corner standard.

Other strikes are available upon request.

### Latch

Available in 2-3/8", 2-3/4", 3-1/3", 3-3/4" or 5" backset.  
(51mm, 60mm, 70mm, 85mm, 95mm or 127mm)

Faceplate : 1" x 2-1/4" (25.4mm x 57mm) square corner.

Latch Bolt : Zinc alloy latch bolt with 1/2" throw. Nickel plated.

### Cylinder

5 pin Kwikset Keyway (standard) .

Other keyways are available upon request.

High security cylinder (CM / CI keyway) also available.

### Rose Cover

2-1/2" (65 mm) diameter (standard) .

3" (75 mm) diameter (optional) .

### Finishes

US3, US5, US10B, US15, US26D, US32, US32D, 12P

Other finishes are available upon request.


## FUNCTION

EZ Code	ANSI Code	Description
00	F109	Entry/Office
11	-	Store Door
30	F76	Privacy
62	F86	Storeroom
75	-	Single Dummy Trim
82	F75	Passage
90	F77B	Patio

## PACKAGE

Model		Pcs/Ctn	MEAS.
NA Series	Box Pack	20	0.88 cu.ft.
	Clam Shell	10	0.67 cu.ft.
NC Series	Box Pack	20	1.05 cu.ft.
	Clam Shell	10	0.80 cu.ft.


## ORDERING INFORMATION

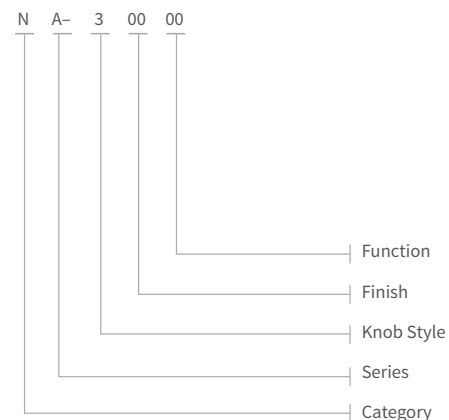

## GRADE 3 CYLINDRICAL LEVERSET


### NE-00S00

LG(Legacy)  
Entry  
US15




### NE-00S82

LG(Legacy)  
Passage  
US15




### NE-00S30

LG(Legacy)  
Privacy  
US15



### NE-30S00

BA(Bala) Knob  
LG(Legacy) Lever  
Entry  
US15



## CERTIFICATION

### ANSI STANDARD

Comply to ANSI 156.2-2003 Grade 3 standard.

## PACKAGE

Model	Pcs/Ctn	MEAS.
-------	---------	-------

NE Series    Box Pack    20    1.01 cu.ft.

## FUNCTIONS

EZ Code	ANSI Code	Description
00	F82B	Entry/Office
30	F76	Privacy
75	-	Single Dummy
82	F75	Passage

## SPECIFICATIONS

### Exposed Trim

Wrought brass or stainless steel. Pressure cast zinc lever.

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm )standard.

### Backset

Available in 2-3/8" , 2-3/4" , 3-3/4" or 5" backset. (60mm, 70mm, 95mm or 127mm)

### Strike

9101. T strike 1-1/8" X 2-3/4"

(28.0mm x 69.8mm )square corner standard.

Other strikes are available upon request.

### Latch

Available in 2-3/8" , 2-3/4" (60mm,70mm) or 2-3/8" to 2-3/4" (60mm to 70mm) adjustable.

Faceplate : 1" x 2-1/4" (25.4mm x 57mm) square corner.

Latch Bolt : Zinc alloy latch bolt with 1/2" throw. Nickel plated.

### Cylinder

5 pin Kwikset Keyway(standard).

Other keyways are available upon request.

### Door Handing


Non-handed levers.

### Finishes

US3, US10B, US15, US26, US26D

Other finishes are available upon request.

## ORDERING INFORMATION

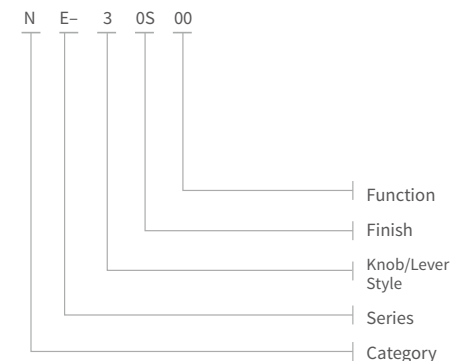




# MOBILE HOME LOCK SERIES

- Waterproof-washer for exterior use
- Auto release function ( TN / TP series )

## GRADE 3 MOBILE HOME LOCK

### TP50000

GN(Guardian)  
Entry  
US32D



### CERTIFICATION

#### ANSI STANDARD

Comply to ANSI A156.36-2010, A156.2-2011 Grade 3 standard

### SPECIFICATIONS

#### Exposed Trim

Brass or stainless steel.

#### Door Thickness

1-3/8" to 1-3/4"(35mm ~ 45mm)standard.

#### Backset

Available in 2-3/8" or 2-3/4" backset.(60mm or 70mm)

#### Latch

Drive in latch, 2-3/8"(60mm)standard, 2-3/4"(70mm) optional.

Tubular series: Zinc alloy latch bolt with Nickel plated.

Deadbolt series: Solid brass latch bolt with hardened steel rod insert, full 5/8" throw.

#### Cylinder

5 pin cylinders. Kwikset keyway standard.

Other keyways are available upon request.


#### Finishes

US3, US15, US26D.

Other finishes are available upon request.

### LT10010

Single Cylinder  
US32D




### FUNCTIONS

Tubular Series / EZ Code	Description
00	Entry
10	Single Cylinder


### ORDERING INFORMATION

#### Tubular Series

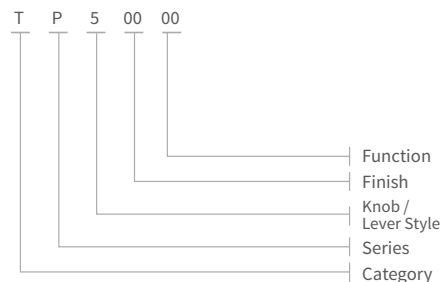

### ORDERING INFORMATION

#### Deadbolt Series

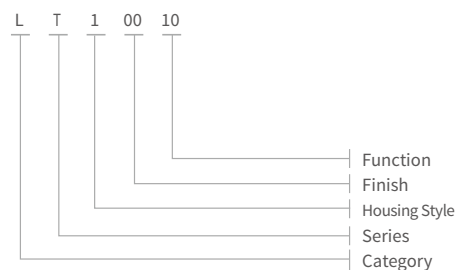


# L SERIES

## GRADE 3 RESIDENTIAL DEADBOLT LOCK


### LT-10110

Single Cylinder  
US3




### LT-10110-F

Single Cylinder  
US3




### LT-10013

One Side Deadbolt  
(Key type)  
US32D




### LT-10111

Double Cylinder  
US3




### LT-10S10

Single Cylinder  
US15



### LT-10050


One Side Deadbolt  
US32D






## LT-10070

One Side Deadbolt  
US32D



## LT-10077

One Side Deadbolt  
US32D



## CERTIFICATION

### ANSI

ANSI/BHMA A156.36-2010 Grade 3 certified.

UL

3 hours fire rating certified. UL File No. R15047

## FUNCTION

EZ Code	ANSI Code	Description
10	E0153	Single Cylinder
11	E0143	Double Cylinder
13	E0163	One Side Deadbolt (Key type)
50	E0193	One Side Deadbolt (Non key)
70	E01113	One Side Deadbolt (Non key)
77	E01113	One Side Deadbolt (Non key)

## ORDERING INFORMATION

L	T-	1	00	10	
					Function
					Finish
					Housing Style
					Series
					Category

## SPECIFICATIONS

### Door Thickness

1-3/8" to 1-3/4" (35mm ~ 45mm) standard.  
2" (51mm) optional.

### Strike

9111. Rectangular strike 1-1/8" x 2-3/4"  
(28.4mm x 69.8mm) square corner standard.  
Other strikes are available upon request.

### Latch

2-3/8", 2-3/4" and 5" adjustable. (60mm, 70mm and 127mm)

6-Way latch also available.

Faceplate : 1" x 2-1/4" (25.4mm x 57mm) square corner standard.

Latch Bolt : Steel latch bolt with hardened steel rod insert, Full 1" (25.4mm) throw.

### Cylinder

5 pin Kwikset keyway standard. 6 pin cylinder optional.

Solid brass or zinc alloy cylinder housing also available.

Other keyways are available upon request.

High security cylinder (CM / CX keyway) also available.

### Finishes

US3, US5, US10B, US15, US26D, US32, US32D, 12P, L03

Other finishes are available are upon request.

## CYLINDER DESCRIPTION

Model	Description	LB	LT	LO	LR
LB	Solid Brass Cylinder Housing & Plug	●			
LR	Zinc Alloy Cylinder Housing & Solid Brass Plug				●
LT	Zinc Alloy Cylinder Housing & Solid Brass Plug		●		
	Zinc Alloy Cylinder Housing & Zinc Plug			●	

## PACKAGE

Model		Pcs/Ctn	MEAS.
Deadbolt Series	Box Pack	20	0.46 cu.ft.
	Clam Shell	10	0.58 cu.ft.

## LEVER HANDLE



### JT-50S00

J5-Lever (Zinc Alloy)  
Entry / US15



### JTMA0S00

JA Lever / JM Escutcheon  
Entry / US15



### JT-50S30

J5-Lever (Zinc Alloy)  
Privacy / US15



### JTMA0S30

JA Lever / JM Escutcheon  
Privacy / US15



### JT-50S82

J5 Lever (Zinc Alloy)  
Passage / US15



### JTMA0S82

JA Lever / JM Escutcheon  
Passage / US15




## FUNCTION

EZ Code	Description
00	Entry/Office
30	Privacy(with indicator)
82	Passage

## PACKAGE

Model		Pcs/ Ctn	MEAS.
JTM/JTA Series	Box Pack	20	1.15 cu.ft.
JT Series	Box Pack	20	1.15 cu.ft.

## ORDERING INFORMATION

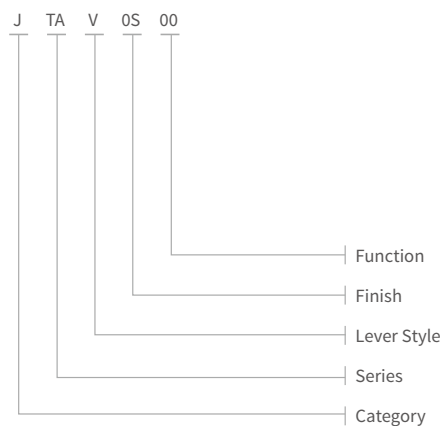

## SPECIFICATIONS

### Exposed Trim

JTM series : Solid brass escutcheon and lever.

JTA series : Brass or stainless steel escutcheon. Solid brass or zinc alloy lever.

JT series : Brass or stainless steel rose. Solid brass or zinc alloy lever.

### Door Thickness

1-4/25" to 1-3/4" (29mm - 45mm) standard.

### Backset

2-3/8" (60mm) only.

### Door Prep

JTA / JTM series

Please refer to installation instructions.

JT series

Cross Bore :  $\phi$ 1-9/16" (40mm)

Edge Bore :  $\phi$ 1" (25mm)

### Spindle

$\phi$ 7.2mm

### Strike

JT. Full Lip Strike 1-7/16" X 2-17/32"

(36.5mm x 64.0mm) square corner.

Other strikes are available upon request.

### Latch

2-3/8" (60mm) only.

Faceplate : 1" x 2-1/4" (25.4mm x 57mm) square corner.

Latch bolt : Solid brass or ABS(Anti-friction latch) latch bolt also available.

### Cylinder

JTM series : 5 pin solid brass cylinder. Yale keyway.

JTA series : 4 pin solid brass cylinder. Yale keyway.

### Finishes


US3, US4, US5, US10B, US15, US26.

Other finishes are available upon request.

## DEADBOLT LOCK


### LJ-10010

Single Cylinder  
US32D




### LJ-20S10

Single Cylinder  
US15




### LJ-10030

Privacy  
US32D



### LJ-20S30

Privacy  
US15



### Thumb Turn LJ#1

Sub Assembling Turn  
Zinc Die-Casting Type  
Exposed Screws



### Thumb Turn LJ#2

Sub Assembling Turn  
Zinc Die-Casting Type  
Exposed Screws



## SPECIFICATIONS

### Door Thickness

LJ#1 series : 1-4/25" to 1-3/4" (29mm ~ 45mm).

LJ#2 series : 1-9/32" to 2" (32mm ~ 51mm).

### Backset

LJ#1 series : 2-3/8" (60 mm) standard

2-3/4" (70 mm) spring latch optional

LJ#2 series : 2-3/8" (60 mm) standard

2-3/4" (70 mm) optional

### Door Prep

Cross Bore :  $\phi$ 1-1/2" (38mm)

Edge Bore :  $\phi$ 1" (25.4mm)

### Strike

LJ#2 series : Rectangular strike 1" x 2-1/4"

(25.4mm x 57.0mm) square corner.

Other strikes are available upon request.

### Latch

2-3/8" (60mm) deadbolt latch

1"x2-1/4" (25.4mm x 57mm) faceplate with square corner.

LJ#1 series : Brass latch bolt

LJ#2 series : Zinc alloy latch bolt with nickel plated

LJ#1 series : 2-3/4" (70mm) dead latch with solid brass latch bolt also available.

### Cylinder

LJ#1 series : 6 pin Schlage keyway

LJ#2 series : 5 pin Kwikset keyway

Other keyways are available upon request.

### Finishes

US3,US4,US5,US15,US26(for LJ#2 series),

US32D(for LJ#1 series),514(for LJ#2 series)

Other finishes are available upon request.

## FUNCTION

EZ Code	Description
10	Single Cylinder
30	Privacy(with indicator)

## PACKAGE

Model	Pcs/Ctn	MEAS.
LJ #1 Series	Box Pack	20
LJ #2 Series	Box Pack	20

## ORDERING INFORMATION

L	J-	1	OS	10	
					Function
					Finish
					Housing Style
					Series
					Category

LEVER HANDLE

JB-10S00

ZE(Zen)  
Entry  
US15



JB-20S00

AC(Achilles)  
Entry  
US15



950S00-D

Entry  
US15



954930-D

Privacy  
514



JB-10S30

ZE(Zen)  
Privacy  
US15



960S00

Entry  
US15



990S00-D

Entry  
US15



994930-D

Privacy  
514



JB-10S82

ZE(Zen)  
Passage  
US15



970S00

Entry  
US15



9R0600-D

Entry  
US15



9R3930-D

Privacy  
US12P



JBG0S82

GF(Golf)  
Passage  
US15



980S00

Entry  
US15




## FUNCTION

EZ Code	Description
00	Entry/Office
30	Privacy
82	Passage

## PACKAGE

Model	Pcs/Ctn	MEAS.
JB Series	Box Pack	20
		1.61 cu.ft.

## ORDERING INFORMATION

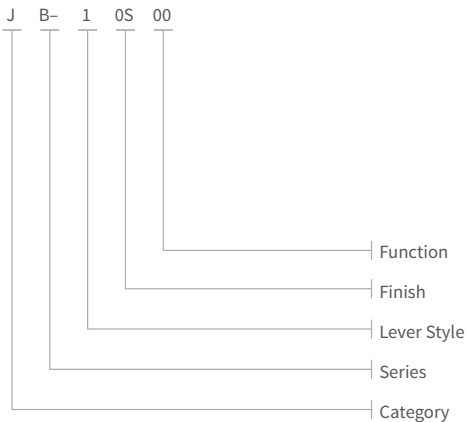

## SPECIFICATIONS

### Exposed Trim

Zinc alloy.

### Door Thickness

1-9/32" to 2" (32mm ~ 51mm) standard.

### Backset

2-3/8" (60mm) standard

2-3/4" (70mm) optional

### Door Prep.

Cross Bore:  $\phi$ 1-29/32" (48mm)

Edge Bore:  $\phi$ 1" (25.4 mm)

### Spindle

Entry, Privacy Function :  $\phi$  7.6mm

### Strike

9101. T strike 1-1/8" X 2-3/4"

(28.0mm x 69.8mm) square corner standard.

Other strikes are available upon request.

### Latch

2-3/8" (60mm) standard, 2-3/4" (70mm) optional.

Faceplate: 1" x 2-1/4" (25.4mm x 57mm) square corner.

Bolt: Zinc alloy latch bolt. Nickel plated.

### Cylinder

Wafer cylinder in 7 blades.

### Door Handing

Non-handed.

### Finishes

US5, US15, 514, 12P











Other finishes are available upon request.

## STRIKE







### For Cylindrical & Tubular Locks

Model	Dimensions	Function
	 28.0×69.8×1.2 mm	<b>9101</b> T Strike
	 44.4×57.0×1.2 mm	<b>9102J</b> Full Lip Strike (Square corner)
	 44.4×57.0×1.2 mm	<b>9103J</b> Full Lip Strike (Round corner)



### For Residential Deadbolt Locks

Model	Dimensions	Function
	 28.4×69.8 mm	<b>9111</b> Rectangular Strike (Square corner)
	 25.4×57.0 mm	<b>9112</b> Rectangular Strike (Square corner)
	 25.4×57.0 mm	<b>9113</b> Rectangular Strike (Round corner)
	 27.0×63.5 mm	<b>9115</b> Adjustable Strike (For mobile home)
	 44.4×57.0 mm	<b>9117</b> Full Lip Strike (Round corner)

### For Euro Mortise Locks

Model	Dimensions	Function
	 205×25.4×2.0 mm	<b>MF-F</b> MF Strike
	 205×25.4×2.5 mm	<b>MF-M</b> T Strike
	 205×32×2.6 mm	<b>MF-S</b> Rectangular Strike

### HIGH SECURITY CYLINDER DESCRIPTION

Model	Description
	CX Keyway
	CM/CI Keyway












## LATCH


### For G3 Tubular Knob Locks

Model	Description
	TAL-60/70mm -Adjustable -Entry
	TAL-60/70mm -Adjustable -Privacy/Passage
	TA-60mm -Entry
	TA-60mm -Privacy/Passage
	TF 6 Way Latch (Knob) -Entry
	TA- 60mm -Entry -Single Camshaft

Model	Description
	TA- 60mm -Privacy/Passage -Single Camshaft
	TA-70mm -Entry -Single Camshaft
	TA- 70mm -Privacy/Passage -Single Camshaft
	6 Way Latch -Entry
	6 Way Latch -Privacy/Passage
	Mobile Latch -60mm -Entry

Model	Description
	Mobile Latch-60mm -Privacy/Passage
	Mobile Latch -70mm -Entry
	Mobile Latch -70mm -Privacy/Passage
	TH-85mm -Entry
	TH-85mm - Privacy/Passage
	TA-127mm -Entry


Model	Description
	TA-127mm - Privacy/Passage
For G3 Tubular Lever Locks	
Model	Description
	THAL-60/70mm -Adjustable -Entry
	THAL-60/70mm -Adjustable -Privacy/Passage
	TH-60mm -Entry
	TH-60mm -Privacy/Passage
	TL 6 Way Latch (Lever) -Entry

Model	Description
	TL 6 Way Latch (Lever) -Privacy/Passage

	6 Way Latch (Knob) -Entry
---	------------------------------


	6 Way Latch (Knob) -Privacy/Passage
---	--


#### For G2 Tubular Knob Locks

Model	Description
	TT 6 Way Latch (Knob) -Entry


	TT 6 Way Latch (Knob) -Privacy/Passage
---	---

#### For G2 Tubular Lever Locks

Model	Description
	TT 6 Way Latch (Lever) -Entry


	TT 6 Way Latch (Lever) -Privacy/Passage
---	--

#### For G3 Cylindrical Locks

Model	Description
	NA-60mm -Entry

	NA-60mm -Privacy (with hook)/ Passage
---	---

	NA-70mm -Entry
---	-------------------

Model	Description
	NA-70mm -Privacy (with hook)/ Passage

	NAL -Entry
---	---------------

	NAL -Privacy (with hook)/ Passage
---	---

	NA-85mm -Entry
---	-------------------

	NA-85mm -Privacy (with hook)/ Passage
---	---

Model	Description
	NA-127mm -Entry

	NA-127mm -Privacy (with hook)/ Passage
---	--

	NA-DI -Entry
---	-----------------

	NA-DI -Privacy (with hook)/ Passage
---	---

	NA-90mm -Entry (with hook)
---	-------------------------------

### For G3 Deadbolt Locks

Model	Description
	LTAL-Steel
	LTAL-6 Way Latch
	6 Way Latch
	LB-60mm
	LB-127mm

### For G2 Deadbolt Locks

Model	Description
	LTAL-Brass
	LTAL-6 Way Latch
	MS-60 mm-S.S.
	MF-60mm-Brass
	MF-70mm-Brass






### For Motise Locks

### FINISH





Finish	US Code	EZSET Code	Description
	US3	01	Polished Brass
	US5	06	Antique Brass
	US10B	09	Dark Oxidized Bronze, Oil Rubbed
	US15	0S	Satin Nickel Plated
	US26	0R	Polished Chromium
	US26D	03	Satin Chromium Plated
	US32	08	Polished Stainless Steel
	US32D	00	Satin Stainless Steel
	12P	39	Satin Oxidized Bronze
	LO3	0Y	PVD Brass

Other finishes are available.




## FUNCTION DESCRIPTION / Cylindrical & Tubular Locks

Function	EZSET Code	ANSI Code	Description
	00	F109	<b>ENTRY/OFFICE</b> Latch bolt by either knob/lever unless outside knob/lever is locked by push/turn button in inside knob/lever. Key retracts latch bolt when outside knob/lever is locked.
		F82B	<b>ENTRY</b> Both knobs/ levers locked or unlocked by key outside or turn button inside.
	11	-	<b>STORE DOOR LOCK</b> Dead locking latch bolt operated by knob from either side except when both knob are locked by turning key from either side. Latch bolt is automatically dead locked when door is closed.
	30	F76B	<b>PRIVACY LOCK</b> Latch bolt by either knob/lever. Outside knob/lever is locked by push/turn button or locking device inside and unlocked by emergency release outside or operating inside knob/lever.
	62	F86	<b>STOREROOM LOCK</b> Dead locking latch bolt operated by key in outside knob, or by operating inside knob. Outside knob is always inoperable.
	75	-	<b>SINGLE DUMMY TRIM</b> Single dummy trim attached by single screw or mounting wood screw. For door where a pull only is required.


## FUNCTION DESCRIPTION / Cylindrical & Tubular Locks

Function	EZSET Code	ANSI Code	Description
	77	-	<b>PAIR DUMMY TRIM</b> Double dummy trim for both side of door.
	78	-	<b>SINGLE DUMMY TRIM</b> Dummy trim for one side of door. Used for door pull or as matching inactive trim. Knob and rose attached by two wood screws.
	82	F75	<b>PASSAGE SET</b> Latch bolt operated by knob/lever, from either side at all time.
	90	F77B	<b>PATIO LOCK</b> Dead locking latch bolt operated by knob from either side. Outside knob is locked by push button or other locking device inside and unlocked








## FUNCTION DESCRIPTION / Entrance Handleset

Function	EZSET Code	ANSI Code	Description
	10	-	<b>SECTIONAL HANDLESET WITH SINGLE CYLINDER DEADBOLT</b> Latch bolt operated by thumb piece outside and grip inside. Deadbolt operated by key outside and thumb turn inside.
	11	-	<b>SECTIONAL HANDLESET WITH DOUBLE CYLINDER DEADBOLT</b> Latch bolt operated by thumb piece outside and grip inside. Deadbolt operated by key both sides.
	75	-	<b>SECTIONAL DUMMY HANDLESET WITH DUMMY DEADBOLT</b> Handle and grip act as a pull only. For inactive leaf of double doors. No operation.



## FUNCTION DESCRIPTION / Deadbolt Lock

Function	EZSET Code	ANSI Code	Description
	10	E0152 E0153	<b>SINGLE CYLINDER DEADBOLT LOCK</b> Deadbolt thrown or retracted by key from outside or by inside thumb turn.
	11	E0142 E0143	<b>DOUBLE CYLINDER DEADBOLT LOCK</b> Deadbolt thrown or retracted by key from either side.
	12	E0172	<b>CLASSROOM DEADBOLT LOCK</b> Deadbolt thrown or retracted by key from outside. Inside thumb turn will retract bolt only.
	13	E0163	<b>ONE-WAY DEADBOLT LOCK(KEY TYPE)</b> Deadbolt thrown or retracted by key outside. Blank plate with exposed screws inside.
	50	E0192 E0193	<b>ONE SIDE DEADBOLT LOCK</b> Deadbolt thrown or retracted by thumb turn inside. No outside trim.
	70	E01112 E01113	<b>ONE-WAY DEADBOLT LOCK(NON-KEY TYPE)</b> Deadbolt operated by thumb turn from inside. Blank plate on other side.
	77	-	<b>ONE-WAY DEADBOLT LOCK(NON-KEY TYPE)</b> Deadbolt operated by thumb turn from inside. Blank cylinder housing on other side.

## FUNCTION DESCRIPTION / Euro Mortise Lock

Function	EZSET Code	ANSI Code	Description
	10	-	<b>SINGLE CYLINDER WITH THUMB TURN / ENTRANCE LOCK</b> Latch bolt operated by lever from either side at all time. Deadbolt thrown or retracted by key from outside or by inside thumb turn.
	11		<b>DOUBLE CYLINDER</b> Latch bolt operated by lever from either side at all time. Deadbolt thrown or retracted by key from either side.
	30		<b>SINGLE CYLINDER WITH THUMB TURN / PRIVACY LOCK</b> Latch bolt operated by lever from either side at all time. Deadbolt thrown or retracted by inside thumb turn or unlocked by emergency release outside.
	66		<b>SINGLE CYLINDER WITH THUMB TURN / STOREROOM LOCK</b> Outside lever always free-wheeling. Latch bolt retracted by key from outside or by inside lever. Deadbolt thrown or retracted by key from outside or by inside thumb turn.
	78		<b>SINGLE DUMMY TRIM</b> Single dummy trim for one side of door. Used for door pull or as matching inactive trim. Escutcheon attached by two wood screws.
	77		<b>PAIR DUMMY TRIM</b> Double dummy trim for both side of door.
	82		<b>PASSAGE SET</b> Latch bolt operated by lever from either side at all time.

Keying System

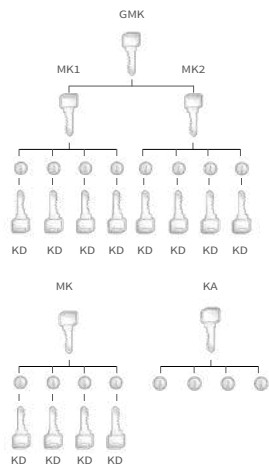

Keying

Code	Description
KA	Keyed Alike
KD	Keyed Different
MK	Master Keyed
GMK	Grand Master Keyed
CK	Construction Keyed
MCK	Master Construction Keyed

Key Blank & Keyway Description


Key Blank

Keyway


Key Blank

Keyway

TE5




TN5




Kwikset  
Keyway

TT5




TL5




Weiser  
Keyway

YA5




Yale  
Keyway

SC5




Schlage  
Keyway

CF5




C4  
Keyway

TP5



CI  
Keyway

TH5



CX  
Keyway

NOTE