

Mica

Downlight


Description

The Mica Downlight is a premium directional downlight at the forefront of design with an elegant slim bezel and high CRI, ideal for Residential, Hospitality, Retail and Marine applications. It is shallow in order to fit most ceiling voids with ease, without compromising lumen output - using premium efficacy LED's with industry leading heat distribution and TIR optics, to achieve your desired beam angle.

When creating the Mica Downlight we considered usability, ease of installation and adaptability to ensure complete versatility for the best results so that different filters, optics, recessing springs and LEDs can be used to enhance performance and fulfil your vision.



MiDL - 27 - 12 - 20 - 97 - CC - WH - BL

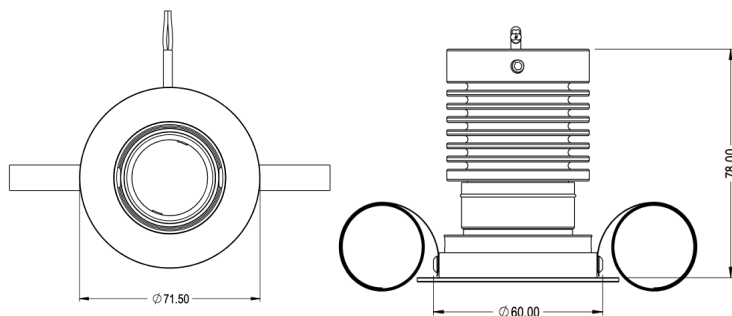

CUT-OUT - 60mmØ

RAL* a variety of Powder coated, Electro Plated and Anodised finishes are available Please contact your Omni-Via sales representative for further details.

Key

Due to the incredible amount of versatility that the Mica allows, please use the key below as a guide for the performance.

If Drive Current	CCT	Lumens	Wattage
260mA	2700	759	8.6
	3000	798	
	4000	824	
350mA	2700	1063	11.8
	3000	1114	
	4000	1148	

Build your code

Build your code using the table below using the 'Code Tag'. An example is located under the product photo.

Description	Code Tag	Meaning
Type	MiDL	Downlight
CCT	27 30 40 DW	2700K 3000K 4000K Dim to Warm
Beam Angle	12 20 30 40	12° 20° 30° 40°
IP Rating	20	20
CRI	97	97
Spring	CC	Constant Curly
Colour Bezel	WH BL SC PC RAL*	White (RAL 9010) Black (RAL 9005) Satin Chrome Polished Chrome Ral/Variant
Colour Baffle	WH BL RAL*	White (RAL 9010) Black (RAL 9005) RAL/Variant

For Dim to Warm please see below:

Range CCT	Wattage	Vf	CRI	Lumens
1800-3000	13.5	35	90	1000