### **VERIFICATION OF CONFORMITY**

No. IN-GZ-CP-5627-21032

It has been stated that the construction product

#### Econic clay coverings 3D-TECH series

Description of the product(s):

Intended use: For wall covering under system 4

placed on the market by

#### PHOMI MCM CO., LTD

15/F, BUILDING A2, MODERN AVENUE, SCIENCE CITY, HUANGPU DISTRICT, GUANGZHOU

and produced in the manufacturing plant

#### PHOMI MCM CO., LTD

15/F, BUILDING A2, MODERN AVENUE, SCIENCE CITY, HUANGPU DISTRICT, GUANGZHOU

is submitted by the manufacturer to the further testing of samples taken at the factory in accordance with a prescribed test plan and that the third party- SGS-CSTC Standards Technical Services Co., Ltd. has performed the determination of the product type as required for Regulation 305/2011/EU and the assessment and verification of conformity at system 4.

This verification attests that type testing or type calculation described in Annex ZA of the standard EN 15102:2007+A1:2011 was applied and that the relevant test report no. is CANMLC2120687003, CANMLC2120687004

This verification is customer voluntary act and refers to the tested samples only-type representative of the tested product. The relevant quality management system certificate no. is 15720Q20477R0S, the manufacturer is obligated to apply factory production control.

This verification is valid from Jan. 19, 2022 until Jan. 18, 2025 and remains valid as long as the manufacturing conditions in the plant or the factory production control itself are not modified significantly.

CE

The general principles set out in Article 30 of Regulation (EC) No 765/2008 shall apply to the CE marking. The CE marking shall be affixed to those construction products for which the manufacturer has drawn up a declaration of performance.

Issue 1. Verified since Jan. 19, 2022 Authorised by



Guangzhou Branch Manager

SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch No.198, Kezhu Road, Scientech Park, Economic and Development District, Guangzhou, China 510663 t +86 (0)20 8215 5555 f ◆86 (0)20 8207 5080

email Industrial.China@sgs.com website www.sgs.com



Page 1 of 1 CE-CPR-01

Disclaimer: This document is assued by the Company subject to its General Conditions of Certification Services accessible at <a href="https://www.sgs.com/ferms">www.sgs.com/ferms</a> and conditions htm. Neither SGS-CSTC, any of affiliated organizations or the SGS Group can be held responsible for conformity or non-conformity of the actual product with the centents of the technical file. Any unauthorized alteration, forecry, or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest.



#### **Product Carbon Footprint Verification Statement**

# is awarded to PHOMI HOLDING CO., LTD.

Verified product: Econiclay Covering

Functional/Declared unit: 1 m2 Econiclay Covering and 1 kg Econiclay Covering (Size:

1200mm×600mm×3mm; Weight: 3.9kg/ m<sup>2</sup>; Packaging material weight: 118.8 g/m<sup>2</sup>)

**System boundary:** The life cycle (from cradle to grave) process GHG emission of 1 m<sup>2</sup> / 1kg Econiclay Covering produced in PHOMI MCM CO., LTD., including upstream raw material acquisition and production, raw material transportation, core production and downstream product transportation, product utilization and disposal process.

Reporting period verified: 1/1/2023 to 31/12/2023

Production Company: PHOMI MCM CO., LTD.

Production address: No.9 Zhijiang Road, Overseas Chinese Investment Zone, Laibin City,

Guangxi Zhuang Autonomous Region, China

**Re-verification conditions:** Re-verification shall be applied when Greenhouse Gas emissions in life cycle of the product has 5% or more than 5% planned changes or has more than 10% unplanned changes, and these changes continue for more than 3 months.

#### Bureau Veritas Certification (Beijing) Co., Ltd.

certifies that above organization has conducted Greenhouse Gas verification of product carbon footprint in accordance with the requirements of the standard detailed below, and verification data are reasonable measurement and calculation.

#### ISO 14067: 2018

Greenhouse Gas emission in life cycle of 1 m<sup>2</sup> Econiclay Covering product (from cradle to grave): 1.02 kgCO₂e

Greenhouse Gas emission in life cycle of 1 kg Econiclay Covering product (from cradle to grave): 0.26 kgCO₂e

Statment No.: EMI21094621GZ-01

Version No.: NO.1

Lead verifier: Haoyu HUANG

Verification date: 23-24, January, 2024

Issue date: 13/3/2024

Expiry date: 12/3/2026

igned on behalf of

Signed on behalf of Bureau Veritas Certification (Beijing) Co., Ltd.

Certification body address: Room 02, 9 / F, West Office Building 1, Oriental Economic and Trade City, Oriental Plaza, No.1

East Chang'an Street, Dongcheng District, Beijing, China. 100738

Further clarifications regarding the verification scope of this statement may be obtained by consulting the organization.

To check this statement validity please call: +86 10 59683888 or +86 20 83073800

Page 1 of 1

# **CERTIFICATE**OF COMPLIANCE



## Phomi MCM Co Ltd

See product list below

UL 2818 - 2013 Gold Standard for Chemical Emissions for Building Materials, Finishes and Furnishings

Product tested in accordance with UL 2821 test method to show compliance to emission limits on UL 2818. Sectopm 7.1 and 7.2.

Commercial furniture and furnishings are tested in accordance with ANSI/BIFMA M7.1-2011 and determined to comply with ANSI/BIFMA X7.1-2011 and ANSI/BIFMA e3-2014e Credit 7.6.1, 7.6.2, and 7.6.3. Panel based workstations are modeled in the open plan environment. Casegood systems and individual furniture items are modeled in the private office environment. Seating products are modeled in the seating environment. Classroom furniture is modeled using the standard classroom model in the California Department of Public Health (CDPH) Standard Method v1.2.

Building Products are determined compliant in accordance with California Department of Public Health (CDPH) Standard Method V1.1-2010, using the applicable exporsure scenario.



# **CERTIFICATE**OF COMPLIANCE

## **UL GREENGUARD Certified Products Listing**

Product Name	Certification	Status	Certificate Number	Certification Period	Restrictions
2.5 mm Modified inorganic powder composite building decorative material——MCM Facing Brick Serie	GREENGUARD Gold Certified	Certified	155948-420	09/12/2019- 09/12/2020	
2.5mm Modified inorganic powder composite building decorative material——MCM Leather Serie	GREENGUARD Gold Certified	Certified	155949-420	09/12/2019- 09/12/2020	
2.5mm Modified inorganic powder composite building decorative material—Wood Serie	GREENGUARD Gold Certified	Certified	155950-420	09/12/2019- 09/12/2020	
2.5-10.0mm Modified inorganic powder composite building decorative material—Stone Serie	GREENGUARD Gold Certified	Certified	155951-420	09/12/2019- 09/12/2020	
2.5-5.0mm Modified inorganic powder composite building decorative material—Weaving Serie	GREENGUARD Gold Certified	Certified	155952-420	09/12/2019- 09/12/2020	

Please refer to current certificates on ul.com/spg for complete compliance information.



## 美国专利证书



## (12) United States Patent

#### METHOD FOR MODIFYING NOMAL CLAY (54)AND A METHOD FOR PRODUCING COMPOSITE/ELASTOMER FROM THE CLAY

- Lei Shi, Guangdong (CN)
- Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 947 days.
- (21) Appl. No.: 12/451,321
- (22) PCT Filed: Aug. 20, 2007
- (86) PCT No.: PCT/CN2007/002514

§ 371 (c)(1),

(2), (4) Date: Nov. 6, 2009

(87) PCT Pub. No.: WO2008/134917 PCT Pub. Date: Nov. 13, 2008

**Prior Publication Data** (65)US 2010/0098495 A1 Apr. 22, 2010

(51)Int. Cl. B02C 1/00 (2006.01)B02C 19/00 (2006.01)

(2006.01)B02C 21/00 U.S. Cl. USPC ...... 241/21; 241/22; 241/23

(58)Field of Classification Search See application file for complete search history.

(10) Patent No.: (45) Date of Patent:

#### References Cited U.S. PATENT DOCUMENTS

4/1994 Bateson et al. ...... 241/20 6,601,787 B1\* 8/2003 Langenecker ...... 241/21

US 8,505,840 B2

Aug. 13, 2013

\* cited by examiner


(56)

Primary Examiner — Faye Francis © (74) Attorney, Agent, or Firm Raymond Y. Chan; David and Raymond Patent Firm

#### (57)ABSTRACT

A method for modifying soil and a method for producing composite Elastomer of the soil are disclosed. The method for modifying soil includes drying, pulverizing, sieving, and purifying the soil to obtain soil powder, then dynamically heating the powder and adding surfactant, which includes coupling agent, polysiloxane having reactive functional, emulsifier of organosilicon and aliphatic amine, and water, and then drying the above obtained powder to obtain modified soil. The modified soil and acrylic acid copolymer emulsion are mixed with plasticizer, foaming agent, etc. to form a composite body which is used to produce elastomer floor board, elastomer wall brick, composite soil skin material, and so on. No emission of toxic gas and evaporation of organic solvent can be attained during production and use of the invention, and performance of the product is same as or has superiority over rubber in compression deformation rate, rebound elasticity and durability.

#### 11 Claims, 2 Drawing Sheets

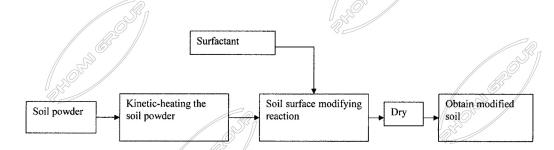













No.SDHL2212100086HI

Date: Mar 20, 2023

Page 1 of 7

GUANGXI PHOMI MCM CO.,LTD NO.9, ZHIJIANG ROAD, OVERSEAS CHINESE INVESTMENT ZONE, LAIBIN CITY,GUANGXI,CHINA

Sample Description

: ECONIC CLAY COVERINGS 3D-TECH SERIES

Manufacturer

: GUANGXI PHOMI MCM CO.,LTD

Country of Origin

: CHINA

As above test item and its relevant information regarding to the submission are provided and confirmed by the applicant. SGS is not liable to either the test item or its relevant information, in terms of the accuracy, suitability, reliability or/and integrity accordingly.

Sample Receiving Date

: Dec 01, 2022

**Test Performing Date** 

: Dec 05, 2022 to Feb 27, 2023

Test Performed

: Selected test(s) as requested by applicant

Test Result(s)

: For further details, please refer to the following page(s)

Signed for and on behalf of

SGS-CSTC Standards Technical Services Co., Ltd. Shunde Branch

Peter Zhao

**Authorized Signatory** 





Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2 1 6 5 4 5



No.SDHL2212100086HI

Date: Mar 20, 2023

Page 2 of 7

#### **Test Result Summary**

Test(s) Requested	Result(s)	Comments	
Light Ageing Test-UV Exposure ASTM G154-16 Cycle1 & ISO 105-A02:1993/Cor.2:2005 & ASTM D2244-21	See results	1	
Resistance to Freeze-Thaw Cycling	Number of damaged specimens: 0		
ASTM C1026-13(2016) & Client's Requirement	Total weight loss: 0.34%	eles .	
Absorption and Bulk Specific Gravity	Absorption: 8.02%		
ASTM C97/C97M-18	Bulk Specific Gravity: 1.892	650	
Scrub Resistance With reference to ASTM D2486-17 Method A and client's requirement	No substrate exposed after 4000 cycles	1	
	Light Ageing Test-UV Exposure ASTM G154-16 Cycle1 & ISO 105-A02:1993/Cor.2:2005 & ASTM D2244-21  Resistance to Freeze-Thaw Cycling ASTM C1026-13(2018) & Client's Requirement  Absorption and Bulk Specific Gravity ASTM C97/C97M-18  Scrub Resistance	Light Ageing Test-UV Exposure ASTM G154-16 Cycle1 & ISO 105-A02:1993/Cor.2:2005 & ASTM D2244-21  Resistance to Freeze-Thaw Cycling ASTM C1026-13(2018) & Client's Requirement  Absorption and Bulk Specific Gravity ASTM C97/C97M-18  See results  Number of damaged specimens: 0  Total weight loss: 0.34%  Absorption: 8.02% Bulk Specific Gravity: 1.892  Scrub Resistance With reference to ASTM D2486-17 Method A and client's requirement	



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2 16 5 4 6



No.SDHL2212100086HI

Date: Mar 20, 2023

Page 3 of 7

PART 1:

Test Item: Light Ageing Test-UV Exposure

Sample Description: See photos

Test Method: ASTM G154-16 Cycle1 & ISO 105-A02:1993/Cor.2:2005 & ASTM D2244-21

Test Condition:

Exposure cycle:

Lamp type: UVA-340

8h UV at (60±3)°C BPT, 0.89W/(m2•nm)@340nm

4h condensation at (50±3) ℃ BPT

Exposure duration: 2000h

#### Test Result:

Sample	Exposure duration	Grey scale	∆ E*ab
^	1500h	4-5	1.8
А	2000h	4-5	2.2

#### Note:

- 1. According to ISO 105-A02:1993/Cor.2:2005, the grey scale was determined under the D65 standard light, with scale 5 as the best and scale 1 as the worst.
- 2. The results were carried out within 1 hour after above specified durations for the intermediate inspection as well as at the end of the exposure.
- 3.  $\triangle$  E\*ab was measured by sphere spectrophotometer under D65 standard light source and with 10° observer. The results include specular component reflection condition, 25 mm aperture.



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdition issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2 1 6 5 4 7

「作」「Building European Industrial Park,No.1 Sturme South Read, Westa Section Dating Town, Sturnde Fostian, Guangdong, China 528333 t (86-757)22805888 f (86-757)2805888 f (86-757)280588 f (86-757)28058 f (86-757)28058 f (86-757)28058 f (86-757)28058 f (




No.SDHL2212100086HI

Date: Mar 20, 2023

Page 4 of 7

Test Photo:

Check the authenticity of testing /inspection report & certificate, please contact us at telephone; (86-755)83071443, or email: CN. Doccheck@sgs.com

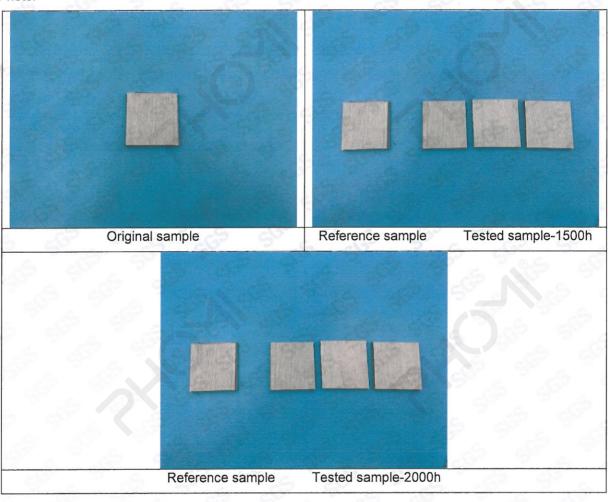



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdition issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2 16 5 4 8

1所。「中国がInfogEuropean Industrial Park,No.1 Shurnhe South Read, Nixsha Section, Dalaing Torm, Shurnhe Fostan, Guanquiong, China 528333 t (86—757)22805888 f (86—757)22805858 www.sgsgroup.com.cn 中国・广东・仲山市原徳区大良街道办事处五沙顺和南路1号欧洲工业园一号厂房首层 邮编: 528333 t (86—757)22805888 f (86—757)22805858 e sgs.china@sgs.com



No.SDHL2212100086HI


Date: Mar 20, 2023

Page 5 of 7

Part 2 (SGS Ref. No.: GZIN2212007283CM)

Original Sample Photo:

Attention: To check the authenticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: CN.Doccheck@sgs.com

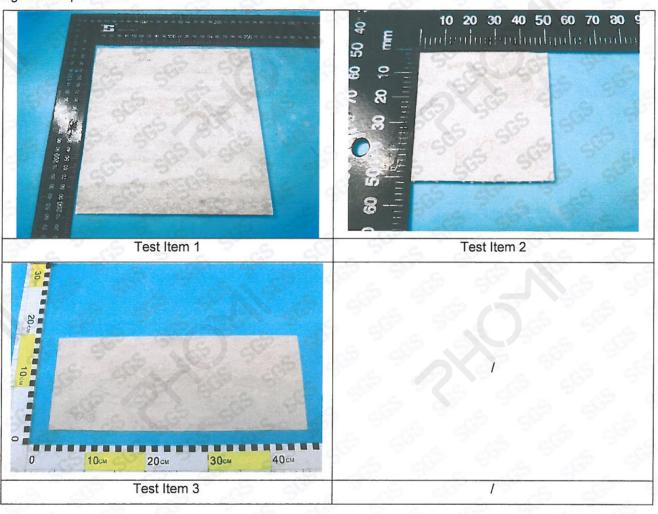



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2 16 5 4 9

16;1<sup>4</sup> Building European Industrial Park,No.1 Shunhe South Road, Nivatha Section, Daliang Torm, Shunde, Fosten, Geongdong, China 528333 t (86-757)22805888 f (86-757)22805858 www.sgsgroup.com.cn 中国·广东·佛山市顺德区大良街道办事处五沙顺和南路1号欧洲工业园一号厂房首层 邮编: 528333 t (86-757)22805888 f (86-757)22805858 e sgs.china@sgs.com



No.SDHL2212100086HI

Date: Mar 20, 2023

Page 6 of 7

Test Item 1: Resistance to Freeze-Thaw Cycling

Sample Description: See photo

Test Method: ASTM C1026-13(2018) & Client's Requirement

Test Condition:

Specimens: 200mm×200mm×1.96mm

Condition: ①Dry in an oven at 150°C for 24h→②Cool down in a desiccator→③put in boiling

deionized water for 5 h, soak for 24h, then remove from water→④-3℃,1h→⑤5℃,1h

④-⑤as a cycle, 20 cycles in total→⑥Dry in an oven at 150℃ for 24h.

#### Test Result:

Test Item	Test Result
Number of damaged specimens	0
Total weight loss	0.34%

Test Item 2: Absorption and Bulk Specific Gravity

Sample Description: See photo

Test Method: ASTM C97/C97M-18

Test Condition:

Specimens: 50mm×50mm×1.96mm

Condition: Dry in an oven at 60°C for 48h → Cool them to room temperature in a desiccator →

Immerse in distilled water at 22°C for 48h

#### Test Result:

Test Item	Test Result
Absorption	8.02%
Bulk Specific Gravity	1.892



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdition issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2 16 5 5 0



No.SDHL2212100086HI

Date: Mar 20, 2023

Page 7 of 7

Test Item 3: Scrub Resistance Sample Description: Sheet

Test Method: With reference to ASTM D2486-17 Method A and client's requirement

**Test Condition:** 

Brush: Nylon Bristle Brush

Abrasive Scrub Medium: Leneta standardized scrub medium SC-2

Load: (454±10) g

Speed: (37±1) cycles/min

Test Result:

Test Item	Result
Scrub Resistance	No substrate exposed after 4000 cycles

#### Test Photo:



Remark: Part 2 test was subcontracted to SGS-CSTC Standards Technical Services Co., Ltd. Guangzhou Branch.

\*\*\*End of Report\*\*\*



Unless otherwise agreed in writing, this document is issued by the Company subject to its General Conditions of Service printed overleaf, available on request or accessible at <a href="http://www.sgs.com/en/Terms-and-Conditions.aspx">http://www.sgs.com/en/Terms-and-Conditions.aspx</a> and, for electronic format documents, subject to Terms and Conditions for Electronic Documents at <a href="http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx">http://www.sgs.com/en/Terms-and-Conditions/Terms-e-Document.aspx</a>. Attention is drawn to the limitation of liability, indemnification and jurisdiction issues defined therein. Any holder of this document is advised that information contained hereon reflects the Company's findings at the time of its intervention only and within the limits of Client's instructions, if any. The Company's sole responsibility is to its Client and this document does not exonerate parties to a transaction from exercising all their rights and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any unauthorized alteration, forgery or falsification of the content or appearance of this document is unlawful and offenders may be prosecuted to the fullest extent of the law. Unless otherwise stated the results shown in this test report refer only to the sample(s) tested and such sample(s) are retained for 30 days only.

2 16 5 5 1

IF,I<sup>®</sup> Buiding European Industrial Park,Ikh.1Shurhe South Read, Wuste Seaton, Dalang Town, Shurnde, Fasten, Guangdung, China 528333 t (86-757)22805888 f (86-757)22805858 www.sgsgroup.com.cn 中国・广东・影山市原復区大良街道办事处五沙順和南路1号欧洲工业园一号厂房首层 邮貨: 528333 t (86-757)22805888 f (86-757)22805858 e sgs.china@sgs.com



# PHOMI MCM CO., LTD.

# TEST REPORT

#### **SCOPE OF WORK**

Phomi Flexi Econic Clay

#### **REPORT NUMBER**

220228007SHF-001

#### TEST DATE(S)

2022-02-28 - 2022-03-14

#### **ISSUE DATE**


2022-03-14

#### **PAGES**

5

#### **DOCUMENT CONTROL NUMBER**

LFT-APAC-SHF-OP-10k(May 1, 2021) © 2021 INTERTEK

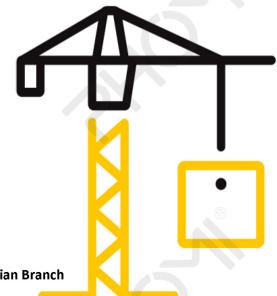

Intertek Testing Services Shenzhen Ltd. Shanghai Fengxian Branch





Intertek Testing Services Shenzhen Ltd. Shanghai Fengxian Branch Plant 5, No. 6958 Daye Road, Fengxian District, Shanghai, China Tel: +86 21-61136116 Fax: 021-61189921

Website: www.intertek.com

#### **Test Report**

#### **Statement**

- 1. This report is invalid without company's special seal for testing on assigned page.
- 2. This report is invalid without authorized person's signature.
- 3. This report is invalid where any unauthorized modification indicated.
- 4.Don't copy this report in partial (except full copy) without any official approval in written by our company. This report is invalid without re-stamping the special seal for testing in copying report.

5.Any holder of this document is advised that this report is for the exclusive use of Intertek's Customer and is provided pursuant to the agreement between Intertek and its Customer. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. This report was made with due care within the limitation of a defined scope of work and on the basis of information, materials and instructions received from the Customer or its nominated third parties. Intertek is under no obligation to refer to or report upon any facts or circumstances which are outside the specific instructions received and accepts no responsibility to any parties whatsoever, following the issue of the report, for any matters arising outside the agreed scope of the works. The tests results are not intended to be a recommendation for any particular course of action. Customer is responsible for acting as it sees fit on the basis of such results.

6.Intertek's written consent is required to use Intertek's name or logo on the object, product or service being tested. The observations and test results in this report relate only to the sample under test. This report alone does not indicate that the item, product or service has passed any Intertek certification program.

7. The report was digital signed by Shang Hai, Intertek Group plc, please using Adobe Acrobat Reader to verify the authenticity.





Intertek Testing Services Shenzhen Ltd. Shanghai Fengxian Branch Plant 5, No. 6958 Daye Road, Fengxian District, Shanghai, China Tel:+86 21-61136116 Fax: 021-61189921

Website: www.intertek.com

#### **Test Report**

Issue Date: 2022-03-14 Intertek Report No. 220228007SHF-001

Applicant: PHOMI MCM CO., LTD.

Address: 15/F, BUILDING A2, MODERN AVENUE, SCIENCE CITY, HUANGPU DISTRICT, GUANGZHOU

Attn: Robin Lei

Test Type: Performance test, samples provided by the applicant.

#### **Product Information**

Product Name	Phomi Flexi Econic Clay		Brand	1	
Sample	Good Condition		Sample Amount	7 pcs	
Description		Good Condition		Received Date	2022-02-25
Sample ID		Model		Spo	ecification
S220228007SHF.001		Slate series		1200*600mm	

#### **Test Methods And Standards**

Test Standard	ASTM E84-19a Standard Test Method for Surface Burning Characteristics of Building Materials
Specification Standard	/
Test Conclusion	The samples were tested according to the above standards, and the results are shown in the following page.

#### Note:

1. This report relates specifically to the sample(s) that were drawn and provided by the applicant or their nominated third party. The reported result(s) provide no warranty or verification on the sample(s) representing any specific goods and/or shipment and only relate to the sample(s) as received and tested.

**Report Authorized** 

Name: Harrison Li

Title: Reviewer

Name Lu Cheng 以中間を対 ject Engineer

Version: 1 May 2021 Page 3 of 5 LFT-APAC-SHF-OP-10k

NZHEA LATE

b检测专



Issue Date: 2022-03-14 Intertek Report No. 220228007SHF-001

#### Test Items, Method and Results:

Test Method: ASTM E84-19a Standard Test Method for Surface Burning Characteristics of Building Materials

#### **Specimen Mounting Method:**

The 24.02-ft. long test specimen was consisted of six 3.94-ft. long x 23.62-in. wide x 0.11-in. thick and one 0.39-ft. long x 23.62-in. wide x 0.11-in. thick "Phomi Flexi Econic Clay".

Per sponsor's requirement, surface with patterned texture was exposed to the fire.

The specimen was supported with 0.25-in. diamerter metal rods that were spaced approximately every 24-in.

#### Test Observation (min:sec)


Melting	Blistering	Transient Ignition	Steady Ignition	Flaming drops
1	/		1:09	1
Delamination	Sagging	Shrinkage	Cracking	Floor Flames
/	/	/	/	1

#### **Test Result**

Flame Spread Index (FSI)	25	Smoke Developed Index(SDI)	20
lame spread graph			
20- 15- 10- 5-		F1 Spread	

Time (Sec)

#### Smoke developed graph

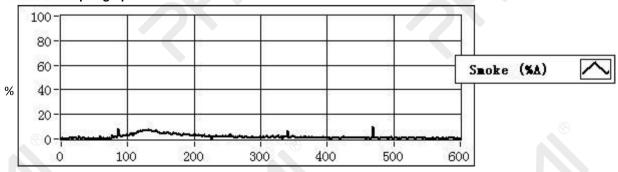

Time (Sec)

Page 4 of 5



Issue Date: 2022-03-14

Intertek Report No. 220228007SHF-001

#### Appendix A: Sample Received Photo





#### **Revision:**

NO.		Date	Changes	
	220228007SHF-001	2022-03-14	First issue	





# **Environmental Product Declaration**

**EPD** 

In accordance with ISO 14025 and EN 15804:2012+A2:2019 for:



PHOMI MCM CLADDING







#### Conducted by



Owner of the declaration:

Issue date: Valid until: **PHOMI Holding** 

2022-03-25

2027-03-26

An EPD should provide current information and may be updated if conditions change. The stated validity is therefore subject to continuous updating and tracking of changes.



#### **GENERAL INFORMATION**

#### Owner of the declaration:

PHOMI Benelux Hilversumsestraatweg 1B 3744KB Baarn Netherlands

#### **Declared product / functional unit:**

1 m<sup>2</sup> of PHOMI MCM CLADDING

#### Scope:

This declaration refers to MCM Cladding, produced by PHOMI Benelux, a member of PHOMI Holding. The declared reference product in this EPD is 1m<sup>2</sup> of Standard Line cladding products used for façades, floors, ceilings and indoor/outdoor pathways.

The PHOMI CLADDING presented in this declaration is produced in Laibin (China) transported to Amsterdam. The production data corresponds to the year of 2021.

The EPD owner has the sole ownership, liability, and responsibility for the EPD.

EPDs within the same product category but from different programs may not be comparable. EPDs if not complied with EN 15804 are not comparable. For further information about comparability, see EN 15804 and ISO 14025.

#### DETAILED PRODUCT INFORMATION

The LCA study is done according to the PCR for kaolin and clay products. The product that is reported in this document is cladding from PHOMI based on the Standard Line. The products of the Standard Lines (SL) are the classic PHOMI MCM products. The core ranges of the SL are characterized by their thinness and light weight. The maximum dimensions are  $1200 \times 600$  mm, with an average width around 3mm. The density between the various products in the Standard Line is highly dependable on the desirable cladding and therefore very different.

Phomi cladding is nearly completely made of natural components (see table 1 below). The main ingredients are Kaolin (Clay from China) and Quartz Sand. The material is primarily used within the built environment as a cladding material, floor material, ceiling material, or at the inner and outer façade of buildings. Special Moulds are used in combination with special innovative technology that makes sure that the texture of each and every produced slab is unique.

Component (>1%)	[kg / % ]
Kaolin Clay	53%
Quartz Sand	43%
Binder material	4%

Tabel 1 Components of Phomi MCM cladding







Figure 2 Quartz Sand



#### **SCOPE & TYPE**

The factory for the cladding created by Phomi is located in China in the city Laibin. From there the cladding is shipped all over the world, as Phomi is active in 30 countries spread over Asia and Europe and is also active in Canada.

The scope of this EPD is the entire life cycle. The following modules have been included. The product stage (A1-A3): extraction of raw materials and energy (A1), transport to the production location (A2) and the production phase (A3). The construction stage (Module A4 - A5), the use stage (Module B), End-of-Life (Module C) and reuse and recycling stage (Module D) are also included.

The chosen Reference Services Life (RSL) of 50 years is the same as from PHOMI's actual technical life span.

PRODUCT STAGE			RUCTION AGE	USE STAGE				END OF LIFE STAGE				BENEFITS AND LOADS BEYOND SYSTEM BOUNDRIES				
Raw materials	Transport	Production	Transport to building site	Installation into building	Use/application	Maintenance	Repair	Replacement	Refurbishment	Operational energy use	Operational water use	Deconstruction/demolition	Transport	Waste processing	Disposal	Reuse, Recovery, Recycling
A1	A2	A3	A4	A5	B1	B2	В3	B4	B5	В6	В7	C1	C2	C3	C4	D
x x x		Х				Х	Х	Х			Х					

x = modules assessed


The EPD is compiled using the "NMD Bepalingsmethode Milieuprestatie Bouwwerken v1.0" as PCR, Ecoinvent v3.5 & 3.6 for background processes, and Mobius Software to make the LCA calculations. The main impact categories have been calculated with the characterization factors in "EN 15804 +A2 Method v.100/ EF 3.0 Normalization and weighting set" and "NMD Bepalingsmethode 1.0, jul 2020 (NMD3.3) V.3.04/MKI-SBK single-score.

#### REPRESENTATIVENESS

This EPD represents all of the Phomi MCM cladding from the Standard Line. Variability of the results for the Phomi MCM cladding is based on the transport distances from Guangzhou (China) to different ports in Europe. This effects the outcome of the LCA results calculated to the environmental cost indicator with a differ of maximum 9%.



#### LCA PROCESS DIAGRAM ACCORDING TO EN 15804

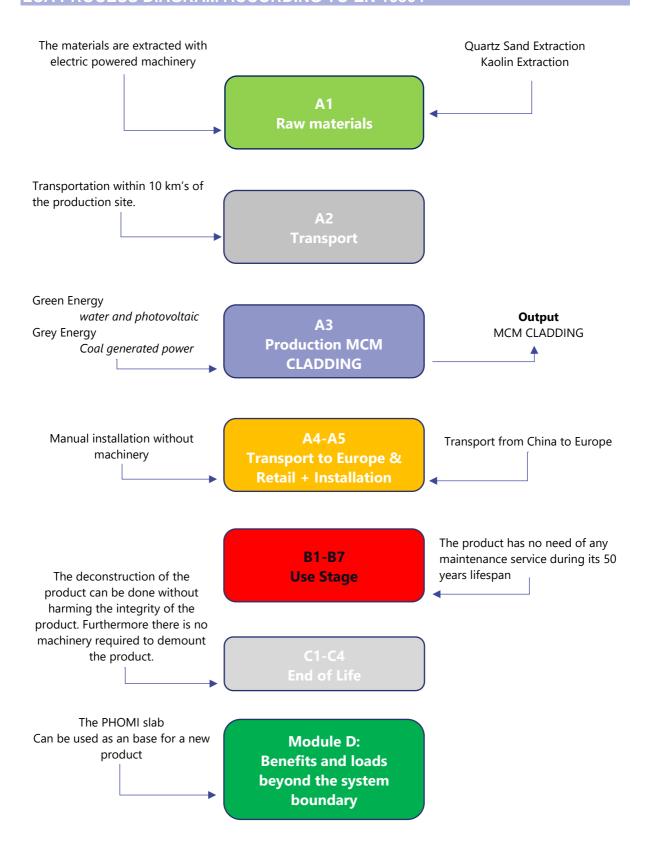



#### LCA RESULTS - EVIRONMENTAL IMPACT PER FUNCTIONAL UNIT

Impact category name	Reference unit	<b>A1</b>	A2	А3	A4-A5	B1-B7	C1-C4	D
ADPF	kg Sb eq	3,89E-03	3,94E-05	2,98E-03	5,89E-03	0,00E+00	2,80E-04	-1,18E-03
ODP	kg CFC-11 eq	4,56E-08	9,50E-10	1,67E-08	1,51E-07	0,00E+00	5,91E-09	-1,43E-10
POCP	kg C2H4 eq	1,82E-04	3,23E-06	1,34E-04	1,05E-03	0,00E+00	2,14E-05	-4,49E-06
AP	kg SO2 eq	2,82E-03	2,35E-05	2,75E-03	1,86E-02	0,00E+00	1,75E-04	1,53E-04
ADPE	kg Sb eq	1,80E-05	1,37E-07	2,71E-06	8,35E-06	0,00E+00	6,97E-07	-1,08E-07
EP	kg PO4 eq	2,70E-04	4,62E-06	2,47E-04	2,10E-03	0,00E+00	3,28E-05	1,18E-05
GWP	kg CO2 eq	5,54E-01	5,35E-03	4,62E-01	9,11E-01	0,00E+00	3,83E-02	1,31E-01

ADPF = Abiotic depletion, fuel
ODP = Ozone layer depletion
POCP = Photochemical oxidation

AP = Acidification

ADPE = Abiotic depletion, non-fuel

EP = Eutrophication GWP = Global warming

#### LCA RESULTS – RESOURCE USE PER FUNCTIONAL UNIT

Impact category name	Reference unit	A1	A2	А3	A4-A5	B1-B7	C1-C4	D
PERM	MJ	0,00E+00						
PENRM	MJ	0,00E+00						
NRSF	MJ	0,00E+00						
RSF	MJ	0,00E+00						
PERE	MJ	0,00E+00						
SM	kg	0,00E+00						
PENRE	MJ	0,00E+00						
PENRT	MJ	7,14E+00	8,64E-02	4,76E+00	1,31E+01	0,00E+00	5,97E-01	-1,87E+00
FW	m3	7,37E-03	9,92E-06	2,73E-03	9,47E-04	0,00E+00	1,89E-04	-5,09E-03
PERT	MJ	5.29E-01	1.02E-03	2.01E+00	9.75E-02	0.00E+00	1.57E-02	-1,77E-02

PERM = Energy, primary, renewable, materials PENRM = Energy, primary, non-renewable, materials

NRSF = Secondary fuel, non-renewable RSF = Secondary fuel, renewable

PERE = Energy, primary, renewable, excluding materials

SM = Secondary material

PENRE = Energy, primary, non-renewable, excluding materials

PENRT = Energy, primary, non-renewable

FW = Water, fresh water use PERT = Energy, primary, renewable



#### LCA RESULTS - OUTPUT FLOWS AND WASTE CATEGORIES

Impact category name	Reference unit	A1	A2	А3	A4-A5	B1-B7	C1-C4	D
HWD	kg	6,48E-06	2,06E-07	1,98E-05	1,55E-05	0,00E+00	1,27E-06	-2,80E-06
MFR	kg	0,00E+00						
CRU	kg	0,00E+00						
EET	MJ	0,00E+00						
RWD	kg	1,46E-05	5,35E-07	2,37E-06	8,48E-05	0,00E+00	3,23E-06	-1,88E-06
EEE	MJ	0,00E+00						
NHWD	kg	4,37E-02	5,16E-03	3,72E-02	3,13E-01	0,00E+00	3,79E-02	-2,69E-03
MER	kg	0,00E+00						

HWD = Waste, hazardous
MFR = Materials for recycling
CRU = Components for re-use
EET = Exported energy, thermal

RWD = Waste, radioactive

EEE = Exported energy, electric NHWD = Waste, non-hazardous

MER = Materials for energy recovery



#### ADDITIONAL TECHNICAL INFORMATION

#### Material extraction (A1)

The different base materials used to form the MCM CLADDING have been connected to representative LCA references.

#### **Transport to factory (A2)**

Means of transport were modelled based on supplier information from the transporter to the production location. It is important that return transports are also taken into account, stated in EN-17160. In the transport reference used in the LCA program this is already incorporated and therefore taken into account.

#### Manufacturing (A3)

All products and processes relevant to producing the mcm cladding are included in this study. PHOMI MCM is partly produced with renewable and partly with coal-generated electricity. The steam from the coal powerplant's cooler is used to create conditions where the MCM powder is mixed with water to form a slurry. After the steam cools down, it condensates and this water is re-used, so that there is no form of water waste.

#### **Transport to Europe and in Europe to retail (A4)**

The product is shipped to Europe with large container vessels. From there it is shipped to retail with a fixed value.

#### Installation (A5)

The product does not need any use of machinery, only manual labor is needed by installation.

#### Use Phase (B1 - B7)

Stated by PHOMI the product has no need of any maintenance, repair, replacement or refurbishment under conditions of normal use during its 50 years lifespan. Coating of the cladding is optional and therefore not considered in the scope of this research.

#### End of Life (C1 - C4)

The deconstruction of the product can be done without harming the integrity of the product or products nearby, furthermore there is no machinery required to demount the product. At the end of its lifecycle the product carries close to 100% of its initial physical mass and content, therefore the product is crushed into smaller fractions before it goes to a local material processor.

#### Module D (Reuse, recovery, recycling)

The recycle potential of the product is very high. As stated, should it be crushed into smaller fractions before it can be used to mix with other similar materials out of which it was essentially created in order to become a new product again.





