



ARTISTRY IN WOOD





CLASSIC

Smooth floors have a classic elegance that naturally lends itself to many species. Available in various species, grades, widths and colors, the possibilities are endless.


































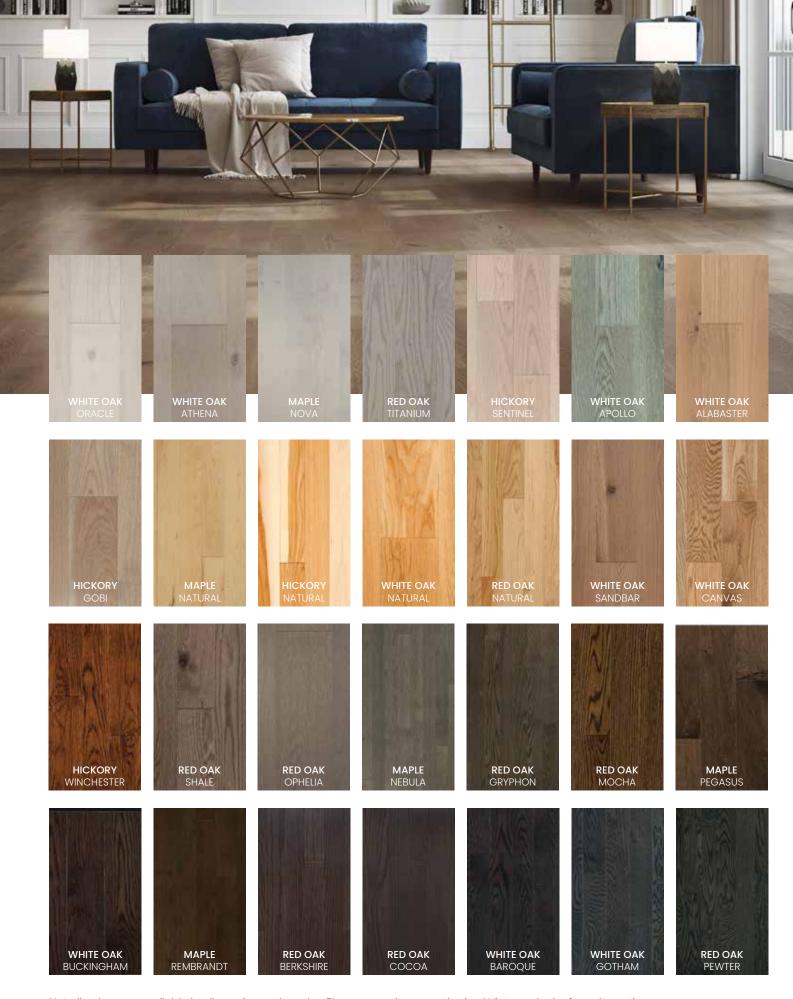

Not all colors are available in all species and grades. Please consult your authorized Vintage dealer for color options. Color swatches may not be an accurate representation of actual color. Contact a Vintage dealer to view sample.

FLOOR STRUCTURES

PIONEERED® SOLID



NORTHERN SOLID SAWN® STRUCTURED



SOLID SAWN® **STRUCTURED**



- Small "micro v": Means smaller seams and less dirt build-up
- 2 3/4" (19 mm) Solid hardwood

Superior lengths: 12" - 79"* (305 mm - 2007 mm)

3 species, 4 textures, 3 widths, and over 65 colors to choose from



- 1 4 mm Sawn wear lamella
- 2 SPF finger core, predominantly Qtr. Sawn
- 3 Wood back

Superior lengths: 15" - 82"* (373 mm - 2086 mm)

5 species, 4 textures, 4 widths, 3 grades and over 66 colors to choose from



- 1 4 mm Sawn wear lamella
- 2 Solid finger lumber core
- 3 Hardwood back

Superior lengths: 14" - 114"* (356 mm - 2896 mm)

3 textures, 4 widths, and 13 colors to choose from

LENGTHS*

Select-V: 12" - 79" Average 32" (305 mm - 2007 mm Average 813 mm)

Character: 12" - 79" Average 30" (305 mm - 2007 mm Average 762 mm)

LENGTHS*

Select-V: 15" - 70" Average 33" (373 mm - 1778 mm Average 838 mm) Herringbone: 3 1/4" x 14.68" (84 mm x 373 mm)

Character: 20" - 82" Average 42" (511 mm - 2086 mm Average 1067 mm) Herringbone: 5" x 30" (127 mm x 762 mm) Chevron: 5" x 24.4" (127 mm x 620 mm)

LENGTHS*

Character 5", 7"

16"-84" Average 44" (406 mm - 2134 mm Average 1118 mm)

Character 8", 10" long length

24" - 114" Average 58" (609 mm - 2896 mm Average 1473 mm)

RELATIVE HUMIDITY CHART







RELATIVE HUMIDITY CHART









RELATIVE HUMIDITY CHART











^{*} Lengths will vary by widths. See Vintage Dealer for more information
** Consult Vintage's radiant heat compliance information available at vintageflooring.com
*** Floated Installation: Relative humidity warranty for Northern Solid Sawn* and Solid Sawn* is 30 - 60%.

GLOSS LEVEL

PEARL

A modern low gloss finish that helps to hide everyday wear and tear such as scratches and dents.

UVF

Ultra low gloss finish that enhances the richness of the wood while providing easy maintenance.





WARRANTY

All Pioneered® Solid, Solid Sawn® Structured and Northern Solid Sawn® Structured have a lifetime Structural and Stability warranty as long as relative humidity ranges are maintained as per warranty of product.


LIFETIME stability warranty

LIFETIME structural warranty 35 YEARS residential wear warranty

3 YEARS commercial wear warranty

See warranty brochure for more information. Consult your authorized Vintage dealer or our website for complete warranty information.

RELATIVE HUMIDITY CHART

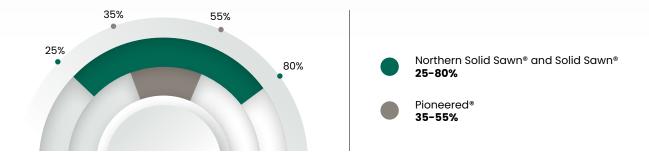

SPECIES

MAXIMUM CHOICE, FLEXIBILITY AND VALUE




MAPLE
Hardness: 1450
Available in grades:
Select-V and Character



RED OAK Hardness: 1290 Available in grades: Select-V and Character



HICKORYHardness: 1820 Available in grade: Character

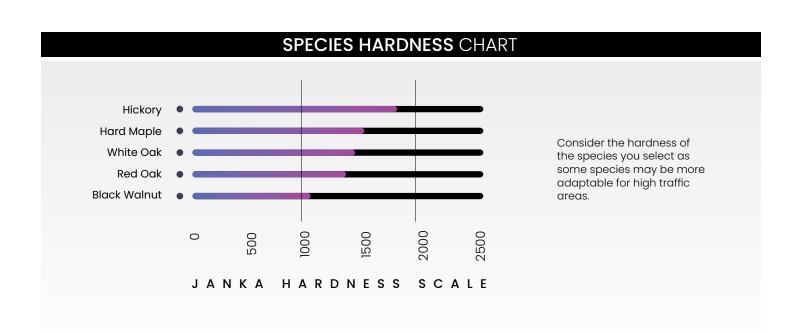

THE VINTAGE COMMITMENT






The Vintage Commitment... using state-of-the art technology, our specialized team of wood experts continuously strives to offer our customers the best quality products and finishes in the market.

Rigorous quality control measures and continuous improvements to our manufacturing process are undertake to ensure our systems meet the toughest standards. Our Pearl and UVF floors are finished with our specially formulated finish, guaranteed to deliver 35 years of lasting protection and beauty.

Vintage ensures manufacturing is in compliance with all applicable laws to minimize harmful effects of manufacturing on the environment. All Vintage finishes are 99% VOC & Formaldehyde free.



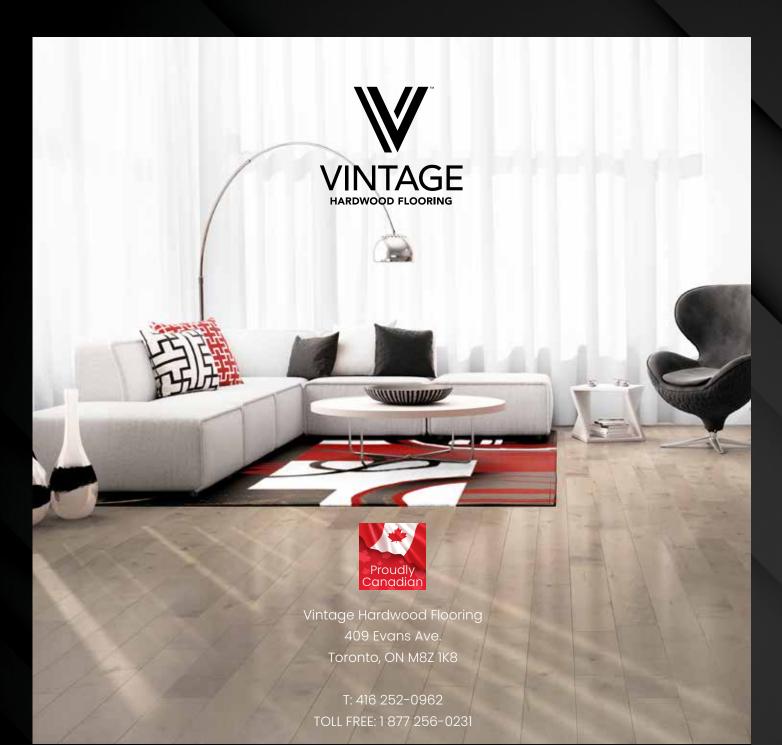

Visit vintageflooring.com mail@vintageflooring.com







