

BOOTH SPECIFICATIONS

- * UNIT MODEL: SDDP2412CSB ETL-LISTED
- * LENGTH= 24'-4" O.D. / 24'-0" I.D.
- * WIDTH= 16'-4" O.D. / 14'-0" I.D.
- * HEIGHT= 10'-10" O.D. / 9'-0" I.D.
- * DOOR HEIGHT= 8'-0"
- * DOOR WIDTH= 10'- 0"
- * (20) 20"X20"X2" FIBERGLASS ARRESTOR PADS

EXHAUST AIR FAN

- * TWO EXHAUST FANS: 25 1/2" DIAMETER NON-SPRAKING BLADE
- * TWO MOTORS: 2 HP. 230 VAC 3-PHASE 60Hz.
- * VOLTAGE= 230 VAC @ 125% AMPACITY=8.5 EACH
- * C.F.M. RATING=14,000 @ 1/2" STATIC PRESSURE

CONSTRUCTION

- * 18 GA. G-90 GALVANIZED STEEL PANELS WITH "LOCKING" SEAL FLANGES.
- * PANEL ASSEMBLY TYPE= 1/4" X 3/4" SELF-TAPPING SCREWS ON 12" CENTERS TYP.
- * DOOR FRAME CONSTRUCTUON: 2" X 1-1/2" X 1/4" HRS ANGLE.
- * DOOR HINGES: 4" X 4" X HEAVY DUTY STEEL (3-EA. PER DOOR)


LIGHTING SPECIFICATIONS

- * LIGHT FIXTURE TYPE= L.D.P.I. 4-TUBE FLORESCENT U. L. LISTED
- * VOLTAGE= STANDARD: 120 / 60 HRTZ. AMPACITY: 1.0 PER FIXTURE.
- * QUANTITY= 12-EA. TOTAL.
- * TYPE = (11) STANDARD OPEN TYPE.
- * TYPE = (1) CLASS 1 DIVISION 2 TYPE.



MATERIALS

CONFORMS TO NFPA STD.33

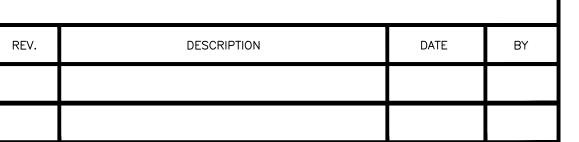



AFC Finishing Systems 250 AIRPORT PARKWAY, OROVILLE, CA 95965

(800) 33I-7744 (530) 533-0I79 (FAX) http://www.afc-ca.com email: sales@afc-ca.com THIS DRAWING IS THE PROPERTY OF AFC FINISHING SYSTEMS AND IS NOT TO BE LOANED, COPIED OR DUPLICATED UNLESS IN DIRECT CONNECTION WITH AFC FINISHING SYSTEMS. ALL RIGHTS RESERVED. THIS DRAWING MUST BE RETURNED UPON REQUEST BY AFC FINISHING SYSTEMS.

DRAWN FOR:

DESCRIPTION:
SIDE DOWN DRAFT MODEL: SDDP2412CSB ELEVATION DRAWING CHECKED BY: J.BARTON 04/08/2019 DRAWING NAME: INSTALLED BY: FIELD CHANGED BY: SDDP2412CSB-9H-ELEVATION