



# PRODUCT **BROCHURE**

LED Sky Ceilings & LED Wall Panels

ENHANCING PATIENT EXPERIENCE

Trusted by **100+** NHS Hospitals & other leading brands.



We create stunningly realistic virtual windows that illuminate & soften healthcare spaces, enhancing patient experience and staff morale.



#### Positive Distraction

Reducing anxiety & creating a calming environment for patients during procedures & treatments.



#### Improved Recovery

Numerous studies have shown a positive correlation between biophilic design & patient recovery times.



#### Reduced Delirium

Helping patients maintain a sense of time & regulating the human body's natural circadian rhythm.



#### Evokes Memories

Familiar local scenery can help to provide comfort & instil a sense of calm among Dementia & Alzheimer patients.



#### Reduced fatigue

Creating relaxing, calming, breakout sanctuaries for staff helping them to recharge.



#### Promotes Productivity

Brighter spaces with captivating imagery succeed in providing inspiration & help to improve staff morale.





Past Project  
**Healthcare**

**NHS**  
**Mater Hospital**  
Belfast Health and Social Care Trust

“We are absolutely delighted with the LED sky lights we have had fitted in our procedural suite.

They have far exceeded our expectations and are an amazing addition. The lights have created a very welcoming, soothing and calming environment. Patients regularly comment on these factors and feel they are wonderful to look up at.”

**Margaret Cummins**  
Ward Sister

ENHANCING PATIENT EXPERIENCE



# WHY CHOOSE US?

We listen, and treat each project as a consultative, design-led process. We’re here to help you transform your space.

1500+  
Projects Completed  
We have invaluable project-based experience spanning the length and breadth of the UK & Ireland.

2 year  
Minimum Warranty  
Our products are proudly manufactured in the UK & EU and some are the sum of high quality, trusted brand componentry.

**ASPIRE**

100+  
NHS Hospitals Supplied  
We’re a trusted NHS partner providing solutions that help to transform the patient experience.

4 weeks  
Custom Manufacture  
We create high-impact, custom solutions to suit each project within 4 weeks.





# LED SKY CEILINGS

Vividly realistic virtual skylights in a range of sizes, suitable for any ceiling type, with endless image options.



**Ultra-efficient LED**  
down to 12.5W



**6500K Daylight**  
colour temperature



**2 Year Warranty**  
as standard

## HOW IT WORKS

1

### Choose a panel size

5 stock size options, or create your own.

2

### Confirm the quantity

Any number of panels is possible.

3

### Confirm the configuration

Arrange them any way you like. We'll configure the image to suit.

4

### Select your image/s

Opt for our curated range, Shutterstock.com or, your own supply.

5

### Choose a mounting method

Suspended ceiling grid lay-in, surface mount or cable suspended.

6




### Choose a control option

Stick with simple on/off or, opt for something with greater flexibility and impact.




## Range of LED Panel Sizes

We offer 5 stock LED Sky Ceiling Panel sizes. We can also create custom sizes to suit your project.

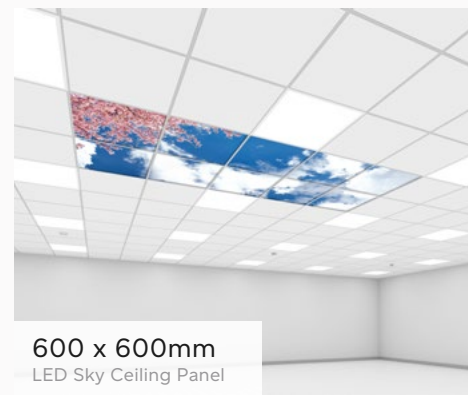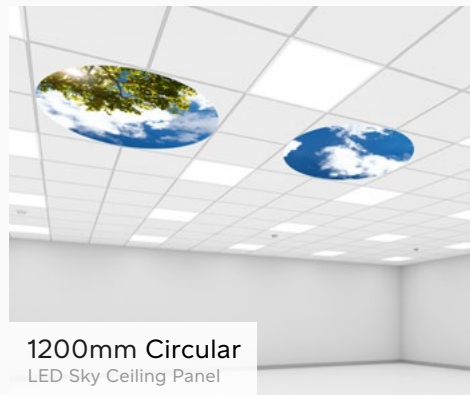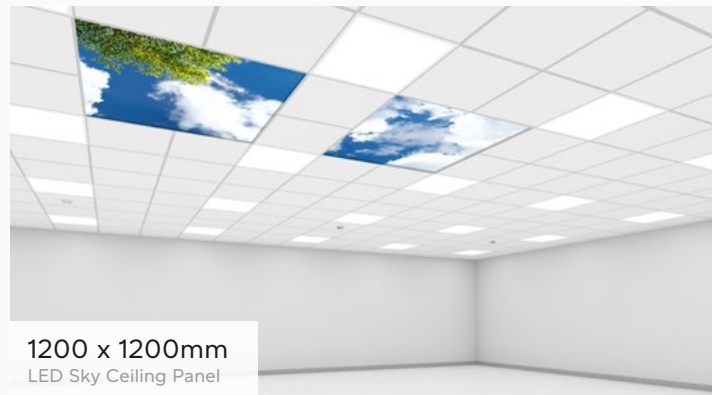

## Ultra-efficient Daylight LED Technology

We manufacture our LED Sky Ceiling panels with high lumen-per-watt SMD LEDs from trusted brands (Samsung® & Cree®). Combined with our custom-designed light diffuser, these SMD LEDs deliver a flicker-free, true-daylight colour temperature of 6500K from as little as 12.5W per panel.

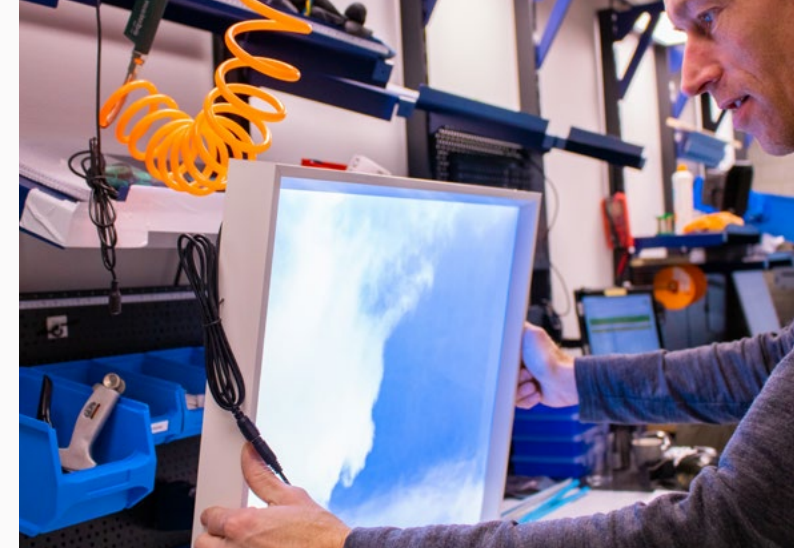



## Any quantity. Any configuration.

We create custom, expanded LED Sky scenes, with no repeating patterns, in any configuration, across any number of panels.




## UV Stable, High Resolution Imagery


Our LED Sky Ceiling panels are strikingly realistic. We use carefully selected, high-resolution imagery to create sky scenes that are true to life & print using specialist UV-pigmented ink ensuring our colour tones stand the test of time.

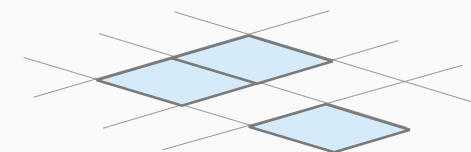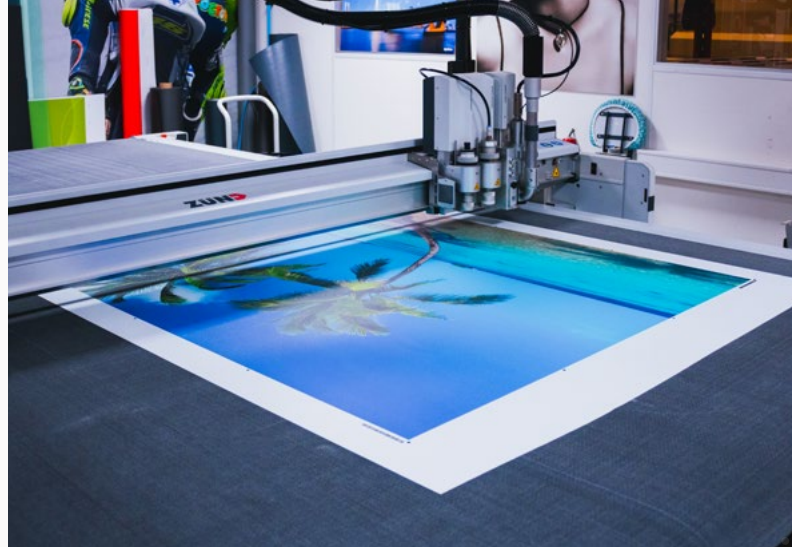


Fit into standard ceiling grid

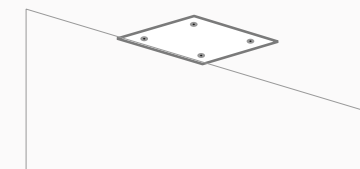

Surface Mount to solid ceilings



Cable suspend from solid ceilings

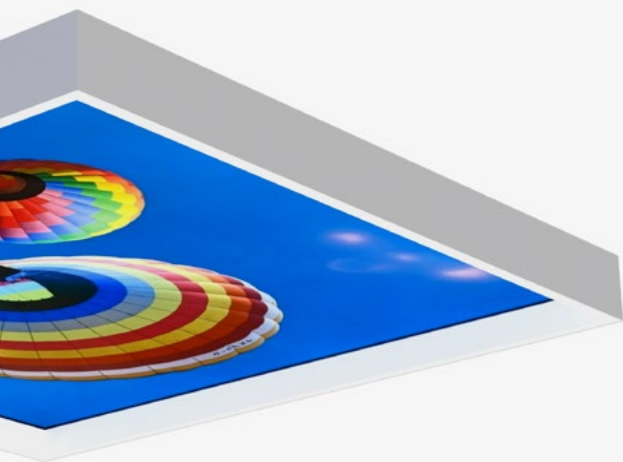

ENHANCING PATIENT EXPERIENCE

## Recessed, Three-dimensional Frame

Our LED Sky Ceiling Panels feature a distinct 3D recess. The surrounding aluminium frame elevates the image behind the ceiling level, resulting in a realistic virtual window effect.

[aspireinside.com](http://aspireinside.com)



## Mount to any ceiling

Our panels fit seamlessly within a standard lay-in ceiling grid (15 or 24mm). Alternatively you can surface mount to solid ceilings or cable suspend from them.



## Certified & Safe

All products are CE, UKCA & achieve the highest, independently tested, TP<sub>(a)</sub> Fire rating. We also supply all panels with independent fail-safe steel cables as standard.


ASPIRE





## Choose from 000's of Sky image options

Choose from our curated range or the extensive Shutterstock.com library. You can even supply your own.

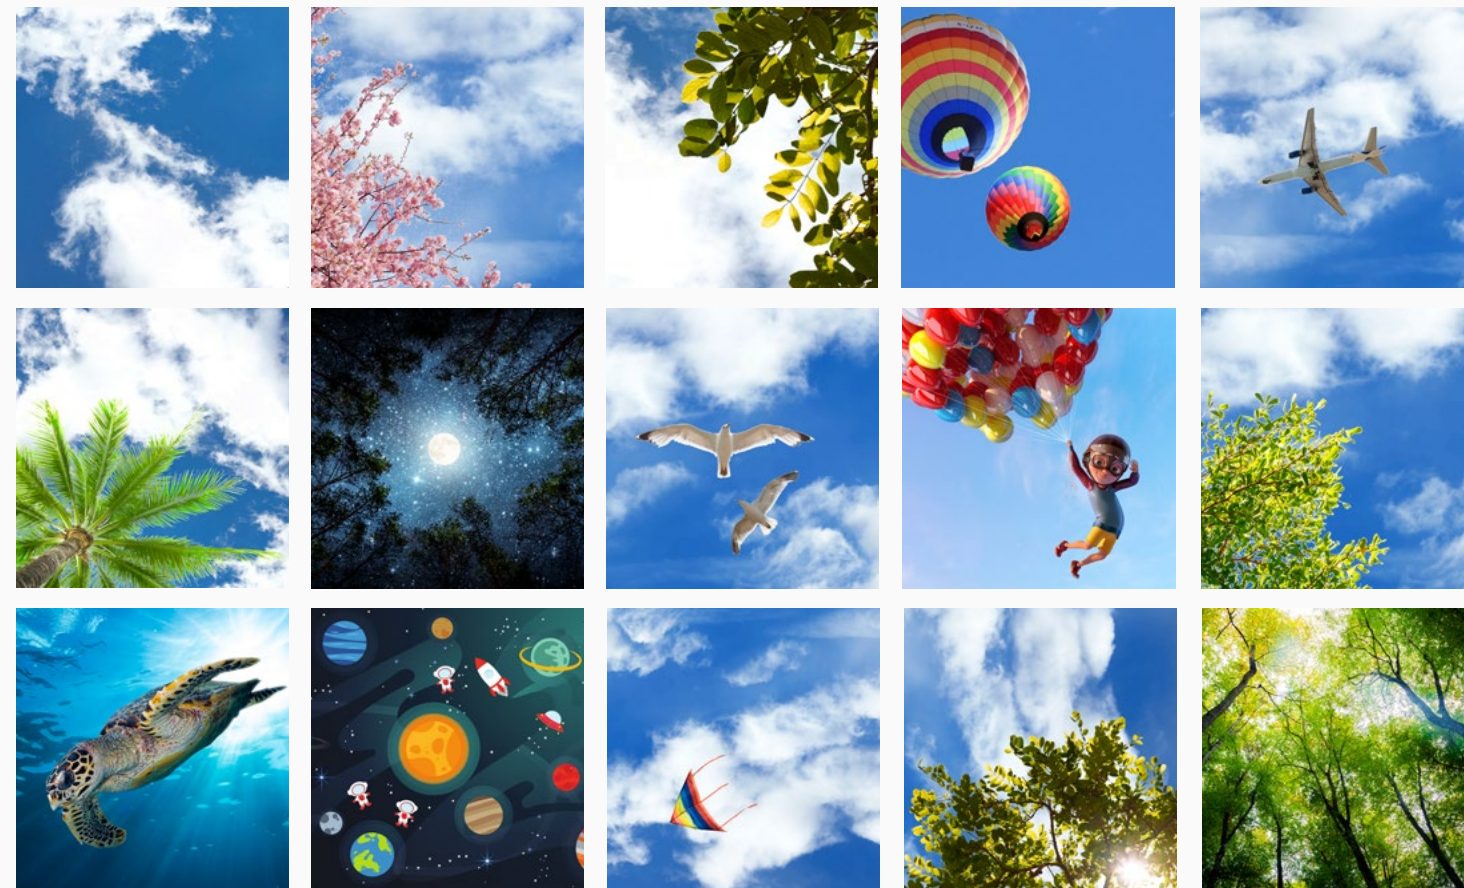

Need more inspiration? [Download](#) our image guide.



LED Sky Ceiling Panel Range | Technical Summary

Model Type	600 x 600mm LED Sky Ceiling Panel			600 x 1200mm LED Sky Ceiling Panel			1200 x 1200mm LED Sky Ceiling Panel			1200 x 1800mm LED Sky Ceiling Panel		1200mm Circular Diameter LED Sky Ceiling Panel	
	Standard	Plus (Additional Lumen)	Human Centric (Tuneable White)	Standard	Plus (Additional Lumen)	Human Centric (Tuneable White)	Standard	Plus (Additional Lumen)	Human Centric (Tuneable White)	Standard	Human Centric (Tuneable White)	Standard	Human Centric (Tuneable White)
Product Code	LC6060	LC6060P	LC6060H	LC60120	LC60120P	LC60120H	LC120120	LC120120P	LC120120H	LC120180	LC120180H	LC120	LC120H
Exact Dimensions (L x W x D)	592 x 592 x 51.2mm	592 x 592 x 51.2mm	592 x 592 x 51.2mm	592 x 1192 x 51.2mm	592 x 1192 x 51.2mm	592 x 1192 x 51.2mm	1192 x 1192 x 51.2mm	1192 x 1192 x 51.2mm	1192 x 1192 x 51.2mm	1192 x 1792 x 51.2mm	1192 x 1792 x 51.2mm	1192 x 1192 x 51.2mm	1192 x 1192 x 51.2mm
Light Source	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED
Colour Temperature	6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin	6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin	6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin
MacAdam	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step
CRI:	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
UGR:	<13	<13	<13	<13	<13	<13	<13	<13	<13	<13	<13	<13	<13
Opening angle	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees
Input voltage	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz
Power Consumption	12.5 watt	25 watt	40 watt	25 watt	50 watt	40 watt	50 watt	100 watt	80 watt	75 watt	80 watt	80 watt	80 watt
Lumen Output	1250 lumen	1690 lumen	2704 lumen	1690 lumen	3380 lumen	2704 lumen	3380 lumen	6760 lumen	5408 lumen	5070 lumen	5408 lumen	5408 lumen	5408 lumen
LED Current	520 mA (24V)	1040 mA (24V)	1660 mA (24V)	1040 mA (24V)	2080 mA (24V)	1666 mA (24V)	2080 mA (24V)	4020 mA (24V)	3200 mA (24V)	3125 mA (24V)	3200 mA (24V)	3300 mA (24V)	3300 mA (24V)
Lifespan L70@Ta 25C:	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs
Working Temperature	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C
Storage Temperature	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C
IP Rating	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III
Connection	1nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	1nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector
LED Driver	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.
Frame Material	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated	Powder-coated
	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium	Aluminium
Frame Colour	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)
Dimming	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).
Weight	6 kg	12 kg	6 kg	12 Kg	12 Kg	12 Kg	24 kg	12 Kg	24 kg	36 kg	24 kg	36 kg	24 kg
Graphic Print	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection
Image	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom
Fire Rating	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified
Independent Safety Cables	Steel 1m	Steel 1m	Steel 1m	Steel 1m	Steel 1m	Steel 1m	Steel 1m (2nr)	Steel 1m (2nr)	Steel 1m (2nr)	Steel 1m (4nr)	Steel 1m (4nr)	Steel 1m (2nr)	Steel 1m (2nr)
Standard Warranty	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years


Detailed technical specifications are available for download from the ""Technical Resources" section on [www.aspireinside.com](#)





# LED WALL PANELS

High-resolution virtual windows showcasing beautiful landscape vistas. Choose from a range of sizes or, create one.



**Ultra-efficient LED**  
down to 25W




**6500K Daylight**  
colour temperature







**2 Year Warranty**  
as standard

## HOW IT WORKS

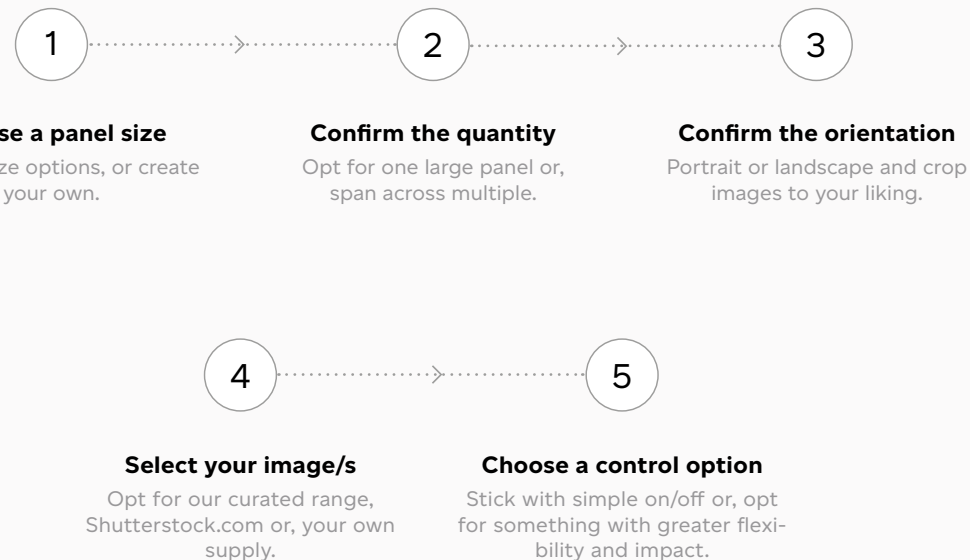

## Range of LED Panel Sizes

We offer 5 stock LED Sky Ceiling Panel sizes. We can also create custom sizes to suit your project.

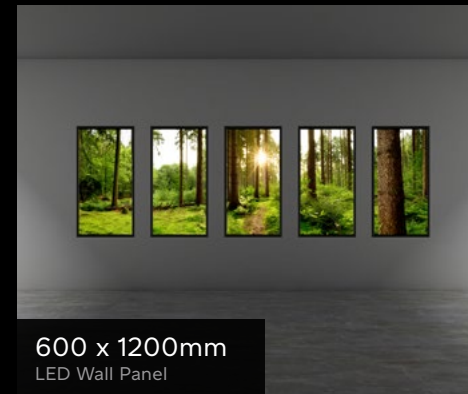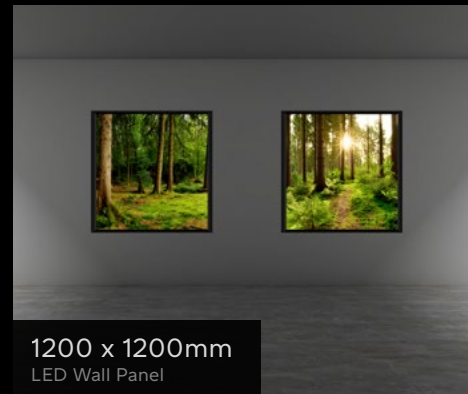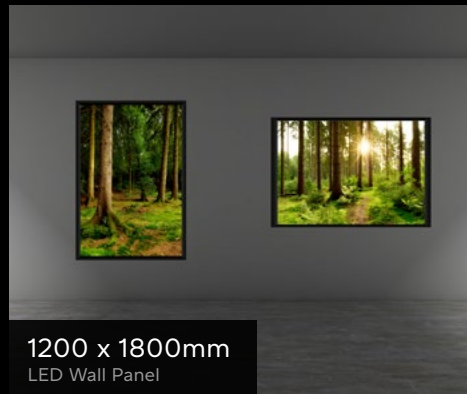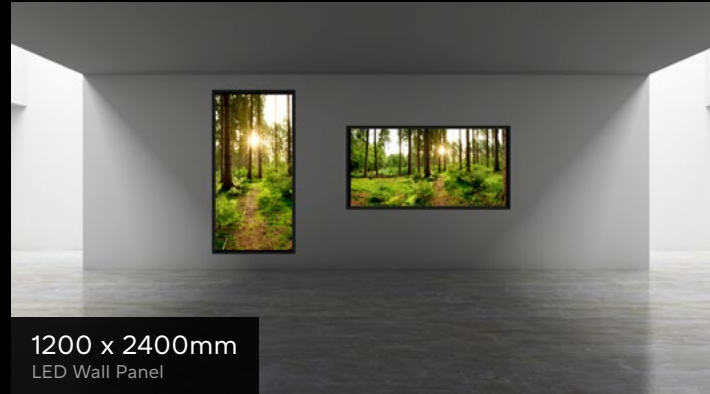

## Ultra-efficient Daylight LED Technology

We manufacture our LED Wall panels with high lumen-per-watt SMD LEDs from trusted brands (Samsung® & Cree®). Combined with our custom-designed light diffuser, these SMD LEDs deliver a flicker-free, true-daylight colour temperature of 6500K from as little as 25W per panel.



## UV Stable, High Resolution Imagery

Our LED Wall panels are strikingly realistic. We use carefully selected, high-resolution imagery to create landscape scenes that are true to life & print using specialist UV-pigmented ink ensuring our colour tones stand the test of time.





## Recessed, Three-dimensional Frame

Our LED Wall Panels feature a distinct 3D recess created by the surrounding aluminium frame, creating a realistic virtual window effect.



aspireinside.com

ENHANCING PATIENT EXPERIENCE



### Simple Mounting

Each panel comes with four pre-installed, heavy duty corner brackets that slide into a set of 4 wall fixings.

ASPIRE



### Certified & Safe

All products are CE, UKCA & achieve the highest, independently tested, TP<sub>(a)</sub> Fire rating. We also supply all panels with independent fail-safe steel cables as standard.







# Choose from 000's of Landscape image options

Choose from our curated range or the  
extensive Shutterstock.com library.  
You can even supply your own.



Need more inspiration? [Download](#) our image guide.





LED Wall Panel Range | Technical Summary

Model Type	600 x 1200mm LED Wall Panel			1200 x 1200mm LED Wall Panel			1200 x 1800mm LED Wall Panel		1200 x 2400mm LED Wall Panel		1500 x 2800mm LED Wall Panel	
	Standard	Plus (Additional Lumen)	Human Centric (Tuneable White)	Standard	Plus (Additional Lumen)	Human Centric (Tuneable White)	Standard	Human Centric (Tuneable White)	Standard	Human Centric (Tuneable White)	Standard	Human Centric (Tuneable White)
Product Code	LW60120	LW60120P	LW60120H	LW120120	LW120120P	LW120120H	LW120180	LW120180H	LW120240	LW120240H	LW150280	LW150280H
Exact Dimensions (L x W x D)	592 x 1192 x 51.2mm	592 x 1192 x 51.2mm	592 x 1192 x 51.2mm	1192 x 1192 x 51.2mm	1192 x 1192 x 51.2mm	1192 x 1192 x 51.2mm	1192 x 1792 x 51.2mm	1192 x 1792 x 51.2mm	1192 x 2392 x 51.2mm	1192 x 2392 x 51.2mm	1492 x 2792 x 51.2mm	1492 x 2792 x 51.2mm
Light Source	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED	CREE SMD LED
Colour Temperature	6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin	6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin	6500 kelvin	From 2700 to 6500 kelvin
MacAdam	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step	3 step
CRI:	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90	>90
UGR:	<13	<13	<13	<13	<13	<13	<13	<13	<13	<13	<13	<13
Opening angle	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees	90 Degrees
Input voltage	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz	AC220~240V 50/60 Hz
Power Consumption	25 watt	50 watt	40 watt	50 watt	100 watt	80 watt	75 watt	80 watt	100 watt	120 watt	125 watt	140 watt
Lumen Output	1690 lumen	3380 lumen	2704 lumen	3380 lumen	6760 lumen	5408 lumen	5070 lumen	5408 lumen	6760 lumen	8100 lumen	8450 lumen	9464 lumen
LED Current	1040 mA (24V)	2080 mA (24V)	1666 mA (24V)	2080 mA (24V)	4020 mA (24V)	3200 mA (24V)	3125 mA (24V)	3200 mA (24V)	4020 mA (24V)	5000 mA (24V)	5200 mA (24V)	5830 mA (24V)
Lifespan L70@Ta 25C:	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs	>50,000 hrs
Working Temperature	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C	-20 / 40 °C
Storage Temperature	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C	-30 / 60 °C
IP Rating	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III	IP 20 class III
Connection	1nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	2nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector	4nr 1400mm Flying-lead c/w DC Connector
LED Driver	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.	Multi-lead DC connection. Type dependent on qty of combined panels.
Frame Material	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium	Powder-coated Aluminium
Frame Colour	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)	White (Custom available)
Dimming	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).	Optional (0-10v, DALI, Switch Dim & more).
Weight	12 Kg	12 Kg	12 Kg	24 Kg	24 Kg	24 Kg	36 kg	36 kg	48 kg	48 kg	70 kg	70 kg
Graphic Print	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection	Pigmented ink c/w UV protection
Image	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom	Choose from library or custom
Fire Rating	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified	TP(a) Certified
Independent Safety Cables	Steel (4nr)	Steel (4nr)	Steel (4nr)	Steel (4nr)	Steel (2nr)	Steel (4nr)	Steel (4nr)	Steel (4nr)	Steel (4nr)	Steel (4nr)	Steel (4nr)	Steel (4nr)
Standard Warranty	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years	2 Years

Detailed technical specifications are available for download from the “Technical Resources” section on [www.aspireinside.com](http://www.aspireinside.com)



# CONTROL IT YOUR WAY



## On/Off

Provided as standard. Keep things simple and connect to your existing functional lighting or a separate switch of your choice. Switches can be provided as an extra.



## Dimmable

Adjust the light output to suit your preferences. Our LED Drivers can be supplied to suit any dimming protocol (DALI, 0-10v etc.) allowing you to use your own switch of choice.

Switches can be provided as an extra.



## Human Centric & Dimmable

This advanced control option incorporates tunable white LED's with a temperature range from a warm 2700K to a cool 6500K.

Human centric lighting allows us to simulate the daily light cycle of dawn to dusk that regulates our bodies circadian rhythm, bringing about positive effects on our comfort, health, and general well-being.



## Manual

This option is supplied with a manual wall control that allows the end user to set their preferred colour temperature and lighting level.

## Automatic

Here, an automatic control function changes the lighting colour temperature based on pre-set times of day. A manual over-ride wall switch controlling the on/off function as well as dimming can also be provided.



2700K (Warm white)



6500K (Cool white)







Past Project  
**Healthcare**

**NHS**

**Children's ED Waiting Area**  
Bedford Hospital

“Everyone is amazed by the ceiling and how it improves the overall environment.”

**Dr Robert Oakley OBE**  
Vice-Chairman

ENHANCING PATIENT EXPERIENCE



[aspireinside.com](http://aspireinside.com)



Past Project  
**Healthcare**

Cromwell  
Hospital

**Paediatric Anaesthesia Suite**  
Cromwell Hospital, London

“Wow, what a difference they make!”

The lights are a fantastic distraction tool enabling all Staff Members to interact with the Child / Young Person providing opportunity for conversation, games and fun.”

**Sara Smith**  
Play Specialist

**ASPIRE**





Past Project  
**Healthcare**

**NHS**

**Macmillan Cancer Care Unit**  
Ulster Hospital, Dundonald

“We know that the environments in which people are treated are vital to their dignity and wellbeing, and can have a significant impact on the way they feel and respond to treatment.”

**Janice Preston**  
Head of Partnerships for Macmillan in Northern Ireland

ENHANCING PATIENT EXPERIENCE



aspireinside.com

Past Project  
**Healthcare**



**Dental Surgery**  
Happy Teeth, Dublin

“We are receiving excellent feedback in our Paediatric Practice. They are a great distraction & talking point for the kids”.

**Dr. Abigail Moore**  
Dentist

**ASPIRE**



Past Project  
**Workplace**



**Meeting Room**

The Institute of Cancer Research, London

“Installation of the LED sky panels introduced a more vibrant feel within our basement meeting spaces. Many users have shared their appreciation of the improvements to light, colour and visual comfort at meetings”.

**David Wratten**

Head of Planning and Development



aspireinside.com

ENHANCING PATIENT EXPERIENCE

Past Project  
**Education**




**Science Classroom**

The Forrest School, West Sussex

“We have been absolutely delighted with our new LED SKY ceilings in both of our refurbished Science laboratories. It has made such a difference to the rooms for the students and teachers. Inspirational!”

**Caroline Dedman**

Business Manager

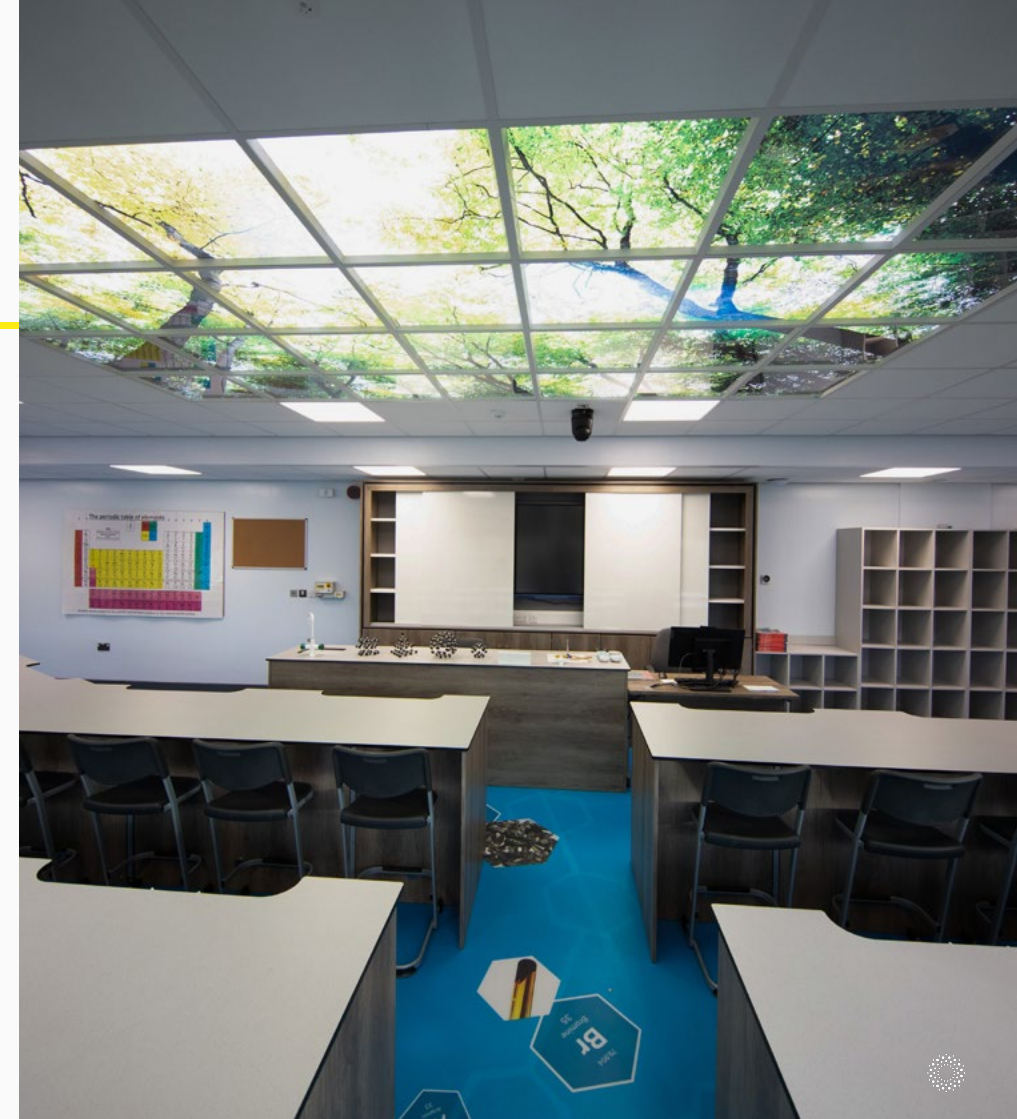

**ASPIRE**



# SEE THE TRANSFORMATION

Send us images of your space/s to receive a before & after visual showcasing what's possible.



Office 1, ITEC Business Park,  
53 Armagh Rd, Newry  
BT35 6DN, N. Ireland

+44(0)20 3011 0759  
sales@aspireinside.com

aspireinside.com



## PRODUCT **BROCHURE**

LED Sky Ceilings &  
LED Wall Panels

ENHANCING  
PATIENT  
EXPERIENCE

