

GKT19

50W/100W

LED STRING LIGHT



Anti-impact



IP65



Recycle



Injection molding cord,
strong tensile strength,
Cord: 18/2 SJTW



smaller size, only 1/2 of the
conventional luminaire



Linkable units

T19-50W


5 lamps one set



50W Maximum link 6 sets

T19-100W


10 lamps one set

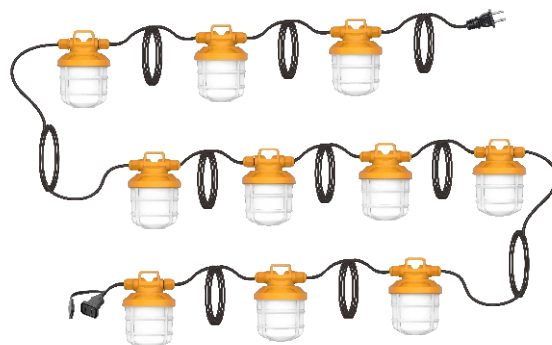

100W Maximum link 3 sets

Dimensions


5 lamps one set (Standard)		L=50ft (15m)	
10 lamps one set (Standard)		L=100ft (30m)	
15 lamps one set	L=150ft (46m)	25 lamps one set	L=250ft (76m)
20 lamps one set	L=200ft (61m)	30 lamps one set	L=300ft (91m)

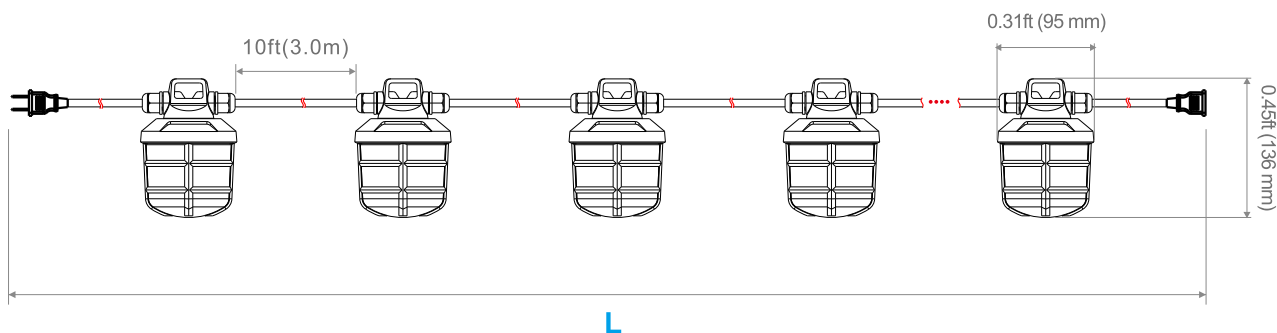


Specifications

Power	LED Qty	PF	CRI	Voltage	CCT	Lumen	Size mm (x0.0393=inch)	Operation temp (°C / °F)	Beamangle	Weight kg (lbs=kgx2.2)	IP degree	Equal to
50W±10%	28*5 leds 2835	≥0.9	≥80	120VAC 60Hz	2700-6000K	1200*5±10%	Φ95*135 Φ3.7"*5.31"	-30~45°C -22~113°F	360°	NW: 1.8kg GW: 2.3kg	IP65	40W*5 Incandescent bulb
100W±10%	28*10 leds 2835	≥0.9	≥80	120VAC 60Hz	2700-6000K	1200*10±10%	Φ95*135 Φ3.7"*5.31"	-30~45°C -22~113°F	360°	NW: 3.6kg GW: 4.6kg	IP65	40W*10 Incandescent bulb

Replace



Replace



Features

Hanging wire hole


Waterproof joint

PC housing

PC mikly cover

TPE Soft rubber shield

NO.1

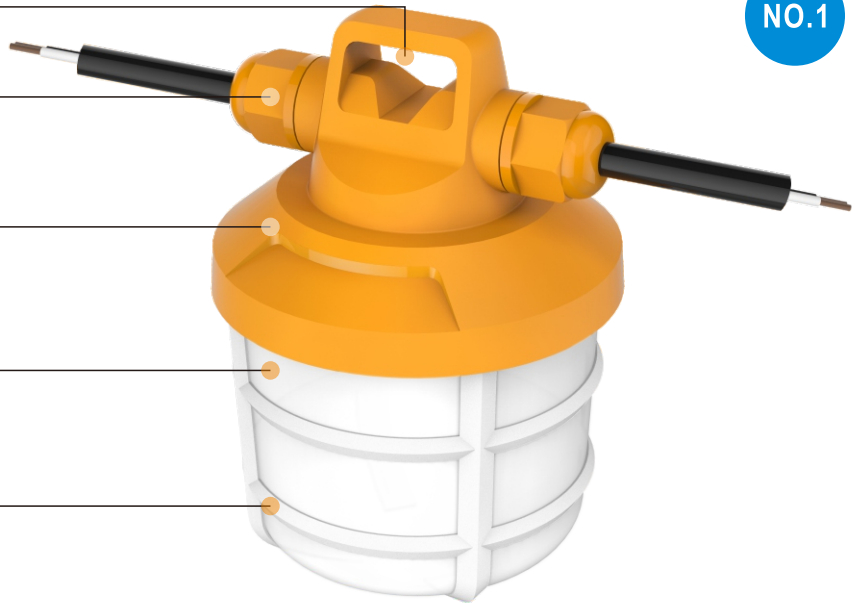


NO.2



Better shatter-resistant,
designed with soft rubber
to wrap lampshade.



NO.3

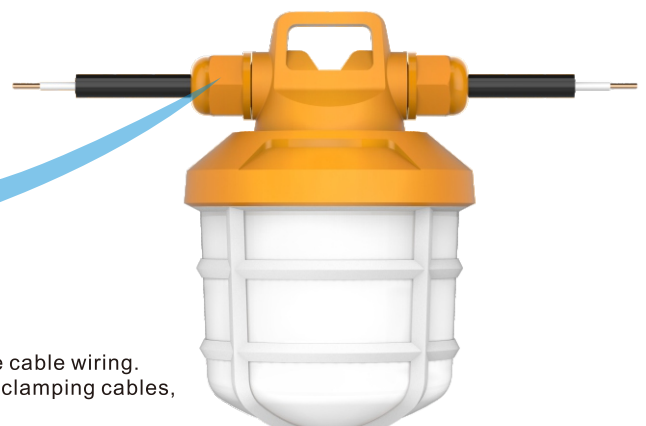


1. Highly sealed waterproof joints to ensure waterproof and safe cable wiring.
2. High toughness clamping jaws, designed with a wide range of clamping cables, effective tensile strength, strong waterproof and dustproof

Application



Packing

Wattes	Carton Size	G W	Quantity Per Carton
10W*5	320*257*178mm	2.3kg	5
10W*10	525*257*178mm	4.6kg	10

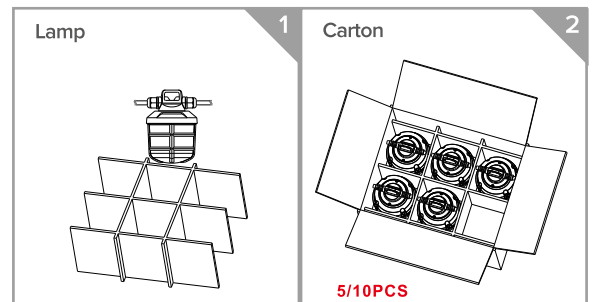

⚠ CAUTIONS

- Risk of electric shock.
- The temporary lighting are non-dimmable.
- Input Voltage: 120V
- Don't take apart the lamps without our permit.
- Please read the instruction manual carefully before installation.

