

LED Linear High Bays

HBL-04-G3(C2)



Better solutions for a Led Linear Highbays



Ip65 water-proof



AC100-277V 50/60Hz



Easy Installation



130Lm/w

Operating Temp.: -40°C ~+50°C

Storage Temp.: -40°C ~+80°C

Options

Power

SOSEN DRIVER

Color

3000K
4000K
5000K
5700K




Application

Factories, Steel Mills, Steel Smelting Plants, Farms, sport Facilities & Workshops, Storage Facilities & Warehouses, Supermarkets & Department Stores, Showrooms, Design Centers & Galleries.


Specifications

Item	Power	Luminous Efficacy	Leds	CRI	Weight	Beam Angle
HBL80W-04-G3	80W	130lm/W	SMD 2835	> 80	3.00kg	60°*100°
HBL100W-04-G3	100W	130lm/W	SMD 2835	> 80	3.00kg	60°*100°
HBL150W-04-G3	150W	130lm/W	SMD 2835	> 80	4.90kg	60°*100°
HBL200W-04-G3	200W	130lm/W	SMD 2835	> 80	4.90kg	60°*100°
HBL300W-04-G3	300W	130lm/W	SMD 2835	> 80	8.00kg	60°*100°

Dimensions(mm)

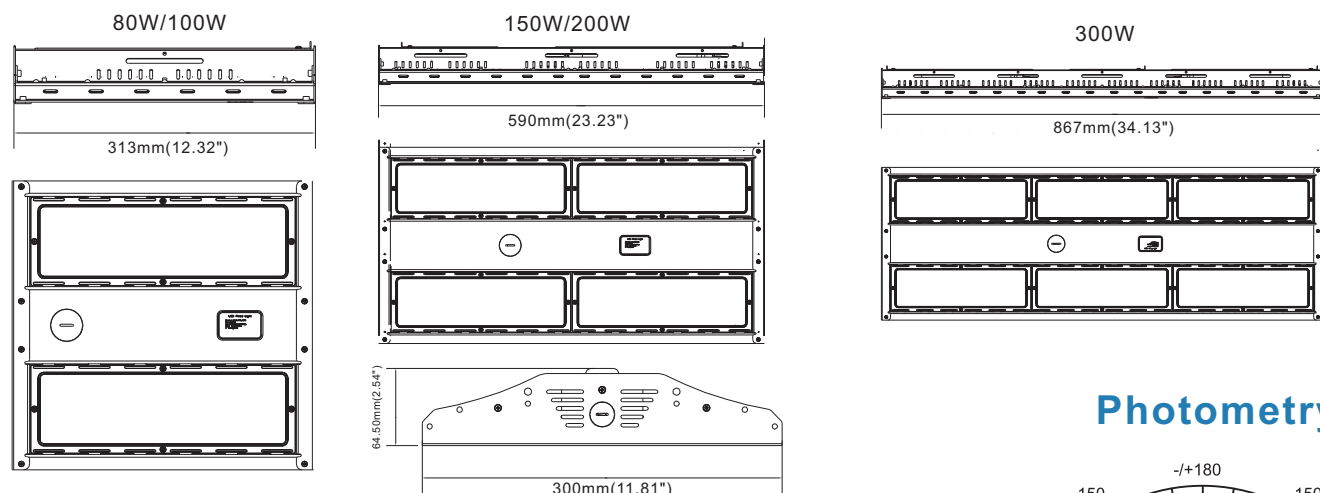

Photometry

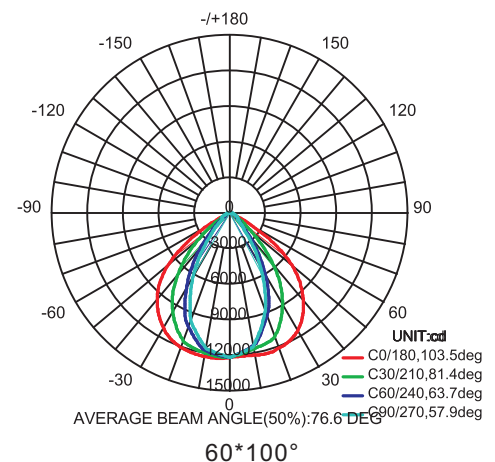

HBL-04-G3(C2)

LED Linear High Bays

Model Options



P1 Hanging Installation (Standard)




P2 Ceiling Installation




P3 Hanging Installation

Installation and use


P1 Hanging Installation (Standard)

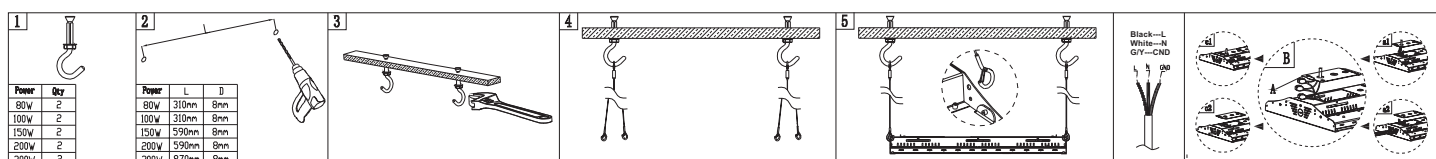

P2 Ceiling Installation

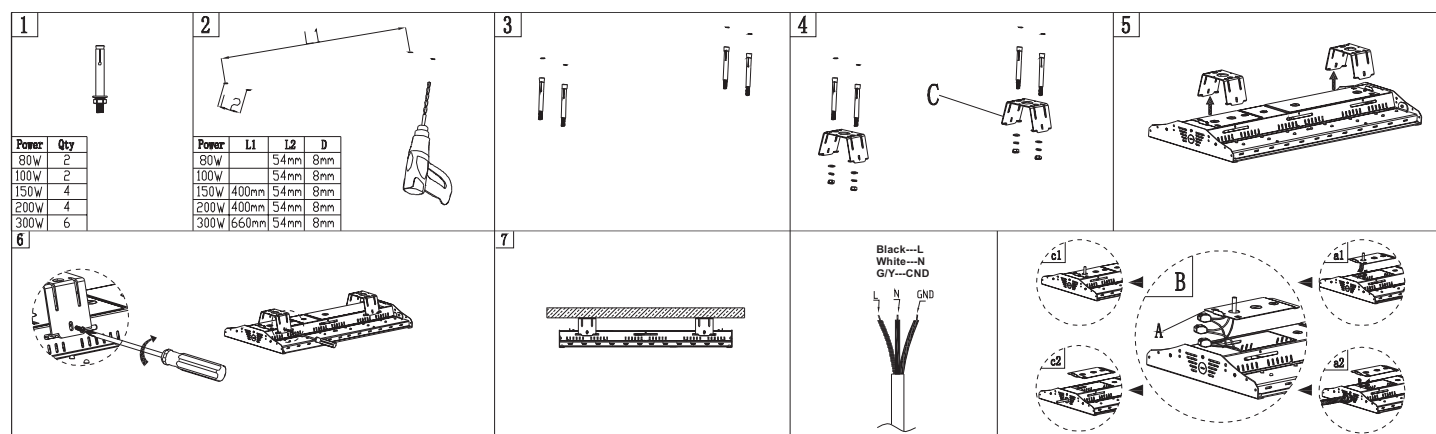

P3 Pole installation

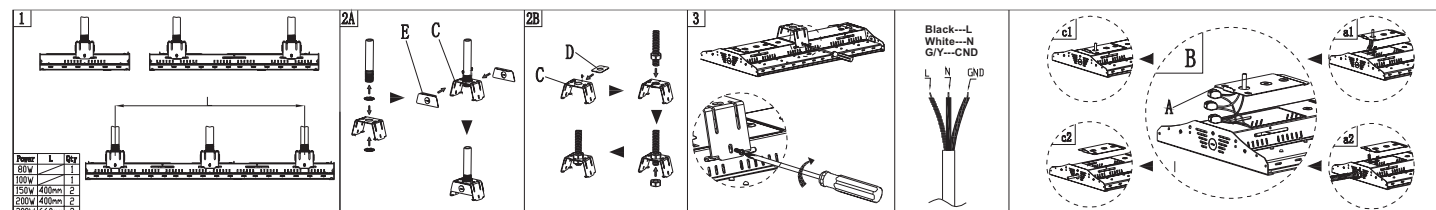

Sensor Optional



Packing Spec

Item	Box			Carton		
	Measurement(mm)	Gross weight	Pcs/box	Measurement(mm)	Gross weight	Pcs/box
HBL80W/100W-04-G3	L378*W368*H138	3.2kg	1	/	/	/
HBL150W/200W-04-G3	L658*W368*H138	5.3kg	1	/	/	/
HBL300W-04-G3	L935*W368*H138	8.7kg	1	/	/	/