

LED Linear Highbay Light



Product Description

Linear Highbay Use Best Die-Casting Aluminum housing, Anti-Corrosion Painting Design. High-Performance Replace 300-1000W MH/HPS.


Advantage

- UL DLC Certified.
- Input Voltage 120-277VAC.
- No UV or IR in the beam.
- Easy Install and Maintenance.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, No flickering, No Harm.
- Green and Eco-friendly without mercury.
- Output constant current lever can be adjusted through output cable with 1-10V.

*The product can not be connected to a dimming device when it's equipped with Motion Sensor.



Type A



Type B



Type C



Type D

Applications

Warehouse, factory and workshops; Exhibition hall and supermarkets, etc






LED Linear Highbay Light

Specifications

Model No.	LS-LHBV2-110WBFP2C1-abd	LS-LHBV2-165WBFP2C1-abd	LS-LHBV2-220WBFP2C1-abd
Input Power	110W	165W	220W
Lumen	14300-15000LM	21600-22800LM	28200-29700LM
Lumen Efficacy	136-142LM/W	135-142LM/W	133-140LM/W
Color Temperature	4000K, 4500K, 5000K, 5700K		
CRI	>80		
Viewing Angle	100 Degree		
Input Voltage	120-277VAC 50/60Hz		
PF	≥0.9		
THD	≤20%		
Driver Brand	China brand driver		
Optional Accessory	Motion Sensor, PIR Sensor		
LED Brand	Lumileds		
LED Type	SMD2835 (0.5W)		
LED QTY	330 PCS	504 PCS	660 PCS
Housing	Aluminum Alloy		
Housing Color	White		
Waterproof Rating	DAMP		
Operating Temperature	-40℃ TO 45℃		
Operating Humidity	20%-90% RH		
Storage Temperature	-40℃ TO 80℃		
Storage Humidity	10%-95% RH		
Warranty Time	5 Years		
Option Note	a= Housing colors, WH=White, b=Sensor, MS or PS or Blank (Motion Sensor or PIR Sensor) d= CCT, 40=4000K, 45=4500K, 50=5000K, 57=5700K		

LED Linear Highbay Light

Photometrics

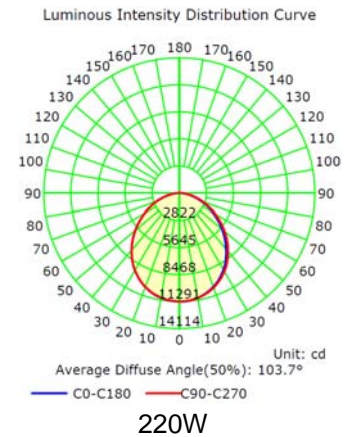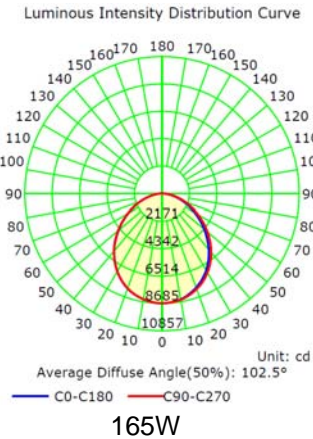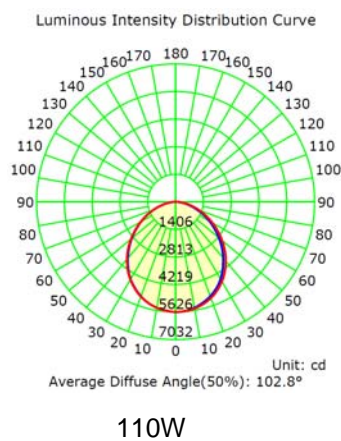


Projected LED Lumen Maintenance

Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the Linear Highbay LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Dimensions

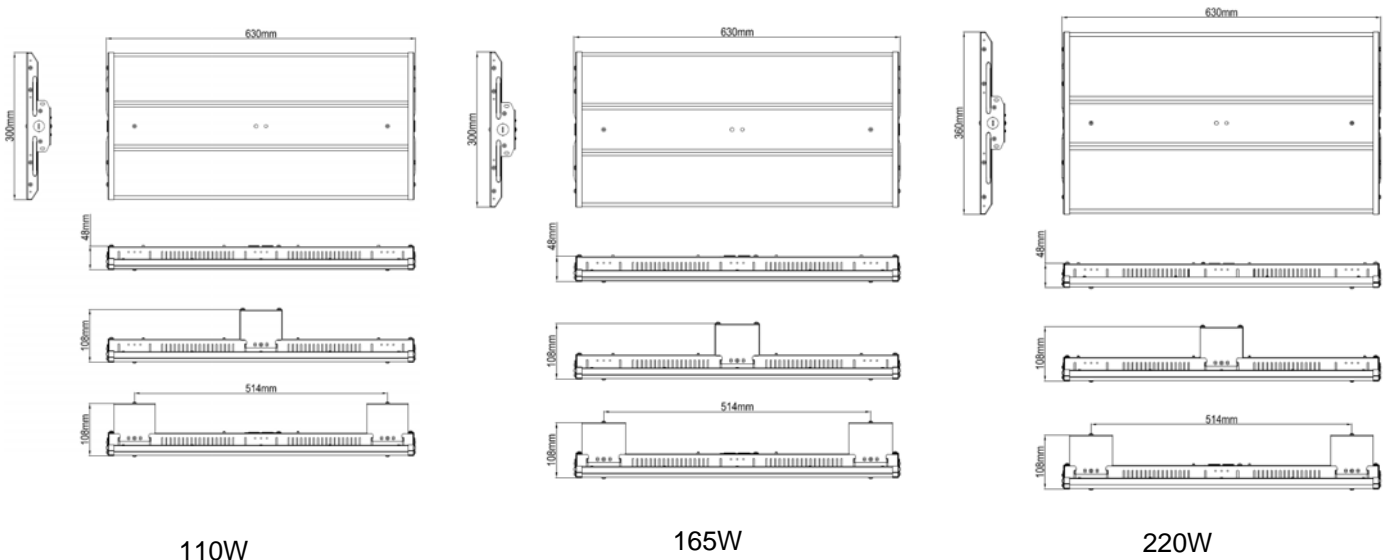

Notice for User

Please turn off power before install or change assembly parts.
The input voltage and lamps should be matched, after connecting the power line,
Please make sure the wiring section is insulated.
No-professionals, must not install and disassemble the lamps.

LED Linear Highbay Light

Product Description

Linear Highbay use best die-casting aluminum housing, anti-corrosion painting design. High-performance Replace 800-1000W MH/HPS.


Advantage

- UL certificate.
- Input voltage 120-277VAC.
- No UV or IR in the beam.
- Easy to install and operate.
- Energy saving, long lifespan.
- Light is soft and uniform, safe to eyes.
- Instant start, NO flickering, NO humming.
- Green and eco-friendly without mercury.
- Output constant current lever can be adjusted through output cable with 1-10V.

*The product can not be connected to a dimming device when it's equipped with Motion Sensor.



Type A



Type B



Type C



Type D

Applications

Warehouse, factory and workshops; Exhibition hall and supermarkets, etc




LED Linear Highbay Light

Specifications


Model No.	LS-LHBV2-300WBFP2C1-abd
Input Power	300W
Lumen	40000-43000LM
Lumen Efficacy	135-143LM/W
Color Temperature	4000K, 4500K, 5000K, 5700K
CRI	>80
Viewing Angle	100 Degree
Input Voltage	120-277VAC 50/60Hz
PF	≥0.9
THD	≤20%
Driver Brand	China brand driver
Optional Accessory	Motion Sensor, PIR Sensor
LED Brand	Lumileds
LED Type	SMD2835 (0.5W)
LED QTY	960 PCS
Housing	Aluminum Alloy
Housing Color	White
Waterproof Rating	DAMP
Operating Temperature	-40℃ TO 45℃
Operating Humidity	20%-90% RH
Storage Temperature	-40℃ TO 80℃
Storage Humidity	10%-95% RH
Warranty Time	5 Years
Option Note	a= Housing colors, WH=White, b=Sensor, MS or PS or Blank (Motion Sensor or PIR Sensor) d= CCT, 40=4000K, 45=4500K, 50=5000K, 57=5700K

LED Linear Highbay Light

Photometrics

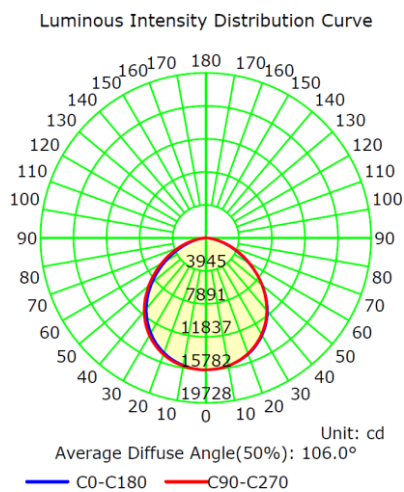

The Average Illuminance Effective Figure

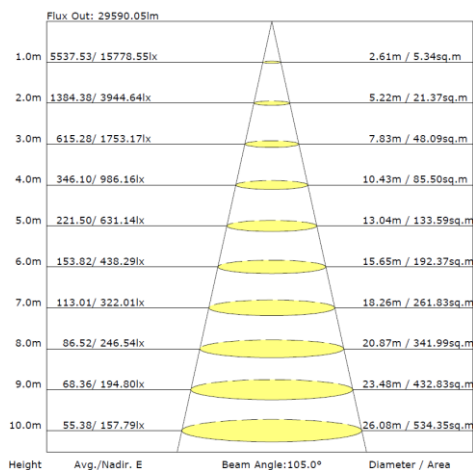

Projected LED Lumen Maintenance

Operating hours	0	25000	50000
Lumen maintenance factor	1	0.91	0.8

Data references the extrapolated performance projections for the Linear Highbay LED platform in a 25°C ambient, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

Dimensions

