

YPC-150AZ

15-inch fanless tablet computer
Intel® Core 7th/10th/12th/J6412/N97 processor



Product Features ›


- Industrial-grade 15-inch LCD display
- Projected capacitive touch screen, 10-point touch
- Intel® Core 7th/10th/12th/J6412/N97 processor
- Dual Gigabit Ethernet ports, support network wake-up, PXE function
- 6*COM, COM1/COM2 support RS232/RS485 Optional
- 4*USB3.0, 2*USB2.0
- 8*GPIO (Provides digital input and output)
- 1* Power-on automatic start switch (manual toggle)
- 1*CMOS Clear Button (to clear BIOS settings and restore to factory defaults)
- DC12V input, optional DC9-36V wide voltage input, supports power-on
- Support win10/win11/Linux system
- Compact fanless design, with sturdy aluminum alloy shell and IP65-level front panel

Product Parameters›

model	YPC-150AZ				
system	CPU	Intel® Core 7 th Generation i3/i5/i7	Intel® Core 10 th Generation i3/i5/i7	Intel® Core 12 th Generation i3/i5/i7	Intel® Celeron J6412/ Intel® Alder Lake_ N97
	Memory	1*SODIMM memory slot, supports DDR3L/DDR3, maximum support 32GB	2*SODIMM memory slots, support DDR4 dual-channel memory, maximum support 64GB	2*SODIMM memory slots, support DDR4 dual-channel memory, maximum support 64GB	1*SODIMM memory slot, supports DDR4, maximum support 32GB
	storage	1* M.2 2280 Key-M slot (supports SATA SSD and NVME SSD adaptive) 1*SATA (supports 2.5-inch hard disk)	1* M.2 2280 Key-M slot (supports SATA SSD and NVME SSD adaptive) 1*SATA (supports 2.5-inch hard disk)	1* M.2 2280 Key-M slot (supports SATA SSD, customizable NVME SSD) 1*SATA (supports 2.5-inch hard disk)	1* M.2 2280 Key-M slot (supports SATA SSD) 1*SATA (supports 2.5-inch hard disk)
	Network (LAN)	2 *RTL8111H Gigabit electrical ports, support network wake-up/PXE			
	I/O Interface	1*power switch 1 * power indicator, 1 * hard disk indicator 1*HDMI 4*USB3.0, 2*USB2.0 2*LAN 6 * COM (COM1/COM2 optional RS232/RS485, COM3-COM6 RS232) 8*GPIO (providing digital input and output) + SW (start button external interface) 1*audio two-in-one interface 1*Power-on automatic start switch (manual toggle) 1*CMOS Clear button (can clear BIOS settings and restore to factory default state) 1* 2pin Phoenix terminal, supports 12V voltage input, optional 9-36V wide voltage input			
	Extensions	1*M.2 2230 Key-E slot, supports WIFI/BT module 1*Mini-PCIE slot, supports WIFI / 4G module			
	Watchdog	255 levels of programmable seconds/minutes, supporting timeout interrupt or system reset			


	speaker	2*8Ω 2w
operating system	operating system	Microsoft® Windows10 , Win dows 11 , Linux
LCD screen	type	15-inch industrial-grade LCD display (LED backlight)
	Resolution	1024 * 768
	Viewing angle	89/89/89/89 (Typ.)(CR≥10)
	brightness	450nits
	Contrast	1000:1
	Backlight life	30000hr (min.)
touchscreen	type	Projected capacitive touch , 10-point touch
	Control method	USB interface
	Light transmittance	More than 80%
environment	Operating	-5 °C ~ 60 °C
	Storage	-20 °C ~ 75 °C
	relative	5%-95% relative humidity, non-condensing
body	Weight (bare	TBD
	Install	Support VESA installation/embedded panel installation

Dimensional Drawing >

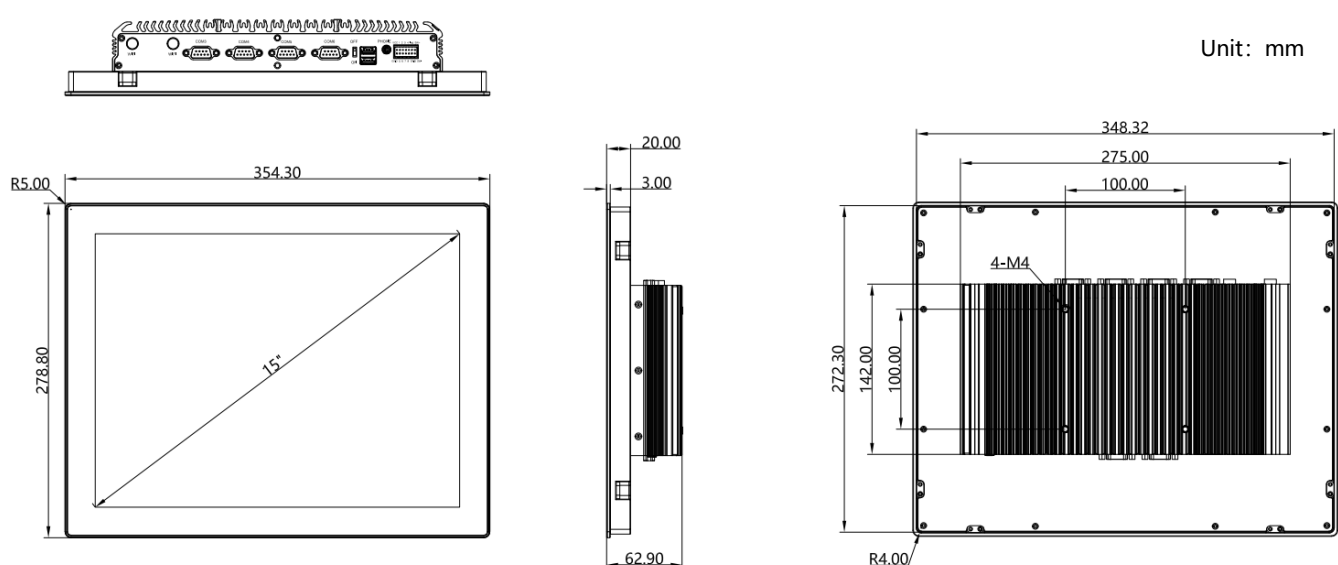

Panel opening size: 349.70*274.20mm

I/O View >

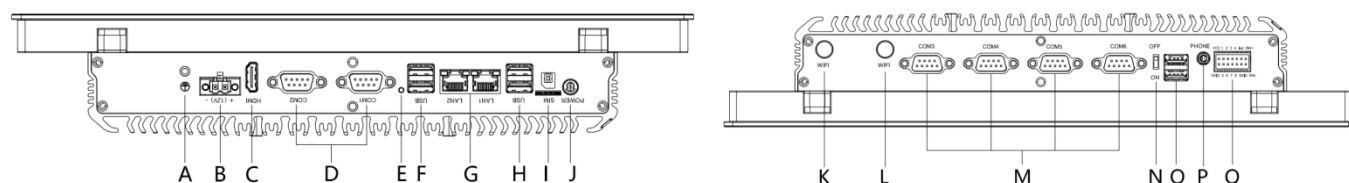

A. GND
B. DC 12V (9-36V optional)
C. HDMI
D. COM1/COM2
E. CMOS Clear button

F. 2*USB3.0
G. 2*LAN
H. 2*USB3.0
I. SIM card holder
J. Pushbutton switch

K. WIFI
L. WIFI
M. COM3-COM6
N. Power-on automatic
O. 2*USB2.0

P. PHONE
Q. GPIO + SW

Ordering Information ›

No.	Model	Version	CPU	Memory	LAN	COM	HDMI	USB 3.0	USB 2.0	POWER
1	YPC-150AZ	7th generation	7th generation i3/i5/i7	1 *SO - DIMM	2 *8111H	6	1	4	2	12V (9-36V optional)
2	YPC-150AZ	10th generation	10th generation i3/i5/i7	2 *SO - DIMM	2 *8111H	6	1	4	2	12V (9-36V optional)
3	YPC-150AZ	12th generation	12th generation i3/i5/i7	2 *SO - DIMM	2 *8111H	6	1	4	2	12V (9-36V optional)
4	YPC-150AZ	J6412	J6412	1 *SO - DIMM	2 *8111H	6	1	4	2	12V (9-36V optional)
5	YPC-150AZ	N97	N97	1 *SO - DIMM	2 *8111H	6	1	4	2	12V (9-36V optional)