



FAIL IN PLACE EXPLOSION PROOF ELECTRIC ACTUATOR

Features:

- Quarter turn operation (See specs below for models capable of 360-degree rotation. 360-degree models would be the VZTF series).
- Heavy duty motor with thermal overload protection.
- Rugged IP68/NEMA 4X aluminum alloy housing.
- C3 level corrosion resistance with powder coated, 1000 hours of salt spray.
- CSA CLS 1 DIV 1 GRP C and D, T5
- Over Torque Protection Switch.
- Standard ISO5211 direct installation.
- Manual override with handwheel.
- Installation at any angle.
- Heater for eliminating condensation.
- Fail in Place on Loss of power or Fail Safe on loss of 4-20ma signal.
- Self-locking high strength gear train to keep last known position. High Speed models are not self-locking except for VZT-2655-10.



Description

VZT fail in place electric series actuators are available in 12VDC, 24VDC, 120VAC or 220VAC. When power is lost to the actuator, it will fail in place. The 24VDC, 120VAC and 220VAC are available in modulating or on/off service. 12VDC models are on/off service and not modulating.

Specifications


Standard Speed Type	VZT-442-20	VZT-885-15	VZT-1770-15	VZT-3540-30
Output Torque in-lbs.	442	885	1,770	3,540
No Load Stroke Time sec	20	15	15	22
Full load Stroke Time sec	30	30	30	30
Rotation Angle	0-110° or 0-360°	0-110°	0-110°	0-110°
Motor Watts	10	40	40	90
Power	12VDC, 24VDC, 120VAC or 220VAC			
Rated Current – amps@24VDC	1.5	2.2	3.1	7.8
Total Weight	6.6 lbs.	11 lbs.	12.1 lbs.	20.9 lbs.
Control Type	On/Off or 4-20 Modulating (12V are On/off only)			
Output Singal	On/Off has Dry Contacts, Modulating has Dry Contacts and 4-20ma			
On/Off Dry Contact Rating	15 amps			
Basic Error/Reciprocating Error	not more than $\pm 1\%$ (Modulating Unit)			
Dead Space	0.5%-5.0% adjustable (Modulating Unit)			
Repeating Error in Actuator	$\leq 1\%$ (Modulating Unit)			
Insulating Resistance	100M Ω /500VDC (Modulating Unit)			
Withstand Voltage Class	1500VAC 1 minute (Modulating Unit)			
Electric Interface	2 x 1/2" NPT			
Ambient Temperature	-25°C ~+55°C			

Standard Speed Type	VZT-5310-45	VZT-8850-50	VZT-13276-60	VZT-26550-140
Output Torque in-lbs.	5,310	8,850	13,276	26,550
No Load Stroke Time sec DC	26	39	48	136
Full load Stroke Time sec DC	45	50	60	170
Rotation Angle	0-110°	0-110° or 0-360°	0-110°	0-110° or 0-360°
Motor Watts DC	90	113	113	113
Power	12VDC, 24VDC, 120VAC or 220VAC			
Rated Current – amps@24VDC	8.0	2.2	6.1	7.5
Total Weight	22 lbs.	32 lbs.	46 lbs.	47 lbs.
Control Type	On/Off or 4-20 Modulating (12V are On/off only)			
Output Singal	On/Off has Dry Contacts, Modulating has Dry Contacts and 4-20ma			
On/Off Dry Contact Rating	15 amps			
Basic Error/Reciprocating Error	not more than $\pm 1\%$ (Modulating Unit)			
Dead Space	0.5%-5.0% adjustable (Modulating Unit)			
Repeating Error in Actuator	$\leq 1\%$ (Modulating Unit)			
Insulating Resistance	100M Ω /500VDC (Modulating Unit)			
Withstand Voltage Class	1500VAC 1minute (Modulating Unit)			
Electric Interface	2 x 1/2" NPT			
Ambient Temperature	-25°C~+55°C			



FAST SPEED Type	VZT-442-5	VZT-1770-5	VZT-2655-10	VZT-5310-13
Output Torque in-lbs.	442	1,770	2,655	5,310
No Load Stroke Time sec DC/AC	2.2@90 deg	4.7 @90 deg	9@90 deg	13@90 deg
Full load Stroke Time sec DC/AC	4 @90 deg	5 @90 deg	10 @90 deg	15@90 deg
Rotation Angle	0-110°	0-110°	0-110°	0-110° or 0-360°
Motor Watts DC/AC	30	90	90	113
Power	24VDC, 120VAC or 220VAC (12VDC is NOT available in Fast speed)			
Rated Current – amps@24VDC	0.8	8.0	7.8	6.8
Total Weight	12	22	30	32
Control Type	On/Off or 4-20 Modulating			
Output Singal	On/Off has Dry Contacts, Modulating has Dry Contacts and 4-20ma			
On/Off Dry Contact Rating	15 amps			
Insulating Resistance	100M Ω /500VDC (Modulating Unit)			
Withstand Voltage Class	1500VAC 1minute (Modulating Unit)			
Electric Interface	2 x 1/2" NPT			
Ambient Temperature	-25°C~+55°C			

[Type here]


VZT-442 STANDARD SPEED - Dimensions are inches



Standard Type

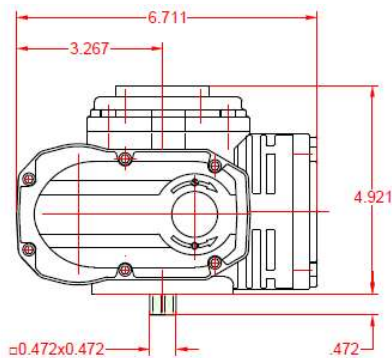


Direct Installation Type




Parameters for direct installation	
Square	±0.354x0.354±0.433x0.433±0.551x0.551
Flange	F03 F05 F07
Valve stem	Height≤0.669



Bolt Conversion		
Metric	Imperial	
	UNF	UNC
M5	10-32	10-24
M6	1/4-28	1/4-20
M8	5/16-24	5/16-18

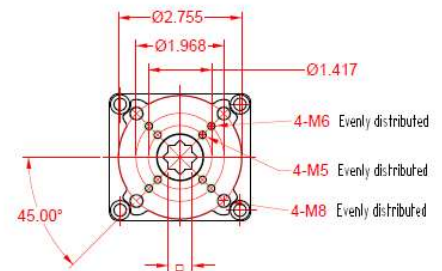


VT-885 AND VZT-1770 STANDARD - Dimensions are inches



Standard Type

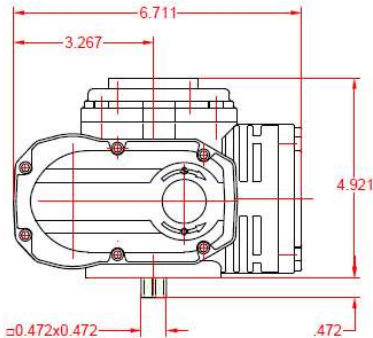


Direct Installation Type




Parameters for direct installation	
Square	±0.354x0.354±0.433x0.433±0.551x0.551
Flange	F03 F05 F07
Valve stem	Height≤0.669

Bolt Conversion		
Metric	Imperial	
	UNF	UNC
M5	10-32	10-24
M6	1/4-28	1/4-20
M8	5/16-24	5/16-18

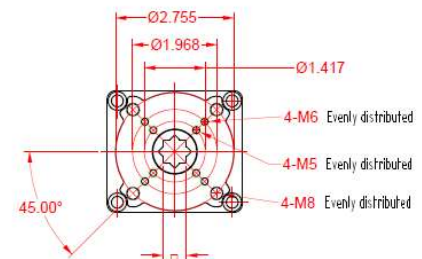


[Type here]


VT-3540 AND VZT-5310 STANDARD SPEED & VZT-1770 FAST SPEED - Dimensions are inches

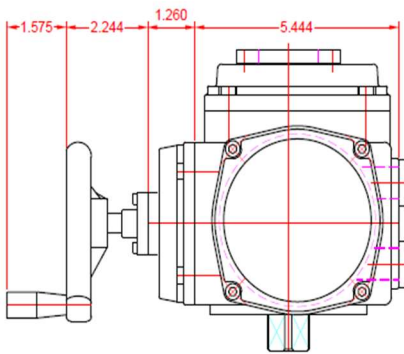

Standard Type

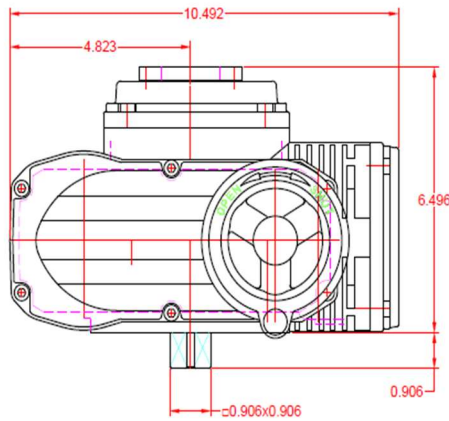


Direct Installation Type

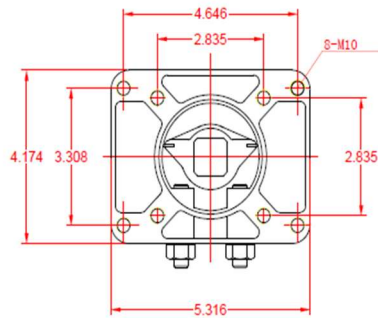

Parameters for direct installation	
Square	$\square 0.669 \times 0.669 \square 0.866 \times 0.866$
Flange	F07 F10
Valve stem	Height ≤ 0.984


Bolt Conversion		
Metric	UNF	UNC
M8	5/16-24	5/16-18
M10	3/8-24	3/8-16

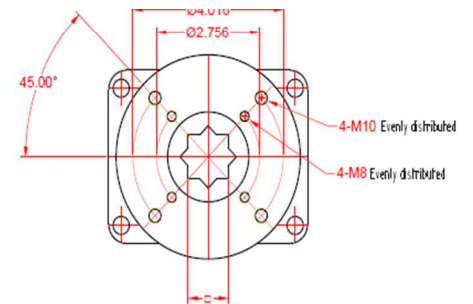


VT-8850 VZT-13276 VZT-26550 STANDARD SPEED AND FAST SPEED VZT-2655 VZT-5310 - Dimensions are inches

VZT-8850

VZT-13275, VZT-26550, & FAST SPEED VZT-5310

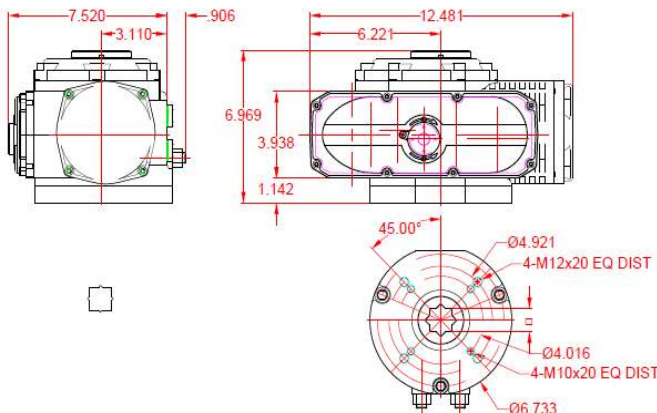

	VZT-8850	VZT-13275/26550
Square	$\square 0.866 \times 0.866$ $\square 1.063 \times 1.063$	$\square 1.063 \times 1.063$ $\square 1.417 \times 1.417$
Flange	F10 F12	F14 F16
Valve Stem	Length ≤ 2.598	Length ≤ 2.598

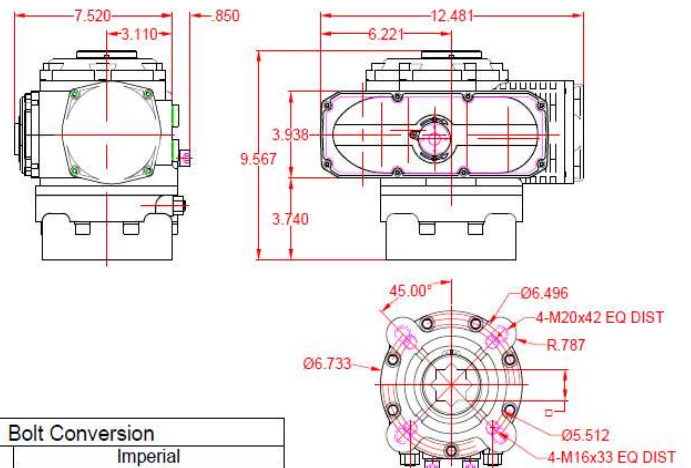

Bolt Conversion		
Metric	UNF	UNC
M10	3/8-24	3/8-16
M12	7/16-20	7/16-14
M16	5/8-18	5/8-11
M20	3/4-16	3/4-10

[Type here]

FOR INQUIRES EMAIL VanZandt Controls.

RFQCanyon@vzcontrols.com

RFQFortWorth@vzcontrols.com

RFQRifle@vzcontrols.com

RFQLongview@vzcontrols.com

RFQFarmington@vzcontrols.com

RFQOdessa@vzcontrols.com

RFQHouston@vzcontrols.com

RFQHobbs@vzcontrols.com

RFQTulsa@vzcontrols.com

RFQSanAntonio@vzcontrols.com

RFQCarlsbad@vzcontrols.com

RFQGreeley@vzcontrols.com

OR Call VanZandt Controls:

Ft Worth TX-888-649-4283	Farmington NM-505-334-4343	Odessa Tx-432-242-8000	Tulsa OK-918-216-1058
Greeley CO-720345-0150	Longview TX-817-771-1636	Houston TX-832-821-7333	Hobbs NM-575-942-2671
Canyon TX-806-655-9367	SanAnton.TX-210-6930430	Carlsbad TX-575-717-0210	Rifle CO-970-625-1525

For online store: <https://www.shopvzcontrols.com/>