



FEATURES

- AC EMB series
- High Output Voltage
- Multiple wattages and mounting configurations
- Factory or Field Installable
- Rated for use in Plenum, Damp Location, enclosed and gasketed fixtures
- Compatible with dimmer and non-dimmer applications
- Integrated self-diagnostic circuitry for automatic test required by Life Safety Code
 - Monthly: 30-second test
 - Annually: 90-minute test
- Unit contains a battery charge and converter for individual fixture requirements




SPECIFICATIONS

Input Voltage	120-347V, 50/60 HZ
Input Power	12Watts (max.)
Output Voltage	170Vdc
EMI (Radiated and Conducted)	FCC Class A (charge and EM mode)
Input Current	200mA (max.)
Recharge Power	24 Hours
Emergency Power (Watts)	15, 25 and 40
Recharge Time	24 Hours
Surge Protection	Meets ANSI/IEEE C62.41.2-2002
Battery	Lithium
Operating Temperature	0-50°C (32-122°F)
Warranty	5-Year

PRODUCT DIMENSIONS

Flexible Conduit: 13" (330mm)

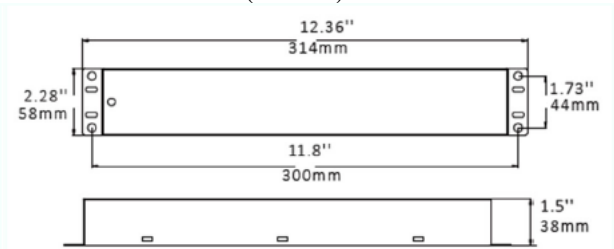

CERTIFICATION – COMPLIANCE – RATINGS

- UL924
- RoHS Compliant
- CEC Title 20



ORDERING INFORMATION

144-EMB-347-(WATTAGE)

HOW TO CHOOSE WATTAGE

FIXTURE DIMMING OPTION	WATTAGE	15W	25W	40W
Fixture does NOT have dimming function	0-15W	X	X	X
	15-24W		X	X
	25-40W			X
Fixture HAS a 0-10V dimming function	0-80W	X	X	X
	80-150W		X	X
	150-300W			X