



# LED 4FT WRAP AROUND LIGHT- MULTI WATTAGE SERIES 120



## FEATURES

Tunable Wattage  
Default CCT: 5,000K  
IP20 rated  
50,000 hours lifetime

## APPLICATIONS

*Limitless*  
Aisles  
Commercial Facilities  
Corridors  
Distribution Centers  
Hallways  
Restrooms  
Stairwells  
Storage Closets

## CONSTRUCTION

22-gauge metal housing with matte white finish. PMMA cover lens.

## ELECTRICAL

Available as 120-277V input. Operating temperature -4°F to 122°F (20°C to 50°C).

## OPTICAL SYSTEM

Samsung 2835 LED chips. Frosted lens. 110° beam angle.

## INSTALLATION AND MOUNTING

Suspension or surface mounting options.

## CONTROLS AND DIMMING

0-10V dimming comes standard. Optional emergency battery backup.

## CERTIFICATION AND WARRANTY

DLC Listed and UL Certified. 5-year limited warranty. Actual performance may differ as a result of end-user environment and application.



## ORDERING EXAMPLE: 120-WL4X-T48-50-27V

FORM FACTOR	WATTAGE (TUNABLE)	CCT	VOLTAGE
<b>120-WL4X</b>	32=32W 40=40W <b>48=48W</b>	<b>50=5000K</b>	<b>27V=120-277V</b>




LED 4FT WRAP AROUND LIGHT- MULTI WATTAGE SERIES 120

TECHNICAL PARAMETERS

FIXTURE	120-WL4X-T32-50-27V	120-WL4X-T40-50-27V	120-WL4X-T48-50-27V
Input Voltage (AC)	120-277V		
Rated Wattage	32W	40W	48W
Lumens (lm)	3,680lm	4,600lm	5,814.72lm
Efficacy (lm/W)	115lm/W	115lm/W	120.5lm/W
CRI	81.6		
CCT (Kelvin)	5000K		
Lifespan (Hours)	50,000		
Power Factor	.969		
THD	17.2%		
Dimming	0-10V Dimming		
IP20 Rating	Product is touchproof and will be resistant to dust or objects that are over 12mm in size.		
Operating Temperature	-4°F to 122°F (20°C to 50°C)		

PRODUCT DIMENSIONS

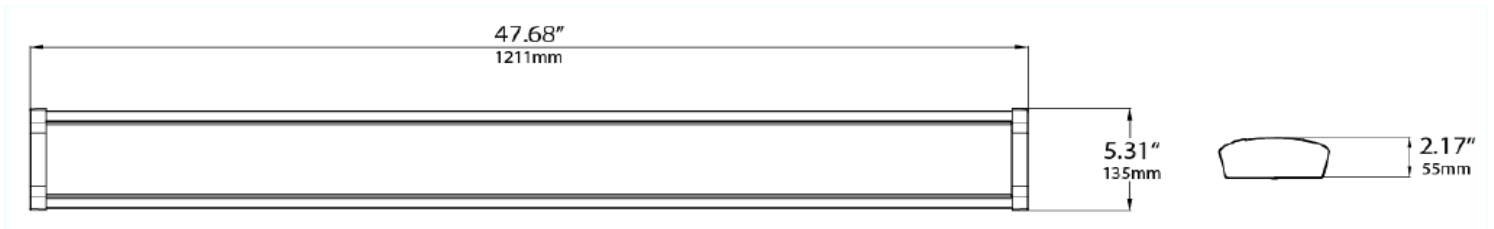

PHOTOMETRIC

