



LED LINEAR ARCHITECTURAL LINKABLE LUMINAIRE SERIES 065

FEATURES

Modern Architectural Design
Linkable sizes for creativity
Multiple lengths to choose from
Multiple CCT to choose from
Non-dimmable
50,000 hours lifespan

APPLICATIONS

Commercial Buildings
Convention Centers
Cultural Buildings
Hotels
Lobbies
Office Spaces
Retail Spaces
Showrooms



CONSTRUCTION

Aluminum housing and end cap in matte black finish.
Polycarbonate cover in frosted or clear lens.

ELECTRICAL

Available as 100-277V input and 220-240V. Operating temperature -4°F to 104°F (-20°C to 40°C).

OPTICAL SYSTEM

Choose a clear lens or a frosted lens.

INSTALLATION AND MOUNTING

Surface mount is standard with optional suspended mounting.

CONTROLS AND DIMMING


Non-dimming fixture.

CERTIFICATION AND WARRANTY

CE, UL, RoHS. 5-year limited warranty. Actual performance may differ as a result of end-user environment and application.



PRODUCT DIMENSIONS

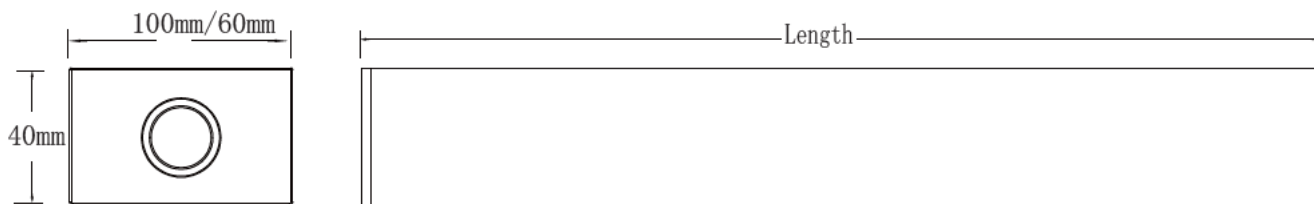

Available lengths are 600mm / 900mm / 1200mm / 1500mm



LED LINEAR ARCHITECTURAL LINKABLE LUMINAIRE
SERIES 065

ORDERING EXAMPLE: 065-AL2-30-40-60mm-CL-SP

FORM FACTOR	WATTAGE	CCT	WIDTH	LENS	MOUNT TYPE
065-AL2=600 mm Linear Luminaire	20=20W	30=3000K	60mm=60 millimeters	CL=Clear Lens	[Blank]=Surface Mount
065-AL3=900mm Linear Luminaire	30=30W	40=4000K	100mm=100 millimeters	FR=Frosted Lens	SP=Suspended Mount
065-AL4=1200 mm Linear Luminaire		50=5000K			
065-AL5=1500mm Linear Luminaire		65=6500K			
	40=40W				
	50=50W				
	60=60W				

TECHNICAL PARAMETERS

Fixture	065-AL2-20-XX-XX		065-AL3-XXWD-30-XX-XX		065-AL4-XXWD-40-XX-XX	
Input Voltage (AC)	100V-277V / 220-240V		100V-277V / 220-240V		100V-277V / 220-240V	
Power Frequency	50/60 Hz		50/60 Hz		50/60 Hz	
Rated Wattage	20W		30W		40W	
Lens	Frosted	Clear	Frosted	Clear	Frosted	Clear
Delivered Lumens	2,800lm	3,000lm	4,200lm	4,500lm	5,600lm	6,000lm
Efficacy	140lm/W	150lm/W	140lm/W	150lm/W	140lm/W	150lm/W
CRI	80					
CCT	3000K / 4000K / 5000K / 6500K					
Lifespan (Hours)	50,000					
Power Efficiency	≥0.89					
THD	<20%					
Dimming	Non-dimmable					
Operating Temperature	100V-277V -20°C to +40°C / 220-240V -40°C to +85°C					


Fixture	065-AL5-XXWD-50-XX-XX		065-AL5-XXWD-60-XX-XX	
Input Voltage (AC)	100V-277V / 220V-240V		120V-277V	
Power Frequency	50/60 Hz		50/60 Hz	
Rated Wattage	50W		60W	
Lens	Frosted	Clear	Frosted	Clear
Delivered Lumens	7,000lm	7,500lm	8,400lm	9,000lm
Efficacy	140lm/W	150lm/W	140lm/W	150lm/W
CRI	80			
CCT	3000K / 4000K / 5000K / 6500K			
Lifespan (Hours)	50,000			
Power Efficiency	≥0.89			
THD	<20%			
SDCM	<6			
Dimming	Non-dimmable			
Operating Temperature	100V-277V -20°C to +40°C / 220-240V -40°C to +85°C			




MOUNT AND INSTALLATION

Standard mounting and installation are surface (ceiling) mount.


A: Make a right position and screw hole.

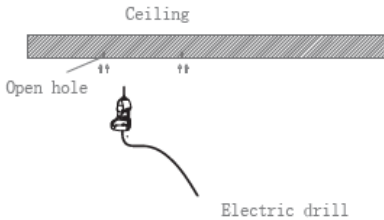


B: Install and fix the lamp with a screw.

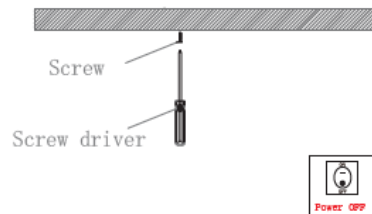

C: Adjust the position of the fixture and clean it.

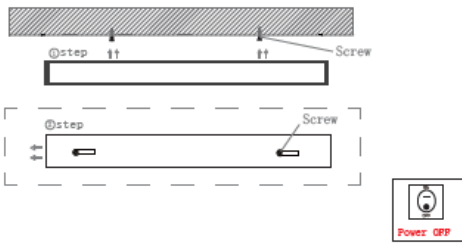


D: Adjust the position of the fixture and clean it.

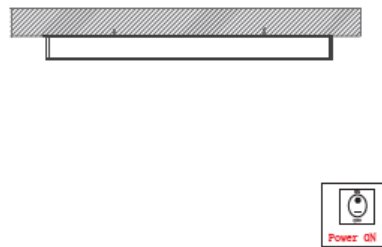


Optional: Installation of Suspended Mount


A: Make a right position and screw hole.

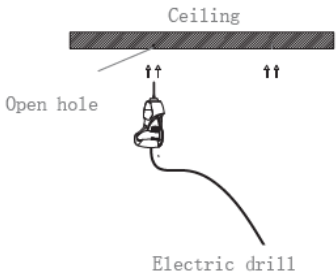

B: Screw the steel cable onto the ceiling.

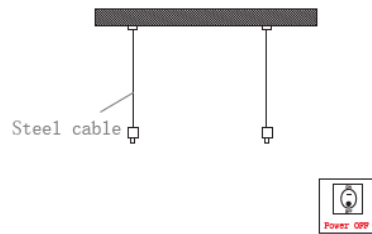

C: Hang the fixture under the steel cable and secure the fixture by steel cable.

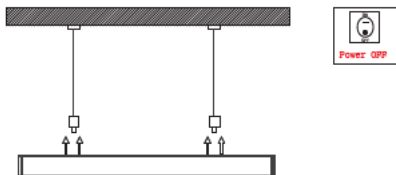

D: Adjust the position of the fixture and clean it.

