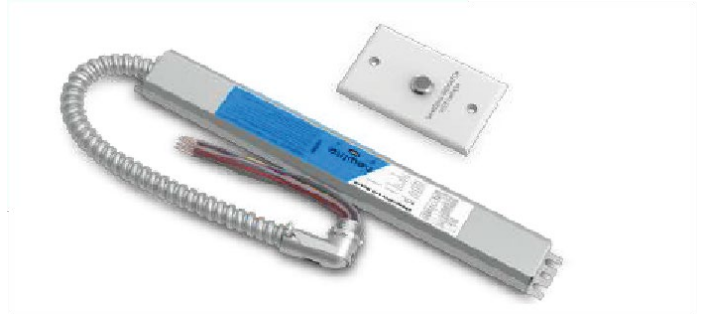


**FEATURES**

- 100-347V
- 90-minute Emergency Operation
- Factory or Field Installation
- Constant Output Power
- Self-Testing Features
 - Monthly 30-second test
 - Annually 90-minute test
- Compatible with Dimming and Non-dimmable Fixtures
- Multiple Mounting Configurations
- Rated for Damp Location, Plenum, Enclosed and Gasketed Fixtures

**ORDERING INFORMATION**

144-LEDEMBBP-347

SPECIFICATION

Input Voltage	100-347V, 50/60Hz	100-347V, 50/60Hz
Output Power	8W	18W
Input Power	7 Watts (max.)	7 Watts (max.)
Power Voltage	170Vdc	170Vdc
Input Current	100mA (max.)	100mA (max.)

EMI (Radiated and Conducted)	FCC Class A (charge and emergency modes)
Recharge Time	24 Hours
Surge Protection	ANSI/IEEE C62.41.2-2002
Battery	Lithium
Operating Temperature	5°-50°C (41°-122°F)
Size	L6.8" x H5.47" (173mm x 139mm)
Warranty	5 Year Full Warranty

CERTIFICATION - COMPLIANCE - RATINGS

- UL924
- CEC Title 20
- RoHS Compliant

**PRODUCT DIMENSIONS**

Case: 13.58" (345mm) x 1.57" (40mm) x .0827" (28mm)

Flexible Conduit 13.78" (350mm)

