



LED Tri-Proof Vapor Tight Multi Wattage Multi CCT



2 Foot - 20W / 25W / 30W



4 Foot - 30W / 40W / 50W
8 Foot - 60W / 80W / 100W



FEATURES

- IP65 rated
- NSF rated for splash zone and nonfood zone
- UL 1598 suitable for wet location
- 50,000 hours lifetime

APPLICATIONS

- Warehouses
- Factories
- Garage
- Parking Lot



CONSTRUCTION Polycarbonate housing and white cover.	DIMMING Not dimmable.
OPTICAL SYSTEM Seoul 2835 LED chips. 110° beam angle.	INSTALLATION AND MOUNTING Surface mount.
ELECTRICAL 120-277V input. -20°C to 40°C (-4°F to 104°F).	WARRANTY 5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

OPTIONAL ACCESSORIES



Emergency Back-up Driver
120-EMBU-15W-050



Internal Motion Sensor
120-MS-VT-BMD



LED Tri-Proof Vapor Tight Multi Wattage Multi CCT

Part Number 120-2VTPXX-30-50-27

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD
20W	3500K/4000K/5000K	2,264LM	113.2lm/W	120-277V	80	.9	20%
25W	3500K/4000K/5000K	2,830LM	113.2lm/W	120-277V	80	.9	20%
30W	3500K/4000K/5000K	3,396LM	113.2lm/W	120-277V	80	.9	20%

Part Number 120-4VTPXX-50-50-27

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD
30W	3500K/4000K/5000K	3,429LM	114.3lm/W	120-277V	80	.9	20%
40W	3500K/4000K/5000K	4,572LM	114.3lm/W	120-277V	80	.9	20%
50W	3500K/4000K/5000K	5,715LM	114.3lm/W	120-277V	80	.9	20%


Part Number 120-8VTPXX-100-50-27

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD
60W	3500K/4000K/5000K	6,865.2LM	114.42lm/W	120-277V	80	.9	20%
80W	3500K/4000K/5000K	9,153.6LM	114.42lm/W	120-277V	80	.9	20%
100W	3500K/4000K/5000K	11,442LM	114.42lm/W	120-277V	80	.9	20%

Part Number 120-4VTPXX-30-50-27-MS (Pre-installed Motion Sensor)

WATTAGE SELECTABLE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD
30W	3500K/4000K/5000K	3,429LM	114.3lm/W	120-277V	80	.9	20%
40W	3500K/4000K/5000K	4,572LM	114.3lm/W	120-277V	80	.9	20%
50W	3500K/4000K/5000K	5,715LM	114.3lm/W	120-277V	80	.9	20%

PRODUCT DIMENSIONS

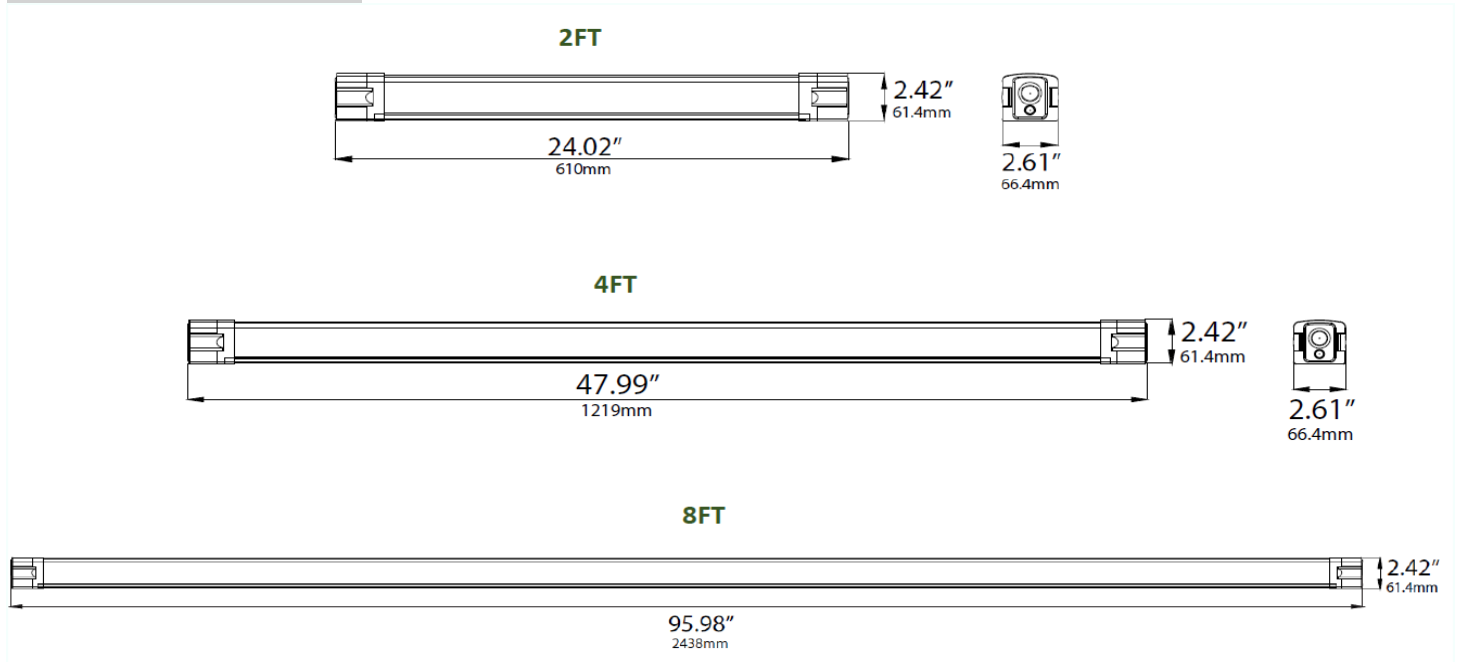



LED Tri-Proof Vapor Tight Multi Wattage Multi CCT
