



# LED Tunable Linear Strip - Series 061

## LED'G THE WAY IN LIGHTING!

The 061 SERIES - LED Tunable Linear Strip, 130 lm/W, IP44 Wet Location, Select 3X-CCT (3500K, 4000K, 5000K) and 3X-Wattages, 0-10V Dimmable, Premium Indoor Luminaire, Smart Sensor Ready.

Project:
Date:
Catalog No:
Prepared By:

4-FT and 8-FT Models



### FEATURES

Lumen Output	3350 to 8580 lumens
Efficacy	130 lm/W
Input Voltage	120-277V
Dimmable	0-10V Continuous
CCT	Select (3500K, 4000K, 5000K)
IP Rating	IP44 Wet Location
Size	4-FT, 8-FT
Warranty	7 Years

### Applications

Premium indoor luminaire for hanging or surface mounting in ceiling spaces less than 25 feet. Suitable for gymnasiums, warehouses, manufacturing, packaging, storage, aisles, workstations, and covered decks.

### Construction

Manufactured for durability using aluminum sheet housing with semi-gloss coating to resist corrosion, discoloration, and scratching. IP44 Wet Location rated for protection against solid objects 1.0mm diameter and greater, splashing water: IEC 60529.

### Electrical

Input voltage 120-277V models with 0-10V Continuous Dimming. Includes 3X-CCT and 3X-Wattage Tuning Switches. Operating temperatures -4°F to 104°F (-20°C to 40°C).

### Mounting

Aluminum Surface Mount Brackets and J-Box Cover Kit standard. Optional V-Hooks and Chains for hanging available.

### Optics

Anti-UV Frosted Prismatic Polycarbonate Lens.

### Controls

Fixture mounted Daylight, Bi-Level Dimming, and Motion Detection Sensor available.

### Emergency

Integrated install 8W 90 Minute Emergency Battery Backup available.

### Listings

UL certified to meet US and Canadian standards. FCC, CE and RoHS compliant. Listed to qualify for energy-efficient LED lighting rebates.

### Warranty


7 yr /75K hrs.

### Correlated Color Temperatures (CCT)

3500K

4000K

5000K



## SPECIFICATIONS

### Energy Data

Input Voltage: 120-277V

Input Frequency: 50/60 Hz

Wattage: Select (25W, 30W, 40W), (54W, 60W, 65W)

Power Factor: >0.9

Total Harmonic Distortion (THD): <10%

Operating Temperature: -4°F to 104°F (-20°C to 40°C)

### Lighting Data

Lumens: Select (3350, 4020, 5360), (7128, 7920, 8580)

Lumens Per Watt: 130 lm/W

Color Correlated Temperature (CCT): Select (3500K, 4000K, 5000K)

Dimmable: 0-10V

Color Rendering Index (CRI): >80

L70: 75000 hours

## ORDERING INFORMATION

Model	Size	Wattage	Voltage	Current	Lumens	Efficacy	CCT	Dimming	Color	Dimensions	Weight
061-TLS-4-40W	4-FT	(25W	120-277V	0.21A@120V, 0.09A@277V	3350	134 lm/W	(3500K,	0-10V	White	47.99"L x 3.56"W x 3.35"H	5.80 lbs
		30W		0.25A@120V, 0.11A@277V	4020		4000K,				
		40W)		0.33A@120V, 0.14A@277V	5360		5000K)				
061-LSPT-8-65W	8-FT	(54W	120-277V	0.45A@120V, 0.19A@277V	7128	132 lm/W	(3500K,	0-10V	White	94.25"L x 3.56"W x 3.35"H	12.00 lbs
		60W		0.50A@120V, 0.22A@277V	7920		4000K,				
		65W)		0.54A@120V, 0.23A@277V	8580		5000K)				

Mount	Sensor	Accessory
061LSVHC	V-Hooks and Chains	Leviton OSHFU-ITW
(Blank)	Surface Mount Brackets and J-Box Cover Kit (Standard)	Leviton HB011-PDX
		Leviton OSFLO-W
		(Blank)

PIR Fixture Mount Occupancy Sensor

PIR Fixture Mount Dimming Sensor with Daylight Harvesting

SNAP LOCK Offset Adapter

None

8W-L/EM-25 Slim Combo


(Blank)

Internal Install - Emergency 90-min 8W Battery Backup and 25W Driver


None

## PRODUCT DIMENSIONS


4-FT Models 47.99"L x 3.56"W x 3.35"H



8-FT Models 94.25"L x 3.56"W x 3.35"H



## PHOTOMETRIC

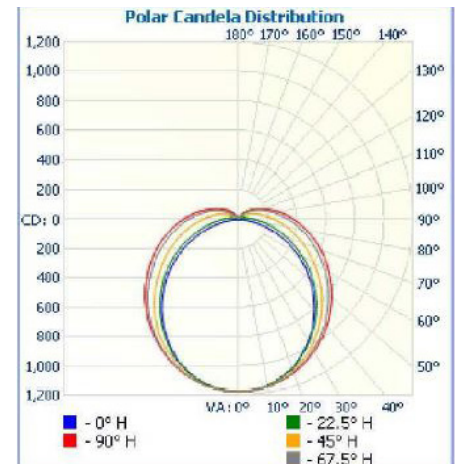

\*Example of 4-FT 25W

