



SPECIFICATION SHEET

LED UFO High Bay Multi Watt 5000K and Multi Watt Multi CCT



80W / 100W / 150W – CCT: 5000K



180W / 200W / 250W – CCT: 5000K



300W – CCT: 5000K



80W / 100W / 150W

Available in Black or White
Multi CCT: 3000K / 4000K / 5000K



8 Foot Cord

Standard Feature on 120-277V Models

FEATURES

- IP66 Rated
- Built-in Surge Protector 6KV
- 8 Foot Cord (120-277V models only)
- Corrosion Resistant
- 50,000 hours lifetime

APPLICATIONS

- Warehouse
- Manufacturing Facilities
- Convention Centers
- Sporting Arenas
- Big-box Retail Stores
- Gymnasiums

CONSTRUCTION

Aluminum Alloy. Corrosive resistant polyester powder coat finish. PC3000U lens.

OPTICAL SYSTEM

Philips Lumiled 3030 LED chips. Standard 120° beam angle. 60° beam angle option for 300W model only.

ELECTRICAL

Available as 100-277V input or 277-480V input. -30°C to 50°C (-22°F to 122°F).

DIMMING

1-10V.

INSTALLATION







Hook Mount. U-Bracket option for multi wattage model.

WARRANTY

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

OPTIONAL ACCESSORIES: All Models

OPTIONAL ACCESSORIES: Model Specific

OPTIONAL ACCESSORIES: All Models			OPTIONAL ACCESSORIES: Model Specific		
					
Emergency Back-up Driver 120-EMB-UFO-25WHV	Motion Sensor 120-MSU-BM-ANT54T	Remote Control 120-RCU-100	Multi Wattage Models Only PC Reflector 120-SH-UFOX-PCF	300W Model 60° Lens 120-LN-UFO-300W-60	Multi Wattage Models Only U-Bracket 120-MT-UFOX-UB





SPECIFICATION SHEET

LED UFO High Bay Multi Watt 5000K
and Multi Watt Multi CCT

Part Number 120-UFOX-T150-50-27-DIM

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
80W	5000K	12,000LM	150lm/W	100-277V	70	.95	15%	175W-600W HID
100W	5000K	15,000LM	150lm/W	100-277V	70	.95	15%	175W-600W HID
150W	5000K	22,500LM	150lm/W	100-277V	70	.95	15%	175W-600W HID

Part Number 120-UFOX-T250-50-27-DIM

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
180W	5000K	27,000LM	150lm/W	100-277V	70	.90	15%	600W-1,000W HID
200W	5000K	30,000LM	150lm/W	100-277V	70	.95	15%	600W-1,000W HID
250W	5000K	37,500LM	150lm/W	100-277V	70	.95	15%	600W-1,000W HID


Part Number 120-UFO-300-50-27-DIM

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
300W	5000K	45,000LM	145lm/W	100-277V	70	.95	15%	600W-1,000W HID


Part Number 120-UFOXX-150-50-27-DIM-Color / Color Options (WH) White or (BL) Black

WATTAGE	CCT SELECTABLE	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
80W	3000K / 4000K / 5000K	11,600LM	145lm/W	100-277V	70	.95	15%	175W-600W HID
100W	3000K / 4000K / 5000K	14,500LM	145lm/W	100-277V	70	.95	15%	175W-600W HID
150W	3000K / 4000K / 5000K	21,750LM	145lm/W	100-277V	70	.95	15%	175W-600W HID


PRODUCT MEASUREMENTS



80W / 100W / 150W

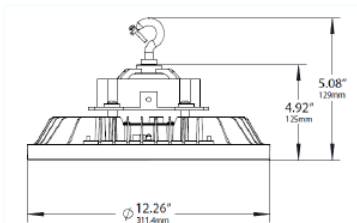

180W / 200W / 250W

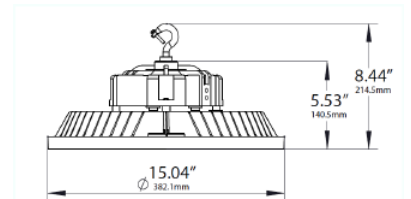

300W

