




Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED 120-CPSQ MW MCCT Canopy Light with 8W Emergency Battery

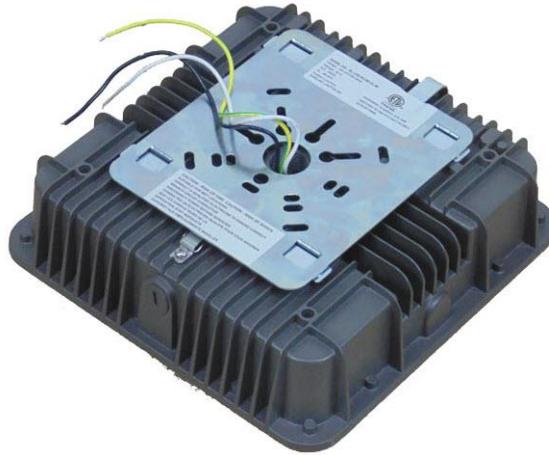

FEATURES

- Default Wattage: 75W
- Default CCT: 5,000K
- IP65 rated
- Easy installation and maintenance
- Corrosion and rust proof
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Warehouses
- Stadiums
- Factories
- Parking Lots
- Shopping Malls
- Supermarkets
- Logistic Centers
- Auto dealerships

CONSTRUCTION:

Heavy die-cast aluminum housing with polyester powder-coated finish

OPTICAL SYSTEM:

Seoul 2835 LED chips. Frosted lens. 135° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V input. -20°C to 50°C, -4°F to 122°F

INSTALLATION & MOUNTING:

Wall Mounting with quick mount back plate for easy installation.

CONTROLS & DIMMING:


0-10V dimming comes standard.



MODEL NUMBER – 5,000K	WATTAGE	LUMENS	EFFICACY	CRI	POWER FACTOR	THD	REPLACES
CPSQ-MW(40/50/60/75)MCCT(30/40/50)DLV-EM	40W	5,200LM	130LM/W	70	0.9	20%	100W – 320W HID
CPSQ-MW(40/50/60/75)MCCT(30/40/50)DLV-EM	50W	6,500LM	130LM/W	70	0.9	20%	100W – 320W HID
CPSQ-MW(40/50/60/75)MCCT(30/40/50)DLV-EM	60W	7,800LM	130LM/W	70	0.9	20%	100W – 320W HID
CPSQ MW(40/50/60/75)MCCT(30/40/50)DLV-EM	75W	9,750LM	130LM/W	70	0.9	20%	100W – 320W HID

Series	Wattage Options	Color Temperature Options	Dimming	Voltage	Additional
120-CPSQ	40W 50W 60W 75W	3000K 4000K 5000K	D = 0-10V	LV = 120-277V	EM = Emergency Battery

MEASUREMENTS

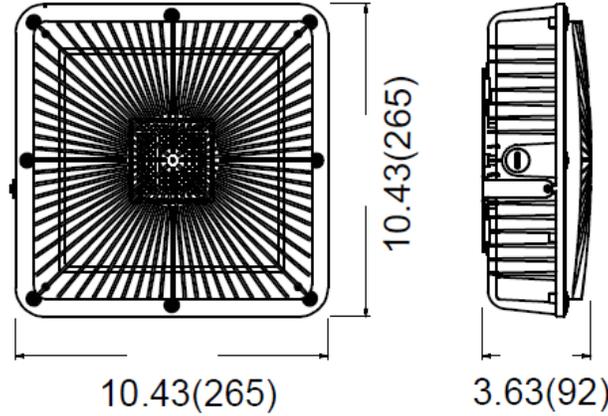

OPTIONAL ACCESSORIES



Microwave Sensor
(Compatible with remote control)



Remote
Control RC-100