



BELLE
LIGHT
CONSTRUCTION
EQUIPMENT



Altrad-Belle.com

PRO 600X

COMPACT POWER TROWELS

A small, 600mm diameter power trowel for producing a high specification finish on concrete.

The Pro 600X Trowel is compact and ideal for confined areas. The spinning guard enables wall-to-wall trowelling.

Ideal for small areas, up to walls and through doorways. The electric option allows working in buildings without special ventilation.



BUILDING A SUSTAINABLE FUTURE.

FEATURES & BENEFITS

- Narrow design enables trowelling through doorways.
- Folding handle for compact storage.
- Complete with float pan for pre-surface finishing.
- Clutch control system enables easy starting and ultimate control.
- Spinning guard ring for wall-to-wall trowelling.
- Honda or Loncin petrol & 230v electric versions available.

TECHNICAL SPECIFICATIONS

Model	Pro 600X	
Maximum Torque		115
Trowelling Diameter	(mm / in)	600 / 24
Width	(mm)	725
Height	(mm)	1020
Length	(mm)	1580
Sound Power Level	(dB L _{WA})	104

Model	Pro 600X Honda GX160	
Part No.		MT06
Engine Power	(Hp / kW)	4.8 / 3.6
Trowelling Speed	(rpm)	50-115
Weight	(kg)	70
Vibration Level	(m/sec2)	9.51

Model	Pro 600X Loncin H135	
Part No.		MT07
Engine Power	(Hp / kW)	3.5 / 2.6
Trowelling Speed	(rpm)	50-115
Weight	(kg)	68
Vibration Level	(m/sec2)	9.51


Model	Pro 600X 230v Electric	
Part No.		MT03
Engine Power	(Hp / kW)	3.0 / 2.2
Trowelling Speed	(rpm)	115
Weight	(kg)	70
Vibration Level	(m/sec2)	4.63

Options

Float Pan	945/00200
Finishing Blades (x4)	945/99518



SPINNING GUARD RING ALLOWS WALL-TO-WALL TROWELLING

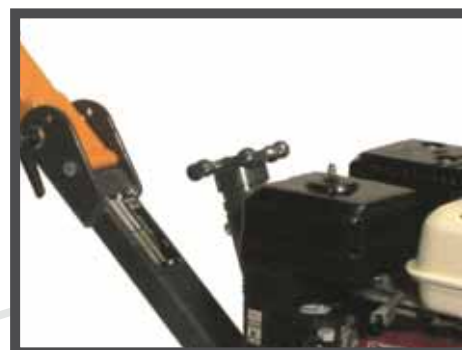

'SCREW PITCH' FOR EASY BLADE ADJUSTMENT



FOLDING HANDLE FOR EASY STORAGE

ALTRAD BELLE RESERVES THE RIGHT TO AMEND OR IMPROVE ANY SPECIFICATIONS IN THIS BROCHURE WITHOUT NOTICE.

