



# UNDERMOUNT VANITY SINK INSTALLATION

For Models: 3SM205 (Oval); 3SM207M (Rectangle)


**ATTENTION!** Please inspect your sink thoroughly to ensure there are no damages or defects PRIOR to installation. To avoid breakage and possible injury, please handle the sink with care as it is a fragile product. Additionally, to avoid damage to your vanity top, install the sink such that future removal from under the vanity top is possible. Warranty DOES NOT cover costs for installation and/or removal of sink.

## TOOLS AND MATERIALS (not included, except \*)



Pencil / Damp Cloth / Thread Sealant / Basin Wrench / Epoxy / Silicone Sealant / Sink Basin / \*Hardware Kit

## UNDERMOUNT SINK INSTALLATION FOR GRANITE, MARBLE OR SOLID SURFACE VANITY TOPS

1. Carefully turn the vanity top over so that it rests up-side-down on a stable, cushioned surface.
2. Position the sink over the sink cutout. Make sure the sink is centered with the faucet hole and evenly spaced between the bolt holes.
3. Draw an outline of the sink on the vanity top.

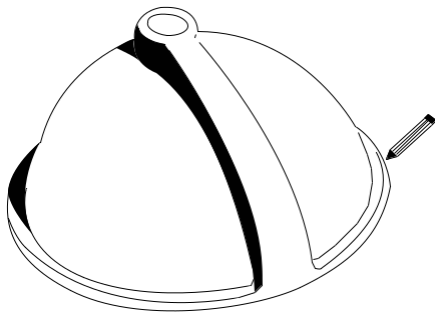

4. Remove the sink from the vanity top. Apply a generous bead of silicone around the sink rim.

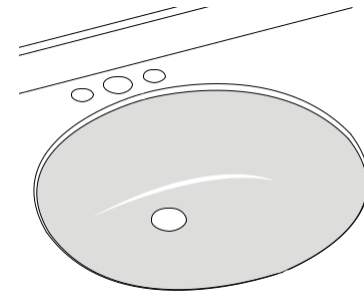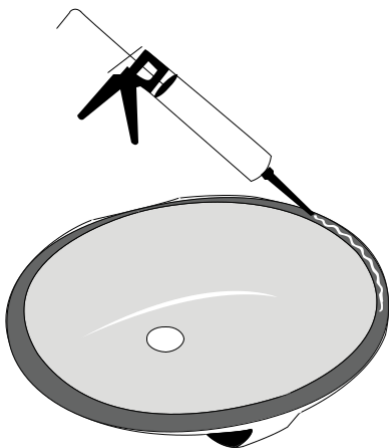

5. Carefully place the sink upside down on the vanity top, positioning it within the outline. Allow time to dry.
6. Fill in small holes surrounding sink with epoxy. Immediately place top of bolt in the hole with epoxy. Allow for sufficient dry time. Attach the sink clips by placing the long end of bracket flat against the sink lip. Screw the wing nuts through the brackets and bolt holes, tighten snugly.
7. Carefully turn the top and sink over and gently place on the vanity.

## FAUCET AND DRAIN INSTALLATION

1. Install faucet (not included) and vanity top (not included) per manufacturer's instructions.
2. Connect supply line to faucet (finger tight) and carefully bend tubes to engage with the water supply shut-off valves. Tighten connections at faucet and shut-off valves for a watertight seal.
3. Hand-tighten trap to drain assembly then check alignment. It may be necessary to cut off part of the tailpiece or part of the horizontal leg of the trap to ensure a proper fit. Secure joints for watertight assembly.

## QUESTIONS?

Contact Customer Service: 253.813.5692 or at [customerservice@3ssplendidintl.com](mailto:customerservice@3ssplendidintl.com)