

MotoCarts

Move Product Safely

Standard or custom MotoCarts For Your Application.
Call us for **your specific needs** or choose from the designs below.

Shown With Optional Enclosure

Standard Model



Transport Food Without Spilling



Basket Carrier Model



Custom Designed For Your Application



Contact:

(619) 562-1486

www.servesmart.net

MOTOCART-LIFT



HEIGHT CONTROL

Position load of up to 1000 lbs. at best working height for operator.

SAFETY

Automatic stop and hold when operator releases controls, even on inclines.

FULL-SHIFT USE

Plug on-board smart charger into standard wall outlet to recharge overnight.

The **MotoCart LIFT** Electric Lift Cart can safely move and lift loads up to 1000 pounds. This rugged, easy-to-operate motorized electric lift cart platform reduces workplace injuries and improves staff efficiency. Safely move food, beverages and supplies. **ServeSmart** will customize as requested.

Model #	Vertical Travel	Payload Capacity	Lift Speed (sec)	Platform Height		Platform Size
				Minimum	Maximum	
SS-MCL	45.5"	1,000 lbs.	17	18.5"	64"	23" x 43.5"

SIMPLE TO OPERATE

CUSTOMIZABLE

We will modify to your needs

(619) 562-1486

www.servesmart.net

8021 Wing Ave
El Cajon, Ca



Specifications and Options

MotoCart Self Propelled Electric Platform Truck with the following specifications:

Model: MotoCart

- Capacity: 1,100 lbs.
- Platform Size: 24" x 45.5" useable
- Overall Size: 25" x 52.5"
- Platform Height: 12.5" from floor
- Incline Rating: 1,000 lbs at 6°
- Maximum Travel Speed: 2.6 MPH




MotoCart Standard Features:

- 24 volt electrical system
- Durable transaxle drive
- Maintenance Free Batteries with Built-in Charger (2-33 AH)
- Automatic braking (dynamic regenerative)
- Automatic parking brake
- Stop Switch (Belly Bump)
- Variable Speed Control (Curtis 110 AMP)
- LED Battery level gauge
- 4-Wheel Unit, Pneumatic Drive Tires, Poly Casters
- Key switch
- Color: White



Custom Modifications Available

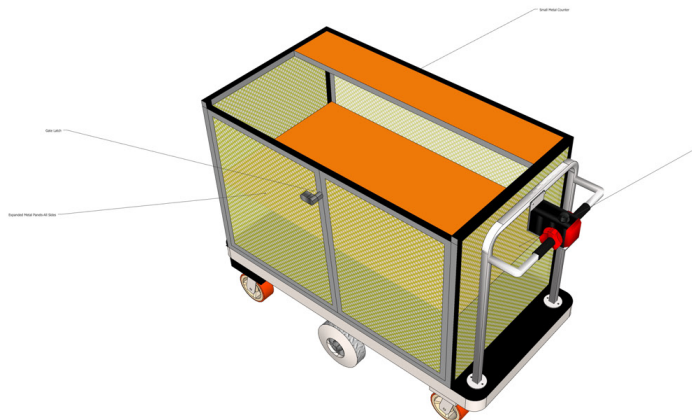

Call 619.562.1486 Fax 619.562.6031

www.servesmart.net

